



BN31M1P **BRAD NAILER**

SPECIFICATIONS

Trigger	Selectable
Op. Pressure	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 CPM)	2.4 scfm
Air Inlet	¼" NPT
Weight	3.0 lbs (1.4 kg)
Height	9.75" (248 mm)
Length	10.5" (267 mm)
Width	2.5" (65 mm)
Main Body Material	Aluminum

FASTENERS


Series	AX
Capacity	110
Range	⅝" - 2⅜" (16mm - 55mm)
Shank/ Gauge	.047" (1.19mm)/ 18 ga
Collation	Straight glued strip

INCLUDES

Carrying Case
¼" Fitting

SOLD SEPARATELY

Parts Kit
YK0908 Repair Kit

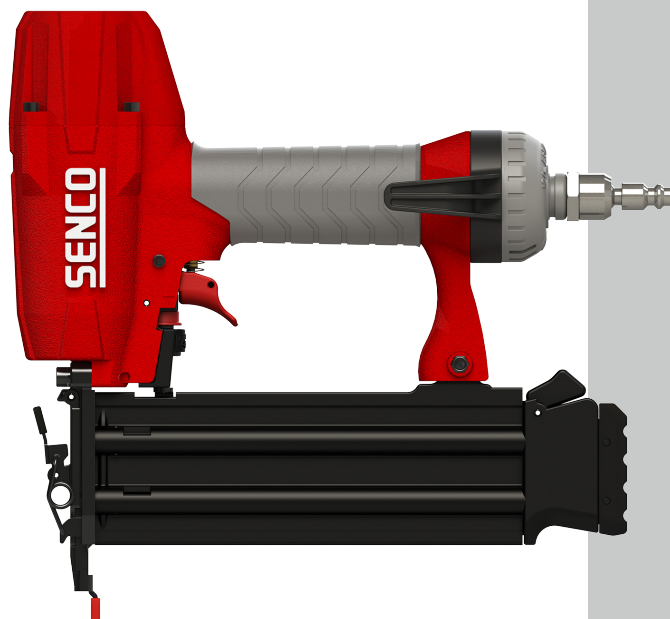

2⅛" BRAD NAILER

The durable and lightweight BN31M1P is equipped with a number of quality-of-life features that make it ideal for all-day use. The tool comes outfitted with a dry fire lockout, which reduces wear on the tool and indicates when to reload. Additionally, SENCO's oil-less design saves the user the hassle of oiling the tool prior to use, saving you time and money. Capable of driving 18-gauge brad nails from ⅝" to 2⅜" in length, this nailer is ideal for finish and trim applications where you want the power to drive through dense materials without splitting the work surface.

TOOL OVERVIEW

- Oil-less design eliminates the need for routine lubrication
- Dry fire lockout reduces tool wear and indicates when to reload
- Selectable trigger to switch between contact or sequential firing modes
- Quick clear latch to easily clear jams or misfeeds
- Tool-free depth adjustment for consistent flush or countersunk drives

APPLICATIONS

Finish and trim, woodworking, paneling, casing, molding, chair rail, decorative trim.



2 1/8" BRAD NAILER



- | | | |
|---|---|---|
| 1 OIL-LESS DESIGN
Routine lubrication is not required. Saving you time with daily maintenance | 5 TOOL-FREE DEPTH ADJUSTMENT
For consistent flush or countersunk drives | 9 NO-MAR PAD
Protects the worksurface from being scratched or damaged. Extra no-mar pad included. |
| 2 DRY FIRE LOCKOUT
Reduces tool wear and indicates the need to reload fasteners | 6 360° ADJUSTABLE EXHAUST
Directs air away from the operator and worksurface | 10 RELOAD INDICATOR
Allows the user to quickly identify when it's time to reload (not visible, on reverse side of tool) |
| 3 SELECTABLE TRIGGER
Makes it easy to switch between contact or sequential firing modes | 7 ROTATABLE BELT HOOK
Provides quick right/left hand access when needed | 11 SWIVEL PLUG
For added maneuverability |
| 4 QUICK CLEAR LATCH
Remove jams or misfeeds without the use of a tool | 8 ERGONOMIC OVERMOLDED GRIP
Reduces fatigue and increases control of the tool | 12 ALUMINUM MAINBODY
Durable and lightweight |

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. For additional information on Senco fastening systems and how Senco will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: www.Senco.com.