




FinishPro®18 SPECIFICATIONS

Item #	1U0001N
Trigger	Contact
Op. Pressure	70-95 psi (4.8 - 6.6 bar)
Air Inlet	1/4" NPT
Weight	3.1 lbs (1.6 kg)
Height	9.3" (238 mm)
Length	9.75" (248 mm)
Main body material	Aluminum

PC1010 COMPRESSOR SPECIFICATIONS

Power source: Electric	
Moter:	Induction
Max. amp:	4 amps @115V
Horsepower:	1/2 hp.(running)
Pump:	Oil-less
SCFM @ 90 psi:	0.7
Pump-up time:	125 seconds
Recovery time:	30 seconds
Max pressure:	135 psi
Tank storage:	1 gallon
Weight:	20 lbs. (9.07 kg)
Dimensions:	length 14", height 13", width 10"

FASTENER SPECIFICATIONS



Capacity	110
Range	5/8" - 2" (16mm - 50mm)
Shank/Gauge	.0468"/18 ga.
Collation	Straight glued strip
Series	AY

INCLUDES

- 1 year limited warranty
- Hose, tool oil, air fittings, safety glasses, wrenches, variety pack of 18 ga. nails

PC0947 COMBO KIT

18_{GA}

18 Ga. Brad Nailer Combo Kit

ITEM #PC0947

Everything to get you started on your finish project. 1-gallon PC1010 compressor, a 2" FinishPro 18 ga. brad nailer, coil hose, air fittings, safety glasses and fasteners in one kit.

APPLICATIONS

- Interior trim, cabinets, chair rail, crown molding, baseboards, book shelves and exterior trim

FEATURES AND BENEFITS

FinishPro18

- 2", 18 ga. brand nailer
- With adjustable depth-of-drive control, adjustable exhaust, belt hook, soft grip and no-mar pad - for your convenience

PC1010 Compressor

- 1/2 hp.(running), 1 gal. oil-less motor compressor
- 4 amps @ 115V, 120 PSI Max Output
- 1/4" quick disconnect coupler and regulator
- Individual gauges for tank and regulated output pressure
- Lightweight - 20 lbs. (9.09 kg)

SOLD SEPARATELY

PARTS KIT

YK0393

Repair kit

PC0947 COMBO KIT

18 Ga. Brad Nailer Combo Kit

ITEM #PC0947



Choose the right actuation mode

Sequential Actuation (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tool to ensure proper use and safety precautions. For additional information on SENCO fastening systems and how SENCO will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: senco.com



PC1010N
GRAINGER #43YN52

SPECIFICATIONS

Weight	21 lbs (9.53 kg)
Height	12.25" (311 mm)
Length	11.5" (356 mm)
Width	14" (356 mm)
Motor	Induction
Power Source	Electric 115 volts
Power Type	Corded
Current Draw /Max AMPs	4 amps @115V
Horsepower	0.5 hp (running)
Pump	Oil Free
SCFM at 90 psi	0.7
Max Pressure	135 psi
Pump-up Time	125 Seconds (0 - 135 psi)
Recovery Time	30 Seconds (105 - 135 psi)
Tank Storage	1 gallon
1/4" Quick Connect Coupler	1
Regulator	Yes
CSA Approved	Yes



1 Gal. Finish & Trim Air Compressor ITEM #PC1010N GRAINGER #43YN52

An upgrade to SENCO's iconic, proven PC1010 1-gallon finish & trim air compressor, the PC1010N is designed with the professional contractor in mind. SENCO maintained the ultra-quiet performance, lightweight, compact design and oil-free pump and added a roll-cage and integrated control panel and increased maximum PSI to 135. The result: even easier operation for woodworking and finish and trim applications.

INCLUDES

- 1 year limited warranty
- 1/4" universal coupler

ACCESSORIES SOLD SEPARATELY

DRAIN PLUG 1/4" MPT	PC0357
BLOW GUN 1/4" FPT	PC0489
TEFLON® THREAD SEALING TAPE	PC0349

APPLICATIONS

- Finish and trim

FEATURES AND BENEFITS

- Heavy-duty induction motor – efficient, long life operation
- Oil-free pump design – maintenance free
- Ultra-quiet operation – 68 dBA
- Ultra-light at only 21 pounds

AVAILABLE THROUGH
GRAINGER®
FOR THE ONES WHO GET IT DONE

PC1010N

1 Gal. Finish & Trim Air Compressor

ITEM #PC1010N GRAINGER #43YN52



Integrated Control Panel

- Gauge visibility
- Easy access to coupler and pressure control knob

Comfort Grip
light and easy to carry

Heavy Duty Roll Cage
protects critical components

Ultra-quiet - 68 dBA

Draws only 4 amps

Oil-free Pump

1 Gallon Tank

Ultra-light
at only 21 lbs.

Non-Slip Rubber Feet
protects work surface



Always read the Operators Manual and Safety Instructions with all tool to ensure proper use and safety precautions. For additional information on SENCO fastening systems and how SENCO will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: senco.com



PC1131
GRAINGER #43YN56

SPECIFICATIONS


Weight	60 lbs (27.22 kg)
Height	14.5" (368 mm)
Length	20.5" (521 mm)
Width	16" (419 mm)
Motor	Induction
Power Source	Electric 115 volts
Power Type	Corded
Current Draw /Max AMPs	14 amps @115V
Horsepower	2 hp (running)
Pump	Oil-Splash
SCFM at 90 psi	4.4
Max Pressure	125 psi
Pump-up Time	67 Seconds (0 - 125 psi)
Recovery Time	16 Seconds (90 - 125 psi)
Tank Storage	4.3 gallon
¼" Quick Connect Coupler	1
Regulator	Yes
CSA Approved	Yes

INCLUDES

- 1 year limited warranty
- ¼" universal coupler
- Compressor oil

ACCESSORIES SOLD SEPARATELY

32 OZ COMPRESSOR PUMP OIL	PC0344
DRAIN PLUG ¼" MPT	PC0357
BLOW GUN ¼" FPT	PC0489
TEFLON® THREAD SEALING TAPE	PC0349

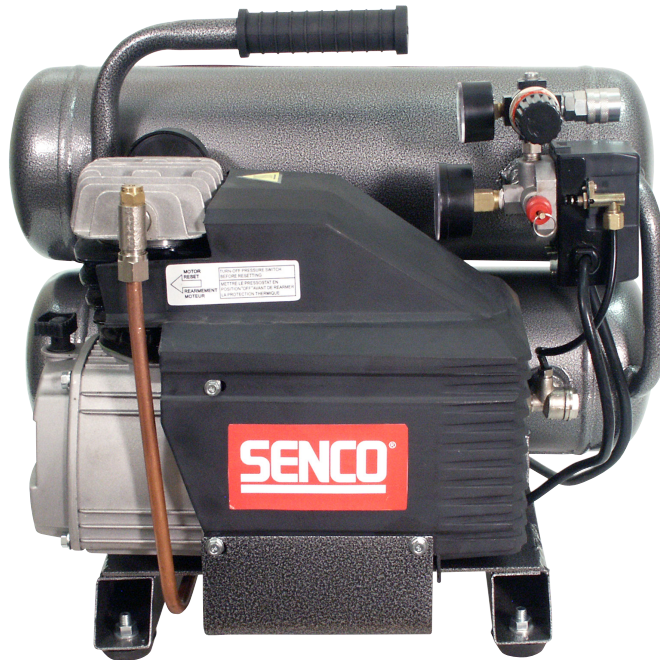

4.3-Gallon 2 HP (running) Compressor

ITEM #PC1131 GRAINGER #43YN56

SENCO's twin-stack PC1131 workhorse, oil-splash-lubricated compressor generates 4.4 CFM to provide power for all types of applications, from finish to framing. The cast iron cylinder and heavy-duty induction motor provide the durability expected by professional contractors.

APPLICATIONS

- Framing and Sheathing
- Roofing and Decking
- Finish and trim

FEATURES AND BENEFITS

- Cast iron cylinder for superior pump life
- Compact twin stack tank design
- Direct drive pump and induction motor for efficient operation
- Heavy duty induction motor
- Draws only 13 amps, so it won't trip circuit breakers
- Cold start valve allows for easy start-up in cold climates.
- Oil-Splash design for exceptional durability
- Electric overload protection switch with manual reset

AVAILABLE THROUGH
GRAINGER®
FOR THE ONES WHO GET IT DONE

PC1131

4.3-Gallon 2 HP (running) Compressor

ITEM# PC1131 GRAINGER #43YN56



4.3 Gallon Capacity
Ideal for framing, roofing, finish
nailers and staplers

Comfort Handle and Grip
good balance for easy transporting to the job site.

Cold Start Valve
easy start-up in cold weather.

Cast-iron Cylinder
improves pump life


Pump-up/Recovery Time
67 seconds pump-up,
16 seconds recovery.

High SCFM
4.4 SCFM @ 90 psi.

Low Amp Draw
only 14 amp reduce tripped circuits,
overload protection has manual reset.

Oil-lube/Direct Drive
induction motor
long life and efficient operation
improved durability.

Powerful and Fast
weighs just 60 lbs.

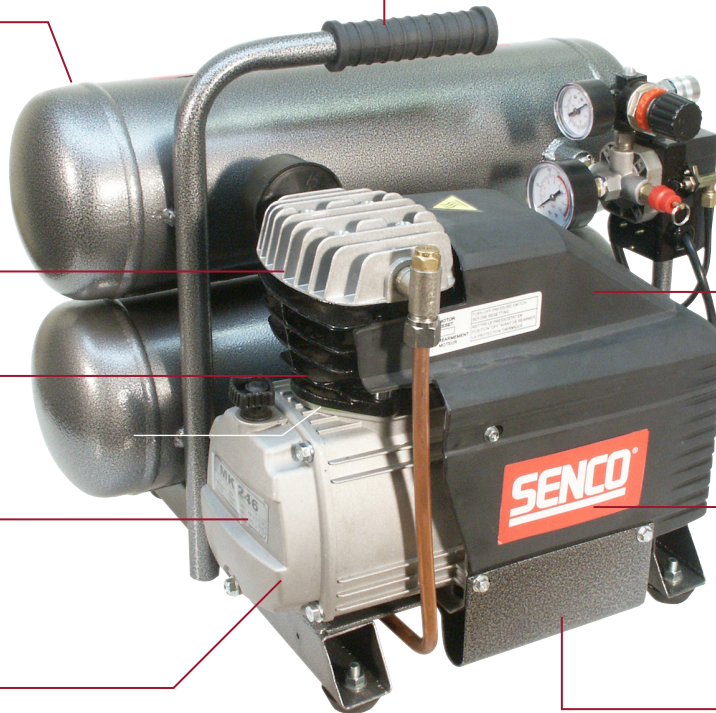

Always read the Operators Manual and Safety Instructions with all tool to ensure proper use and safety precautions. For additional information on Senco fastening systems and how Senco will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: senco.com



PC1280
GRAINGER #43YN57

SPECIFICATIONS

Weight	38 lbs (17.24 kg)
Height	18" (457 mm)
Length	17" (432 mm)
Width	16.3" (414 mm)
Motor	Universal
Power Source	Electric 115 volts
Power Type	Corded
Current Draw /Max AMPs	12 amps @115V
Horsepower	1.5 hp (running)
Pump	Oil-Free
SCFM at 90 psi	2.8
Max Pressure	150 psi
Pump-up Time	152 Seconds (0 - 150 psi)
Recovery Time	33 Seconds (120 - 150 psi)
Tank Storage	6 gallon
¼" Quick Connect Coupler	2
Regulator	Yes
CSA Approved	Yes

INCLUDES

- 1 year limited warranty
- 2 (dual) ¼" universal couplers

ACCESSORIES SOLD SEPARATELY

DRAIN PLUG ¼" MPT	PC0357
BLOW GUN ¼" FPT	PC0489
TEFLON® THREAD SEALING TAPE	PC0349



6-Gallon 1.5 HP (running) Compressor

ITEM #PC1280 GRAINGER #43YN57

The 6-gallon pancake air compressor designed with the power and speed to handle any finish and trim application. The PC1280 is compact, lightweight, and well balanced - it weighs only 38 lbs. - for easy portability. It's oil-free pump allows for maintenance free operation and the entire pump and motor are completely shrouded for safety.

APPLICATIONS

- Finish and trim

FEATURES AND BENEFITS

- Compact and balanced pancake tank design
- Lightweight - 38 lbs.
- Dual couplers - run 2 hoses simultaneously
- Draws only 12 amps, so it won't trip circuit breakers

AVAILABLE THROUGH
GRAINGER®
FOR THE ONES WHO GET IT DONE

PC1280

6-Gallon 1.5 HP (running) Compressor

ITEM# PC1280 GRAINGER #43YN57



High SCFM
2.8 SCFM @ 90 psi.

Lightweight
well balanced easy to carry.

Oil-Free Pump Design
maintenance free.

Fully Shrouded
protects critical components.

Easy to Read Gauges
150 Max psi

Dual Couplers
run 2 hoses simultaneously.

6 Gallon Capacity
Ideal for finish nailers and staplers.

Low Amp Draw
only 12 amp reduce tripped circuits,
overload protection has manual reset.

Non-Slip Rubber Feet
protects work surface.



Always read the Operators Manual and Safety Instructions with all tool to ensure proper use and safety precautions. For additional information on SENCO fastening systems and how SENCO will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: senco.com