

**SNS41****16_{GA}****17_{GA}**

GRAINGER #48LR68

TOOL SPECIFICATIONS

Trigger	Contact
Op. Pressure	80-120 psi (5.5 - 8.3 bar)
Air Consumption (60 CPM)	5.4 scfm
Air Inlet	3/8" NPT
Weight	4.6 lbs (2.1 kg)
Height	10.75" (273 mm)
Length	15" (381 mm)
Width	3.5" (89 mm)
Main Body Material	Aluminum

FASTENER SPECIFICATIONS

Capacity	160
Collation	Straight glued and taped strip

O		1"-2"
		7/16"
Series	O-wire 17 ga.	
Length	1"-2"	
Crown	7/16"	

N		1"-2"
		7/16"
Series	N-wire 16 ga.	
Length	1"-2"	
Crown	7/16"	

INCLUDES

- 5 year limited warranty

SOLD SEPARATELY

PARTS KIT

YK0423	Repair kit
--------	------------



16-17 Ga. Heavy Wire Staplers

ITEM #3L0003N

For applications where fast, multi-directional stitching is desired, the SNS41 is your stapler. Ideal for ridge beams and all types of sheathing.

Drives 7/16" crown heavy wire staples from 1" to 2".

APPLICATIONS

- Sheathing, subflooring, crate and box assembly, furring, fascia and soffits and ridge beam assembly

FEATURES AND BENEFITS

- Durable construction minimizes downtime and operation costs
- EZ-Clear™ latch virtually eliminates downtime caused by fastener jams
- Fast, multi-directional stitching

AVAILABLE THROUGH

GRAINGER
FOR THE ONES WHO GET IT DONE

SNS41

16-17 Gauge Heavy Wire Staplers

ITEM #3L0003N



360° Rotatable Exhaust
no tool required, quiet design.

Soft Comfort Grip
reduces vibration fatigue, increases productivity.

Aluminum mainbody
weighs just 4.6 lbs. for ease
of use and maneuverability.

Adjustable Depth-of-Drive
drives staples to a consistent and
controllable depth.

EZ-Clear™ Latch
quick and easy clearing of fastener jams.

Multi-Directional Stitching
up 14 staples per second.



Choose the right actuation mode

Sequential Actuation (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tool to ensure proper use and safety precautions. For additional information on SENCO fastening systems and how SENCO will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: senco.com




A20 PC0781

GRAINGER #48LR20

TOOL SPECIFICATIONS

Op. Pressure	50-125 psi (3.5 - 8.4 bar)
Air Consumption (60 CPM)	2-4 scfm
Air Inlet	3/8" NPT
Weight	2.4 lbs (1.1 kg)
Height	5.8" (122 mm)
Length	4" (101 mm)
Width	3.25" (83 mm)
Housing material	Aluminum

FASTENER SPECIFICATIONS



Capacity	1 nail
Range	2" - 7"
Shank	.113"-.148"
Collation	Loose bulk nails

CAUTION: operation above 125 psi will cause internal damage.

INCLUDES

- 1 year limited warranty
- Leather strap for comfort



2"-7" A20 Bulk Hand Nailer

ITEM# PC0781

APPLICATIONS

- The A20 pneumatic hand nailer is the ideal tool for tight space nailing and fastening metal connectors straps, ties, joist hangers and anchors

FEATURES AND BENEFITS

- Drives most common bulk nails from 2" - 7" (5d to 70d)
- Balanced 2.4 lbs. lightweight die-cast aluminum body
- Soft rubber palm pad for comfortable grip
- Magnetic tip keeps the nail in place and depth control allows for countersink adjustment
- Comes with a leather strap to help reduce fatigue

AVAILABLE THROUGH
GRAINGER
FOR THE ONES WHO GET IT DONE




BC58 **21**_{GA}
GRAINGER #48LR21

TOOL SPECIFICATIONS

Trigger	Contact
Op. Pressure	60-95 psi (4.1 - 6.5 bar)
Air Consumption (60 CPM)	.77 scfm
Air Inlet	1/4" NPT
Weight	4.1 lbs (2 kg)
Height	8.5" (216 mm)
Length	12.5" (317 mm)
Width	3.5" (89 mm)
Main body material	Aluminum



FASTENER SPECIFICATIONS

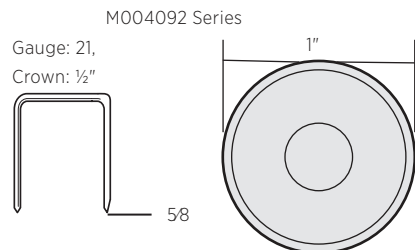

Capacity	110
Range	5/8" staple 1" cap
Crown/Gauge	1/2"/21 ga.
Collation	Glued strip
Series	M004092

1/2" Crown, 5/8" Staple & 1" Cap Stapler

ITEM #4A0001N

Save time and money when installing felt paper and house wrap. The ultra-lightweight, balanced BC56 cap stapler drives 21 gauge 1/2" crown, 5/8" staples with plastic caps in tandem via an easy load system.

APPLICATIONS

- House Wrap & Roofing Felt Installation

FEATURES AND BENEFITS

- EZ-Load system for staples and caps
- Ultra-lightweight for ease of use and maneuverability
- Balanced and fast for high production
- Side mount cap collator - holds caps regardless of tool position

INCLUDES

- 5 year limited warranty
- Case, wrenches, oil, plug

AVAILABLE THROUGH
GRAINGER
FOR THE ONES WHO GET IT DONE

BC58

1/2" Crown, 5/8" Staple & 1" Cap Stapler

ITEM #4A0001N



360° Exhaust
no tool required.

Lightweight
just 4.1 lbs.

Steamlined Casting
protects external parts.

Improved Guidebody
for better performance.


Side Mount Cap Collator
holds caps regardless of tool position.

Stretch Comfort Grip
for comfort and control.

Includes 1/4" Male Coupler
with cover to keep tool clean.

EZ-Load System
for caps and staples

Belt Hook
lets the tool go where you go.

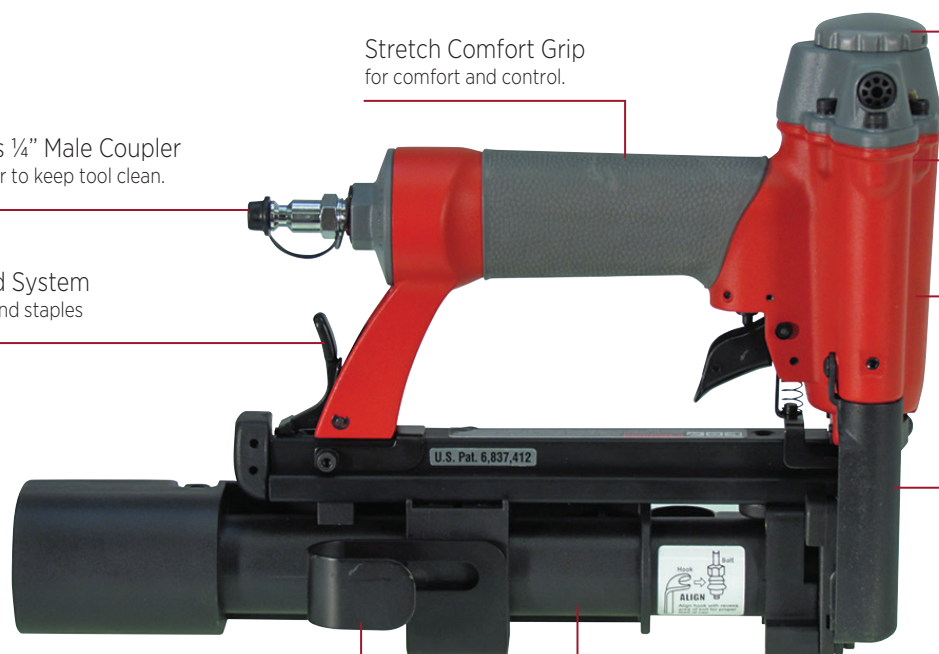

Choose the right actuation mode

Sequential Actuation (also known as restrictive trigger or trigger fire) operates in the following a sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tool to ensure proper use and safety precautions. For additional information on SENCO fastening systems and how SENCO will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: senco.com




FramePro® 325FRXP

20°


GRAINGER #35JG54

TOOL SPECIFICATIONS

Trigger	Selectable
Op. Pressure	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 CPM)	5.2 scfm
Air Inlet	3/8" NPT
Weight	7.9 lbs (3.58 kg)
Height	11.9" (302 mm)
Length	17.3" (440 mm)
Width	4.5" (114 mm)
Main Body Material	Aluminum

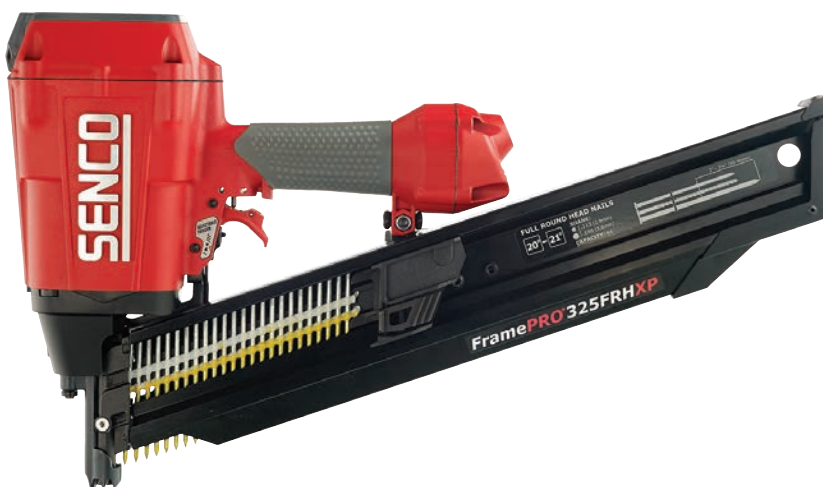

FASTENER SPECIFICATIONS

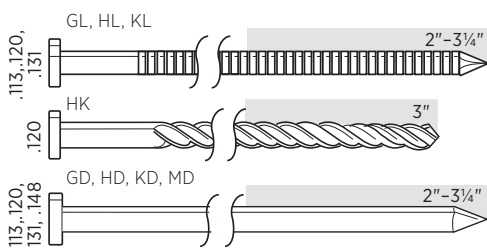

Capacity	64
Length	2" or 3 1/4"
Shank	.113" - .148"
Collation	20° angled plastic collated strip
Series	GD, GL, HD, HL, HK, KD, MD

INCLUDES

- 5 year limited warranty
- No-mar pad

SOLD SEPARATELY

PARTS KIT

YK0444	Firing system kit
YK0768	Piston stop kit

3 1/4" Full Round Head Nailer

ITEM #4H0101N

Specifically engineered for demanding professionals and sized to fit between studs. The award-winning FramePro® 325FRXP is lightweight, well balanced, easy to use, powerful, efficient and safe. Drives ring, screw and smooth-shank full round head 20° degree plastic collated strip nails (2" to 3 1/4") into the most demanding substrates.

APPLICATIONS

- Framing, truss building, subflooring, sheathing, decking, siding, fencing, pallets and crate assembly

FEATURES AND BENEFITS

- Patented TrueDrive™ magazine reduces jams and misfeeds
- Effective internal design means less wear and tear on the compressor
- Claw-like toenail safety
- Fits easily between studs and joists
- Adjustable depth-of-drive allows for precise countersink

AVAILABLE THROUGH
GRAINGER
FOR THE ONES WHO GET IT DONE

FramePro® 325FRXP

3¼" Full Round Head Nailer

ITEM #4H0101N



Ergonomic Design
easily fits between studs and joists,
superb balance for use all day.

Selectable Trigger
contact or sequential trigger actuation
switch – patented drive selector.

Uses Less Air
highly efficient internal design,
runs great with ¼" line fittings.

Aluminum Housing
lightweight, superior durability.

Adjustable Depth-of-Drive
drives nails to a consistent and
controllable depth.

Last Nail Lockout
prevents dry firing and signals
when ready to reload.

Aggressive Claw-Like Toenail Safety
that really digs in for toenailing.

Comfort Grip
reduces fatigue and
increases productivity.

Two-Step Rear Loading
quick and easy for right or
left handed operators.

Rafter Hanger
retractable.

Straight-Line Magazine
for better line of sight.

Patented TrueDrive™ Magazine
reduced jams and mis-feeds.

No-Mar Pad
protects work surface.

Choose the right actuation mode

Sequential Actuation (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tool to ensure proper use and safety precautions. For additional information on SENCO fastening systems and how SENCO will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: senco.com



FramePro® 325XP


34°

GRAINGER #48LR49

TOOL SPECIFICATIONS

Trigger	Selectable
Op. Pressure	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 CPM)	5.2 scfm
Air Inlet	3/8" NPT
Weight	7.9 lbs (3.58 kg)
Height	11.9" (302 mm)
Length	17.3" (440 mm)
Width	4.5" (114 mm)
Main Body Material	Aluminum

FASTENER SPECIFICATIONS

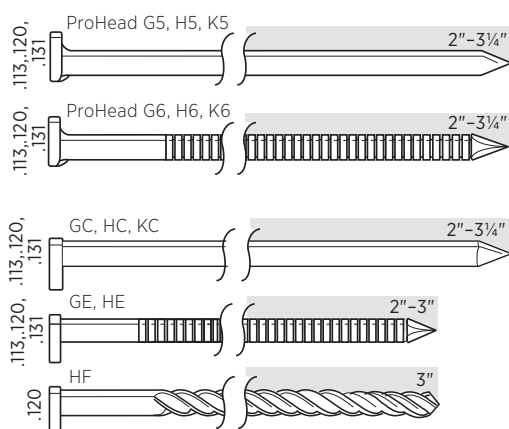

Capacity	83
Length	2" or 3 1/4"
Shank	.113" - .148"
Collation	34° angled paper tape strip
Series	ProHead G5, G6, H5, H6, K5, K6 Clipped Head GC, GE, HC, HE, HF, KC

INCLUDES

- 5 year limited warranty
- No-mar pad

SOLD SEPARATELY

PARTS KIT

YK0444	Firing system kit
YK0445	Piston stop kit



3/4" Paper Tape Framing Nailer

ITEM #4ZO101N

Specifically engineered for demanding professionals and sized to fit between studs. The award-winning FramePro® 325XP is lightweight, well-balanced, easy-to-use, powerful, efficient and safe. Drives ring, screw and smooth-shank 34-degree paper-taped strip nails (2" to 3 1/4") with minimal jams and fatigue.

APPLICATIONS

- Framing, truss building, subflooring, sheathing, decking, siding, fencing, pallets and crate assembly

FEATURES AND BENEFITS

- Patented TruDrive™ magazine reduces jams and misfeeds
- Effective internal design means less wear and tear on the compressor
- Claw-like toenail safety
- Fits easily between studs and joists
- Adjustable depth-of-drive allows for precise countersink

AVAILABLE THROUGH

GRAINGER
FOR THE ONES WHO GET IT DONE

FramePro® 325XP

3¼" 34° Paper Tape Framing Nailer

ITEM #4Z0101N



Ergonomic Design
easily fits between studs and joists,
superb balance for use all day.

Selectable Trigger
contact or sequential trigger actuation
switch – patented drive selector.

**Patented
TrueDrive™ Magazine**
reduced jams and mis-feeds.

Uses Less Air
highly efficient internal design
runs great with ¼" line fittings.

Aluminum Housing
lightweight, superior durability.

Adjustable Depth-of-Drive
drives nails to a consistent and
controllable depth.

Last Nail Lockout
prevents dry firing and signals
when ready to reload.

Aggressive Claw-Like Toenail Safety
that really digs in for toenailing.

Comfort Grip
reduces fatigue and
increases productivity.

Rear Two-Step Loading
Quick and easy for right or left
handed operators.

Rafter Hanger
retractable.

Straight-Line Magazine
for better line of sight.

No-Mar Pad
protects work surface.



Choose the right actuation mode

Sequential Actuation (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tool to ensure proper use and safety precautions. For additional information on SENCO fastening systems and how SENCO will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: senco.com



JN91P1 **METAL CONNECTOR**

GRAINGER #822C73



SPECIFICATIONS

Trigger	Sequential
Op. Pressure	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 CPM)	6.4 scfm
Air Inlet	¼" NPT
Weight	7.53 lbs (3.41 kg)
Height	14.38" (365 mm)
Length	14" (355 mm)
Width	5.25" (133 mm)
Main Body Material	Magnesium
Warranty	5 Years

FASTENERS

Capacity	35
Length	1½"-2½"
Shank	.131"-.162"
Collation	34° Paper Tape Heat Treated Strip
Series	KJ, MD, ND

INCLUDES

Wrenches
Tool Oil
Safety Glasses
Air Plug

2½" METAL CONNECTOR NAILER

The JN91P1 delivers the power to drive 1½" to 2½" nails into the toughest substrates, including engineered lumber. This small and compact metal connector nailer fits easily between rafters and joists and the nosepiece design leads with a metal point for accurate nail placement into pre-punched holes.

TOOL OVERVIEW

- Best-in-class power, designed to consistently drive through engineered lumber
- Single strip, allows for increased maneuverability in tight spaces
- Innovative nosepiece design
- Tool-free depth of drive
- Dry fire lockout
- Rugged, rotatable rafter hook

APPLICATIONS

Joist hangers, anchors, straps, metal framing

34°



AVAILABLE THROUGH
GRAINGER
FOR THE ONES WHO GET IT DONE

5 YEAR
LIMITED
WARRANTY

2 1/2" METAL CONNECTOR NAILER



JN91P1

METAL CONNECTOR

1

LIGHTWEIGHT AND WELL-BALANCED

Compact design, maneuverable in hard to reach areas

2

POWERFUL

Drives through structural hardware into engineered lumber, like LVL or OSB

3

NOSEPIECE DESIGN

Provides accurate nail placement into metal connector holes

4

TOOL-FREE DEPTH OF DRIVE

Quickly and easily set drive depth

5

DRY FIRE LOCKOUT

Reduces tool wear and indicates the need to reload fasteners

6

RUGGED RAFTER HOOK

Rotatable, aluminum design keeps tool secure when not in use

7

OVERMOLD GRIP

Increases control of the tool

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. For additional information on SENCO fastening systems and how SENCO will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: www.Senco.com.



PalletPro™57FXP

15°

GRAINGER #48LP96

TOOL SPECIFICATIONS

Trigger	Contact
Op. Pressure	70-120 psi (4.9 - 8.4 bar)
Air Consumption (60 CPM)	3.07 scfm
Air Inlet	3/8" NPT
Weight	5.9 lbs (2.67 kg)
Height	11.25" (286 mm)
Length	11.88" (302 mm)
Width	5.25" (123 mm)
Main body material	Aluminum

FASTENER SPECIFICATIONS



Capacity	300-350
Range	1" - 2 1/4" (25mm - 57mm)
Shank/Gauge	.082"-.092"
Collation	15° flat wire wound coil
Series	BK, ED, EJ, EL, SE

INCLUDES

- 5 year limited warranty
- Wrenches, tool oil

SOLD SEPARATELY

PARTS KIT

YK0446	Repair kit
--------	------------



2 1/4" Heavy-Duty Coil Nailer

ITEM #4L0001N

Has the ability to drive up to 2 1/4" nails into hardwood reliably and consistently. The PalletPro57FXP coil nailer is built for high speed, high volume operations with a fastener capacity of 300 to 350. Features include a high durability driver and piston bumper and body protection.

APPLICATIONS

- Boxes, carton-to-skid, crates and pallets

FEATURES AND BENEFITS

- High capacity composite magazine - fast and easy loading
- Ultra-durability driver and piston bumper designed for long life
- Adjustable nail canister accommodates wide range of nails
- Reversed safety element for improved line of sight
- Body protection - side steel wearplates reduce abrasion of tool

AVAILABLE THROUGH
GRAINGER
FOR THE ONES WHO GET IT DONE

PalletPro™ 57FXP

2¼" Heavy-Duty Coil Nailer

ITEM #4L0001N



360° Adjustable Exhaust
no tool required.

Body Protection
side steel wearplates reduce abrasion of tool

Aluminum Mainbody
weighs 5.9 lbs.

Rugged Driver & Piston Bumper
for improved performance and durability.

Tool-Free Depth-of-Drive
adjustment delivers perfectly
countersunk fasteners into a variety of
materials.

Comfort Grip
for comfortable all-day operation.

High Capacity
Composite Magazine
fast and easy loading

NOTE:
Only accepts flat wire wound nails

Debris Shield
protects user and work surface.



Choose the right actuation mode

Sequential Actuation (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tool to ensure proper use and safety precautions. For additional information on SENCO fastening systems and how SENCO will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: senco.com



PS15XP
GRAINGER #494M29


16_{GA}

TOOL SPECIFICATIONS

Trigger	Contact
Op. Pressure	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 CPM)	3.18 scfm
Air Inlet	3/8" NPT
Weight	5.5 lbs (2.5 kg)
Height	9" (229 mm)
Length	15.25" (387 mm)
Width	4" (105 mm)
Main Body Material	Aluminum



FASTENER SPECIFICATIONS



Capacity	160
Length	5/8" - 1 1/2"
Gauge	16
Crown	1"
Collation	Taped and taped glued
Series	P-wire

INCLUDES

- 5 year limited warranty

SOLD SEPARATELY

PARTS KITS

YK0784, YK0818	Repair kits
YK0883	Block out kit
YJ0044	Retrofit kit-solid safety

1" Wide Crown, 1 1/2" Heavy Wire Stapler

ITEM #9T0001N

Constructed of durable, high strength components, the PS15XP has been developed for extreme performance and longevity. The NEW drive track design allows for superior control of the fastener and unrivaled driveability. Drives 1" crown 16 ga. staples from 5/8" to 1 1/2".

APPLICATIONS

- Wire lathing, foam insulation board, furniture, cabinet frames, butt-joints and corrugated carton to skid

FEATURES AND BENEFITS

- Enhanced EZ-Clear™ latch allows for quick access to clear fasteners and a NEW aggressive locking feature provides superior holding power for complete control of the fastener, offering pinpoint accuracy and unrivaled driveability
- NEW Drive track design eliminates movement of the staple, enhancing overall drive performance and virtually eliminating fastener jams, skipping and misfires
- Robust firing valve design makes the tool fast, powerful, efficient, and easy to maintain
- Positive-locking adjustable depth-of-drive ensures consistently flush drives and helps prevent overdrives

AVAILABLE THROUGH
GRAINGER
FOR THE ONES WHO GET IT DONE

PS15XP

1" Wide Crown 1½" Heavy Wire Stapler

ITEM #9T0001N



Choose the right actuation mode

Sequential Actuation (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tool to ensure proper use and safety precautions. For additional information on SENCO fastening systems and how SENCO will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: senco.com




SCN65XP **15°**
GRAINGER #48LR11

TOOL SPECIFICATIONS

Trigger	Contact actuation
Op. Pressure	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 CPM)	9.54 scfm
Air Inlet	3/8" NPT
Weight	8 lbs (3.6 kgs)
Height	14.1" (359 mm)
Length	12.88" (327 mm)
Width	5.38" (137 mm)
Main Body Material	Aluminum

FASTENER SPECIFICATIONS

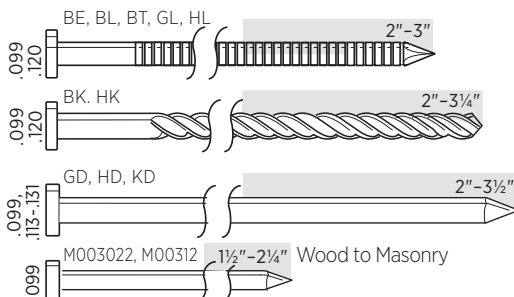

Capacity	225 - 275
Length	2" - 3 1/2"
Shank	.099" - .131"
Collation	15° flat wire welded coil
Series	BK, BL, BT, GD, GL, HD, HK, HL, KD, M00

INCLUDES

- 5 year limited warranty

SOLD SEPARATELY

PARTS KIT

YK0366	Repair kit
--------	------------



3 1/2" Rugged-Duty Coil Nailer

ITEM (flat safety): #540101N

(toenail safety): #540104

The powerful and rugged SCN65XP coil nailer drives up to a 3 1/2" nail, while still being light enough for a one-handed operation. It can hold up to 275 nails for maximum productivity in a wide variety of applications.

APPLICATIONS

- For on-site manufactured housing, including sheathing, decking, subflooring, and exterior decks. Also, industrial markets such as heavy-duty pallet construction, pallet repair, crate and box assembly

FEATURES AND BENEFITS

- Highest power-to-weight ratio in its class
- High load capacity (up to 275 nails)
- E-Z load design saves time
- Fast cycle time increases productivity
- Adjustable depth-of-drive allows for precise countersink

AVAILABLE THROUGH
GRAINGER
FOR THE ONES WHO GET IT DONE

SCN65XP

3½" Rugged-Duty Coil Nailer

ITEM (flat safety): #540101N
(toenail safety): #540104



360° Adjustable Exhaust
quiet design.

Highest Power-To-Weight
Ratio In Its Class
light enough for one-handed operation.

Tool-Free Adjustable Depth-of-Drive
allows user to achieve precise fastener
placement.

Debris Shield
protects work piece & operator.

Comfort Grip
reduces fatigue
increases productivity.

High Load Capacity
up to 275 nails.

EZ-Load Design
open magazine door, lets you
easily see when to reload.



Choose the right actuation mode

Sequential Actuation (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tool to ensure proper use and safety precautions. For additional information on SENCO fastening systems and how SENCO will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: senco.com



SCP40XP

GRAINGER #820CA5


TOOL SPECIFICATIONS

Trigger	Selectable actuation
Op. Pressure	80-120 psi (5.5 - 8.3 bar)
Air Consumption (60 CPM)	5.2 scfm
Air Inlet	3/8" NPT
Weight	7.1 lbs (3.2 kg)
Height	12.22" (310 mm)
Length	18.2" (462 mm)
Width	4.5" (114.4 mm)
Main Body Material	Aluminum



FASTENER SPECIFICATIONS

W3 Series



Capacity	42
Range	1/2" - 1 1/2" (12mm - 37mm)
Shank	.109" / .118"
Collation	Straight plastic collated strip
Series	W3

INCLUDES

- 5 year limited warranty

SOLD SEPARATELY

NPC035	Magnetic washer nosepiece
SWM125B	Galvanized metal washer

PARTS KIT

YK0444	Firing system kit
YK0445	Piston stop kit

1 1/2" Pneumatic Concrete & Steel Pinner

ITEM #7J0001N

The SCP40XP drives with the power and durability of a high pressure nailer but at a fraction of the cost of a high pressure system. The standard pressure system is easy to use while being much faster and less costly than gas or powder-actuated alternatives. The SCP40XP features a durable aluminum housing, highly efficient motor design, patented drive selector, narrow nosepiece, and quick and easy two-step fastener loading.

APPLICATIONS

- Fastening of drywall track, wood furring, hat channel, ceiling grid to concrete, concrete block and steel

FEATURES AND BENEFITS

- Does not require costly high pressure compressor system - works with conventional air compressors, hoses, and fittings
- 10 times faster than powder actuated systems
- No licensing required to operate
- Operates in extreme temperatures and altitudes
- Operates in contact or sequential

AVAILABLE THROUGH
GRAINGER
FOR THE ONES WHO GET IT DONE

SCP40XP

1½" Pneumatic Concrete & Steel Pinner

ITEM# 7J0001N



Cap Exhaust
directs exhaust downward.

Powerful and Fast
up to 10 times faster than powder
actuated systems.

Aluminum Housing
lightweight, superior durability.

Hardened Driver Blade
for longer life.

Narrow Nose
shoots hat-channel.

Full Comfort Grip
resilient grip reduces vibration fatigue.

Standard Air Pressure Pneumatic System
does not require costly high pressure compressor system.


Patented Drive Selector
contact or sequential trigger activation.

Rear Two-Step Loading
quick and easy for right
or left handers.



Optional Magnetic Washer Nosepiece
holds metal washers.

SOLD SEPARATELY
Magnetic Washer Nosepiece
Item #NPC035
Fastening attachment for
plaster, stucco and
building wrap applications.



Galvanized Metal Washer

ITEM #	Diameter	Box Count	Fits SCP40XP
SWM125B	1¼"	1M	.109" Dia. Concrete Pins

Choose the right actuation mode

Sequential Actuation (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tool to ensure proper use and safety precautions. For additional information on SENCO fastening systems and how SENCO will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: senco.com



NS20XP

17_{GA}


16_{GA}

TOOL SPECIFICATIONS


Trigger	Contact
Op. Pressure	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 CPM)	3.5 scfm
Air Inlet	3/8" NPT
Weight	5.1 lbs. (2.3 kg)
Height	11" (279 mm)
Length	15" (381 mm)
Width	3.5" (89 mm)
Main Body Material	Aluminum

FASTENER SPECIFICATIONS

Capacity	160
Collation	Straight glued and taped strip



Series	O-wire 17 ga.
Length	1" - 2"
Crown	7/16"



Series	N-wire 16 ga.
Length	1" - 2"
Crown	7/16"

INCLUDES

- 5 year limited warranty

SOLD SEPARATELY

PARTS KIT

YK0840	Firing system kit
YK0841	Piston stop kit
HC0788	Siding safety kit



16-17 Ga. Heavy Wire Staplers

ITEM #9X0001N

Setting the new standard for class leading power and tool durability, the NS20XP is the industry benchmark for construction staplers.

The new drive track design allows for superior control of the fastener, providing unrivaled drivability. The NS20XP drives both 16 and 17 gauge, 7/16" crown staples (1" to 2" in length).

APPLICATIONS

- Sheathing, furniture framing, roof decking, subflooring, crate and box assembly, pallets, cedar shingles, furring, fascia and soffits and ridge beam assembly

FEATURES AND BENEFITS

- 15% more powerful than all other construction staplers in its class
- Enhanced EZ-Clear™ latch allows for quick access to clear fasteners and a NEW aggressive locking feature provides superior holding power for complete control of the fastener, offering pinpoint accuracy and unrivaled driveability.
- New drive track design eliminates movement of the staple, enhancing overall drive performance and virtually eliminating fastener jams, skipping and misfires.
- Rotatable belt hook
- Convert your NS20XP into a vinyl siding stapler

NS20XP

16-17 Gauge Heavy Wire Staplers

ITEM #9X0001N



15% More Powerful
than all other construction
staplers in its class.

Soft Over-molded Palm Grip
reduces fatigue, increases productivity.

Aluminum Mainbody
weighs just 5.1 lbs. for ease
of use and maneuverability.

Rotatable Belt Hook

Well Balanced
ergonomic design for all-day use.

Formed steel latch
ensures accurate, jam-free
staple drives into all substrates.

Multi-Directional Stitching
up to 14 staples per second.

Steel Staple Door
provides enhanced durability and
improved drive.



Vinyl Siding Attachment (Sold Separately)

Convert NS20XP into vinyl siding stapler.
Order Item #HC0788

Choose the right actuation mode

Sequential Actuation (also known as restrictive trigger or trigger fire) operates in the following a sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tool to ensure proper use and safety precautions. For additional information on Senco fastening systems and how Senco will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: senco.com



FN91T1 **FRAMING NAILER**

SPECIFICATIONS

Trigger	Sequential
Op. Pressure	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 CPM)	6.7 scfm
Air Inlet	3/8" NPT
Weight	8.39 lbs (3.8 kgs)
Height	14.13" (358 mm)
Length	17.25" (438 mm)
Width	4.88" (123 mm)
Main Body Material	Aluminum
Warranty	5 Years

FASTENERS

Capacity	80
Length	2" or 3 1/2"
Shank	.113" - .135"
Collation	34° Angled Tape Strip
Series	ProHead G5, H5, K5, G6, H6, K6, Clipped Head GC, GE, HC, HE, HF, KC, LC

INCLUDES

No-Mar Pad
Air Plug
Belt Hook



3 1/2" PAPER TAPE FRAMING NAILER

The FN91T1 delivers the power and durability demanded by professional contractors for all-day performance on the toughest jobsites. It drives a wide range of paper tape collated nails from .113" to .135" in diameter, and 2"-3 1/2" in length. Upgraded features include, an ergonomic design, an in-line magazine for clear line of sight and a tool-free depth of drive for quick adjustments.

TOOL OVERVIEW

- Best in class tool power & durability
- Well-balanced ergonomic design
- In-line magazine for optimal line of sight
- Aggressive toenail safety
- Tool-free depth of drive
- Engineered and Assembled in Cincinnati, Ohio

APPLICATIONS

Framing, truss building, subflooring, sheathing, decking, siding, fencing, pallets and crate assembly



PNEUMATIC FRAMER VIDEO
Tool in use



PNEUMATIC FRAMER VIDEO
Product overview

30°

34°



5 YEAR
LIMITED
WARRANTY

3 1/2" PAPER TAPE FRAMING NAILER



FN91T1
FRAMING NAILER

- | | | |
|--|--|--|
| 1 ERGONOMIC DESIGN
Superb balance for all-day use | 4 AGGRESSIVE TOENAIL SAFETY
Provides extra grip for toenail applications, no-mar tip included | 7 RUGGED RAFTER HOOK
Rotatable, aluminum design keeps the tool secure when not in use |
| 2 POWERFUL
Consistently drives a full range of nails | 5 TOOL-FREE DEPTH OF DRIVE
Quickly and easily set the drive depth | 8 DRY FIRE LOCKOUT
Reduces tool wear and indicates the need to reload fasteners |
| 3 IN-LINE MAGAZINE
Provides clear line of sight for right and left handed operators, improves balance and reduces fatigue | 6 OVERMOLD GRIP
Increases control of the tool, accelerating productivity | 9 REAR TWO-STEP LOADING
Allows for rapid reloads for both right and left handed operators |

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. For additional information on SENCO fastening systems and how SENCO will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: www.senco.com.



JN91H1 **METAL CONNECTOR**

SPECIFICATIONS

Trigger	Sequential
Op. Pressure	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 CPM)	4.4 scfm
Air Inlet	1/4" NPT
Weight	5.48 lbs (2.48 kg)
Height	12.5" (317 mm)
Length	11.13" (282 mm)
Width	4.38" (111 mm)
Main Body Material	Magnesium
Warranty	5 Years

FASTENERS

Capacity	30
Length	1 1/2"
Shank	.131"-.148"
Collation	34° Paper Tape Heat Treated Strip
Series	KJ, MD

INCLUDES

Wrenches
Tool Oil
Safety Glasses
Air Plug



1 1/2" METAL CONNECTOR NAILER

The JN91H1 is specifically designed for fastening pre-punched metal connection hardware to dense engineered lumber, like LVL. This small, compact metal connector nailer fits easily between rafters and joists, driving 1 1/2" nails through joist hangers, seismic and hurricane ties, and rafter straps. The innovative nosepiece design leads with the point of the nail, ensuring precise placement on each drive.

TOOL OVERVIEW

- Best-in-class power, designed to consistently drive through engineered lumber
- Single strip, allows for increased maneuverability in tight spaces
- Innovative nosepiece design
- Dry fire lockout
- Rugged, rotatable belt hook
- Overmold grip increases control of the tool

APPLICATIONS

Joist hangers, anchors, straps, metal framing

34°



5 YEAR
LIMITED
WARRANTY

1 1/2" METAL CONNECTOR NAILER



JN91H1

METAL CONNECTOR

- 1 LIGHTWEIGHT AND WELL-BALANCED**
Compact design, maneuverable in hard to reach areas
- 2 POWERFUL**
Drives through structural hardware into engineered lumber, like LVL or OSB
- 3 NOSEPIECE DESIGN**
Provides accurate nail placement into metal connector holes
- 4 DRY FIRE LOCKOUT**
Reduces tool wear and indicates the need to reload fasteners
- 5 RUGGED RAFTER HOOK**
Rotatable, aluminum design keeps tool secure when not in use
- 6 OVERMOLD GRIP**
Increases control of the tool

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. For additional information on SENCO fastening systems and how SENCO will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: www.Senco.com.



FN81T1 **FRAMING NAILER**

SPECIFICATIONS


Trigger	Sequential
Op. Pressure	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 CPM)	6.7 scfm
Air Inlet	3/8" NPT
Weight	8.75 lbs (3.9 kgs)
Height	14.13" (358 mm)
Length	20.75" (527 mm)
Width	4.88" (123 mm)
Main Body Material	Aluminum
Warranty	5 Years

FASTENERS

Capacity	63
Length	2" or 3 1/2"
Shank	.113" - .148"
Collation	20° Angled Tape Strip
Series	GD, HD, KD, MD, GL, HL

INCLUDES

No-Mar Pad
Air Plug
Belt Hook

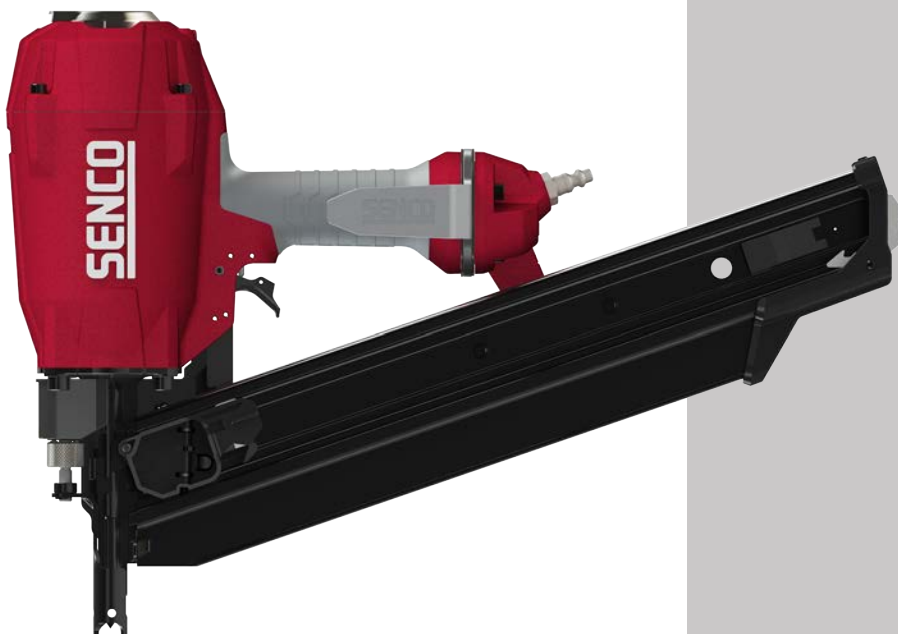

3 1/2" FULL ROUND HEAD FRAMING NAILER

The FN81T1 delivers the power and durability demanded by professional contractors for all-day performance on the toughest jobsites. It drives a wide range of plastic collated nails from .113" to .148" in diameter, and 2"-3 1/2" in length. Upgraded features include, an ergonomic design, an in-line magazine for clear line of sight and a tool-free depth of drive for quick adjustments.

TOOL OVERVIEW

- Best in class tool power & durability
- Well-balanced ergonomic design
- In-line magazine for optimal line of sight
- Aggressive toenail safety
- Tool-free depth of drive
- Engineered and Assembled in Cincinnati, Ohio

APPLICATIONS

Framing, truss building, sub flooring, sheathing, decking, siding, fencing, pallets and crate assembly



PNEUMATIC FRAMER VIDEO
Tool in use



PNEUMATIC FRAMER VIDEO
Product overview

20°


21°

22°



5 YEAR
LIMITED
WARRANTY

3 1/2" FULL ROUND HEAD FRAMING NAILER

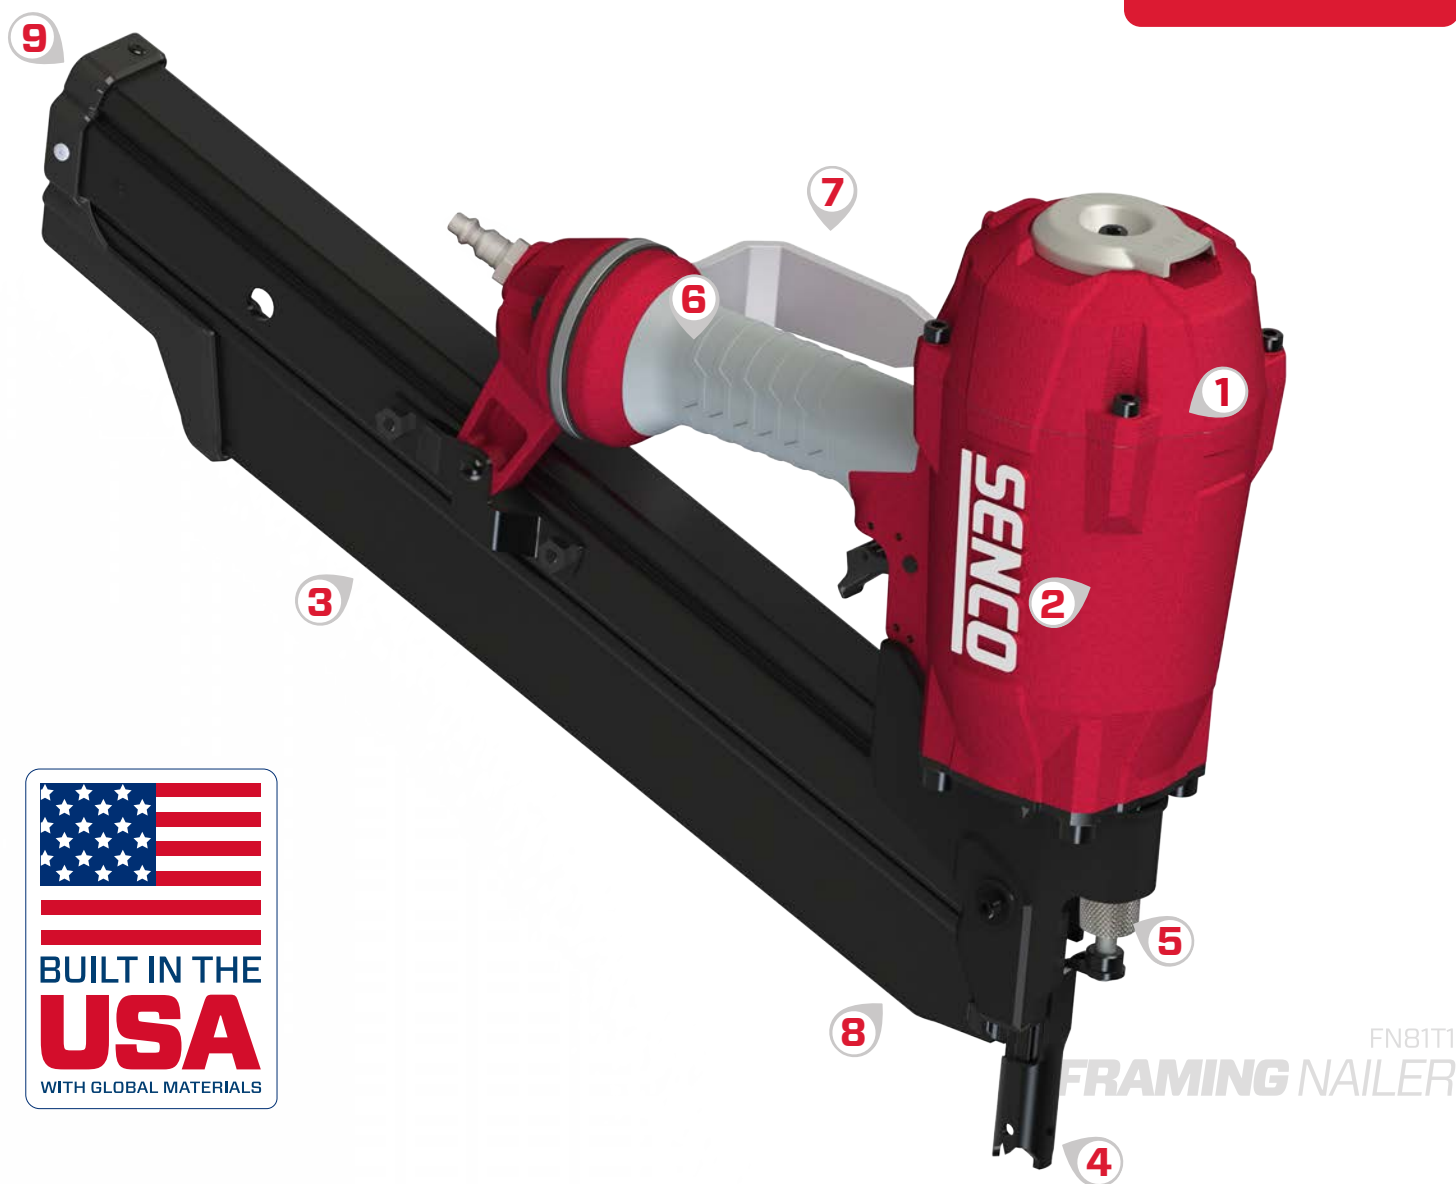

FN81T1
FRAMING NAILER

- | | | |
|---|---|---|
| 1 ERGONOMIC DESIGN
Superb balance for all-day use | 4 AGGRESSIVE TOENAIL SAFETY
Provides extra grip for toenail applications, no-mar tip included | 7 RUGGED RAFTER HOOK
Rotatable, aluminum design keeps the tool secure when not in use |
| 2 POWERFUL
Consistently drives a full range of nails | 5 TOOL-FREE DEPTH OF DRIVE
Quickly and easily set the drive depth | 8 DRY FIRE LOCKOUT
Reduces tool wear and indicates the need to reload fasteners |
| 3 IN-LINE MAGAZINE
Provides clear line of sight for right and left handed operators, improves balance and reduces fatigue | 6 OVERMOLD GRIP
Increases control of the tool, accelerating productivity | 9 REAR TWO-STEP LOADING
Allows for rapid reloads for both right and left handed operators |

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. For additional information on SENCO fastening systems and how SENCO will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: www.Senco.com.