




FlexStat



FlexStat 80



GS

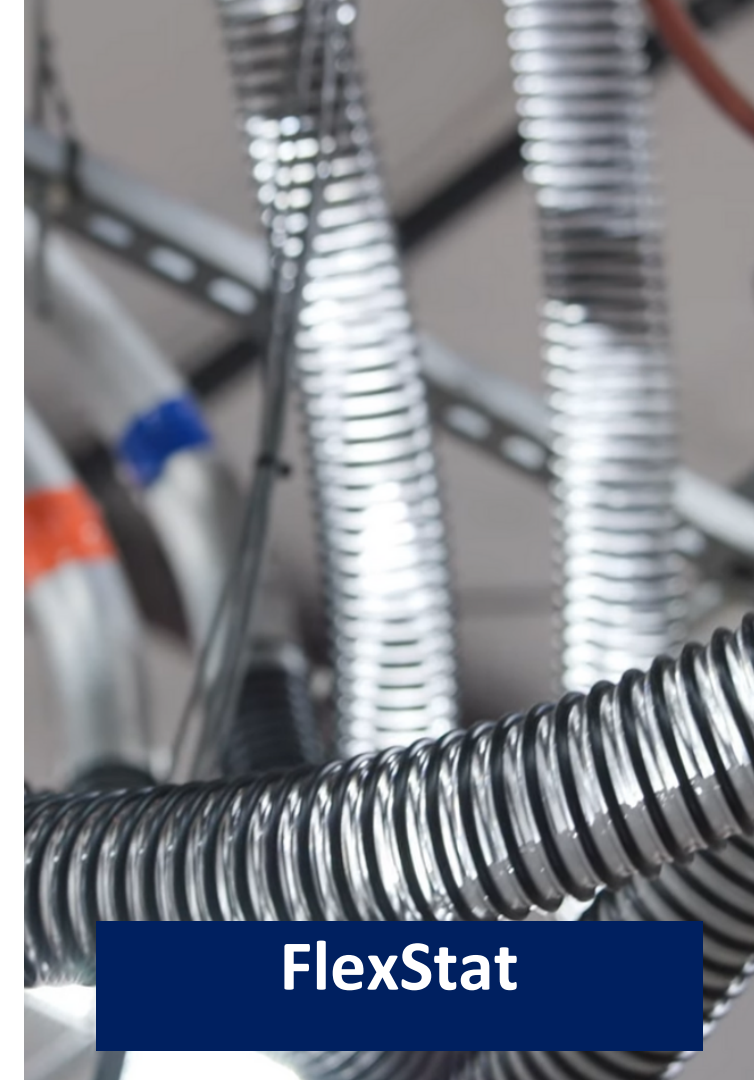

FlexStat

Plastic Extrusion

FlexStat® (Pellet Transfer) Features:

- Static dissipative properties prevent dangerous static buildup.
- Durable polyurethane construction ensures longer service life than PVC.
- Lightweight and flexible for easy installation in tight spaces.
- Smooth interior promotes steady pellet flow and reduces clogs.

GS Series (Resin Heating & Drying) Features:


- High-temperature resistance for hot air circulation without degradation.
- Excellent flexibility for routing around equipment.
- Moisture and chemical resistance for demanding environments.
- Durable construction withstands continuous heating and drying cycles.



R-2



T-7

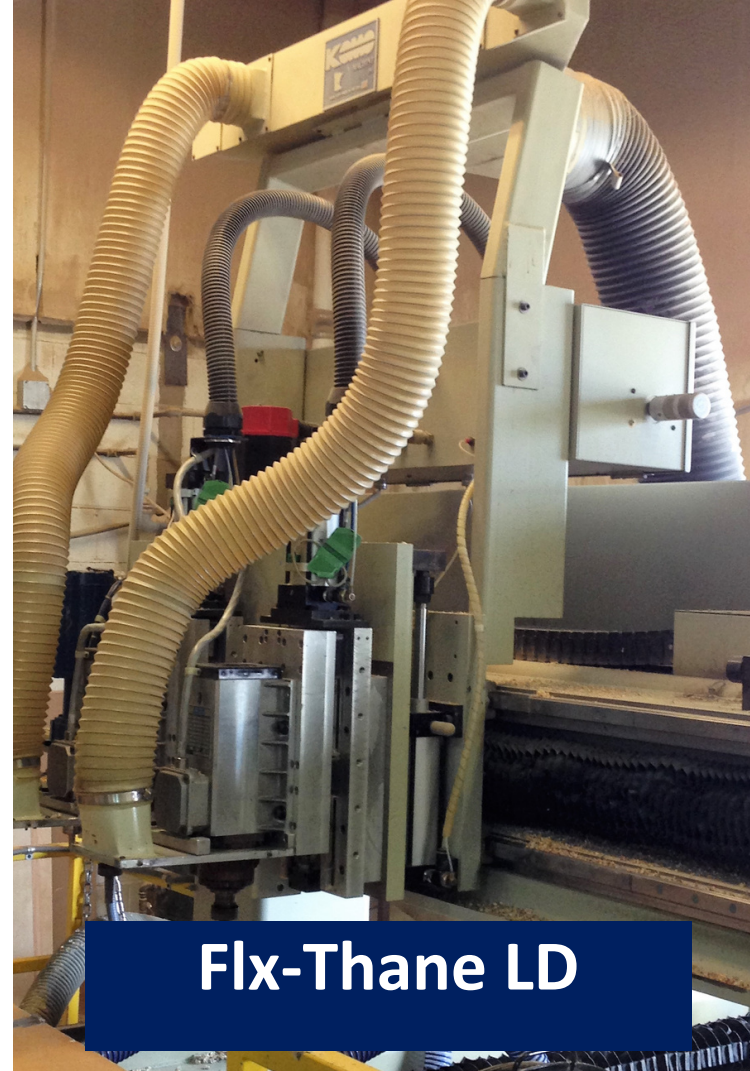

Flx-Thane LD



MRO General Pick Up

FLEXAUST®

MRO General Service

- Fume extraction, dust collection, woodworking, concrete & sand dust, grain vacuum, bulk material handling, static build-up, severe service, duct cleaning

Good

- Flexadux® PV (R-2, R-3, R-4)

Better

- Flexadux® T-7

Best

- Flx-Thane® LD, MD, HD



Flx-Thane SD



Flx-Thane LD-SD



Flx-Thane HD



R-4

Dust Control

- Fume extraction, dust collection, woodworking, concrete & sand dust, grain vacuum, bulk material handling, static build-up, severe service, duct cleaning

Good

- Flexadux® PV (R-4)

Better

- Flexadux® T-7

Best

- Flx-Thane® LD, MD, HD



Dust Control Applications






Commerical



Stat Path



FlexTube PU 60 HF

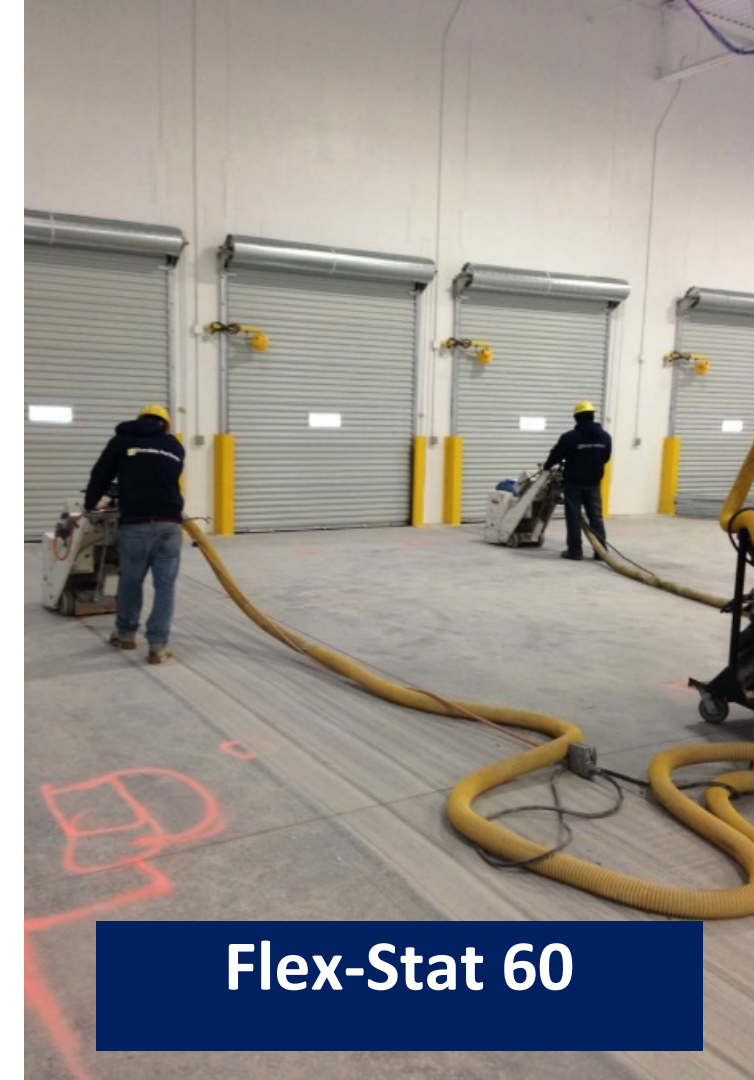

Flex-Stat 60

Surface Prep & Vacuum Hoses

- Commercial and industrial vacuum hose applications
- Cuffs and connectors available for hoses for complete assembly
- Crush resistant hoses & Superior abrasion resistance
- Smooth interiors allow for very efficient air flow



Blown Film



Canning Operation

FlexTube PU