




FramePro® 325XP

34°

TOOL SPECIFICATIONS

Trigger	Selectable
Op. Pressure	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 CPM)	5.2 scfm
Air Inlet	3/8" NPT
Weight	7.9 lbs (3.58 kg)
Height	11.9" (302 mm)
Length	17.3" (440 mm)
Width	4.5" (114 mm)
Main Body Material	Aluminum

FASTENER SPECIFICATIONS

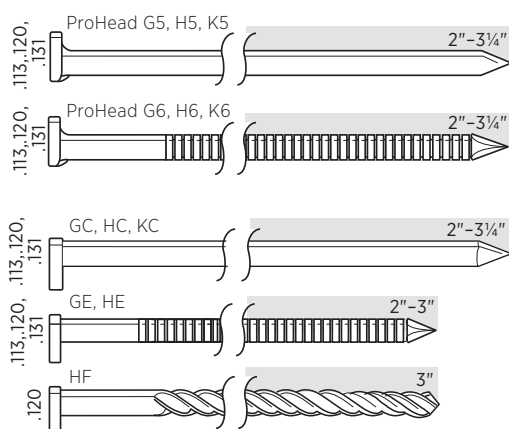

Capacity	83
Length	2" or 3 1/4"
Shank	.113" - .148"
Collation	34° angled paper tape strip
Series	ProHead G5, G6, H5, H6, K5, K6 Clipped Head GC, GE, HC, HE, HF, KC

INCLUDES

- 5 year limited warranty
- No-mar pad

SOLD SEPARATELY

PARTS KIT

YK0444	Firing system kit
YK0445	Piston stop kit



3/4" Paper Tape Framing Nailer

ITEM #4ZO101N

Specifically engineered for demanding professionals and sized to fit between studs. The award-winning FramePro® 325XP is lightweight, well-balanced, easy-to-use, powerful, efficient and safe. Drives ring, screw and smooth-shank 34-degree paper-taped strip nails (2" to 3 1/4") with minimal jams and fatigue.

APPLICATIONS

- Framing, truss building, subflooring, sheathing, decking, siding, fencing, pallets and crate assembly

FEATURES AND BENEFITS

- Patented TruDrive™ magazine reduces jams and misfeeds
- Effective internal design means less wear and tear on the compressor
- Claw-like toenail safety
- Fits easily between studs and joists
- Adjustable depth-of-drive allows for precise countersink

FramePro® 325XP

3¼" 34° Paper Tape Framing Nailer

ITEM #4Z0101N



Ergonomic Design
easily fits between studs and joists,
superb balance for use all day.

Selectable Trigger
contact or sequential trigger actuation
switch – patented drive selector.

**Patented
TrueDrive™ Magazine**
reduced jams and mis-feeds.

Uses Less Air
highly efficient internal design
runs great with ¼" line fittings.

Aluminum Housing
lightweight, superior durability.

Adjustable Depth-of-Drive
drives nails to a consistent and
controllable depth.

Last Nail Lockout
prevents dry firing and signals
when ready to reload.

Aggressive Claw-Like Toenail Safety
that really digs in for toenailing.

Comfort Grip
reduces fatigue and
increases productivity.

Rear Two-Step Loading
Quick and easy for right or left
handed operators.

Rafter Hanger
retractable.

Straight-Line Magazine
for better line of sight.

No-Mar Pad
protects work surface.



Choose the right actuation mode

Sequential Actuation (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tool to ensure proper use and safety precautions. For additional information on SENCO fastening systems and how SENCO will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: senco.com