

GRAINGER®

FOR THE ONES WHO GET IT DONE

QUICKFITTING®



- Established in 2007 with a focus on innovation of connection technologies
- QuickFitting holds a portfolio of U.S. (50) and foreign patents (120)
- HQ in Houston, TX
- Innovation Center and Distribution in East Providence, RI,
- Manufacturing in US and China, Distribution to 50 states, Europe and SE Asia



HASSLE- AND FRUSTRATION-FREE APPLICATIONS


Just push to connect for a permanent plumbing connection in 1/4 the time of soldered technology.



REMOVABLE · REUSABLE · PUSH CONNECT · NO HARMFUL CHEMICALS · FULL FLOW


Removeable and Reusable

SLIP CLIP RELEASE TOOL

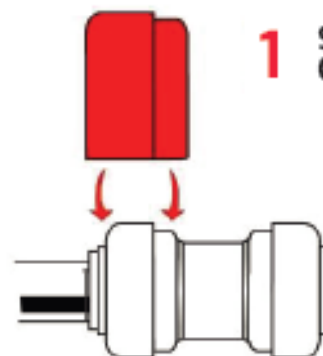

1 SLIDE THE SLIP CLIP RELEASE TOOL
OVER THE FITTING CONNECTION

2 PULL THE TUBING
FROM THE FITTING

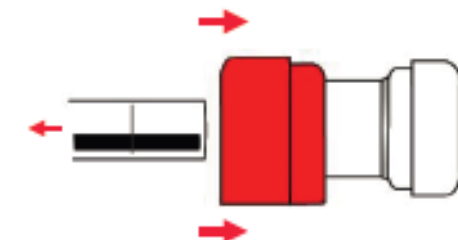

Where to Use / Versatility



PLUMBING



HEATING



OUTDOOR PLUMBING



MARINE



RV & MOBILE HOMES



IRRIGATION

**WORKS ON PIPING
AND TUBING**

Tested to Industry Standards.

- Works on
- Copper
 - PEX
 - PE-RT
 - CPVC Tubing

VARIOUS APPLICATIONS

- Works on fluids, inert gases, water and air.
- Brass fittings are certified for potable and hydronic heating installations
- Underground applications
- In-wall applications

WIDE ASSORTMENT

Couples	Elbows
Adapters	Tees
Caps	Ball Valves
Gate Valves	Check Valves
Reducers	¼" to 2" sizes

UNMATCHED VALUE

Professional Grade

Superior Warranty (75 yrs)

Easiest Installation

Stainless Steel PTC Fittings

Corrosion resistant stainless steel for use in the toughest plumbing applications. Agriculture, Marine, Below ground, outdoor, perfect for any application.

Proactive response to changing Safe Drinking Water regulation changes

- EPA “Lead and Copper Rule” 2021 revisions (LCRR)
- California State Water Resources Control Board “Health & Safety Code”

Unique Features & Benefits

- Professional grade lead-free 304 stainless steel construction
- Zero lead content
- Large sizes; 1-1/4”, 1-1/2”, & 2”
- Best corrosion resistance

QuickFitting Shared Features & Benefits

- Same patented design which delivers superior sealing performance and lower insertion force
- Same fast, trouble-free installation on Copper, PEX, PE-RT or CPVC tubing
- Same patented SlipClip™ release tool allows for simple and quick disconnection, one tool for both Brass & Stainless Steel
- Same Certifications to ASSE 1061-2015, NSF/ANSI/CAN 61-2019, and NSF/ANSI/CAN 372-2020
- No silicone tape wrapping required for underground applications



Our Value to your customers?

SAVINGS

90° Elbow Adapter

Push-to-Connect x FNPT Connection Type

↑ For Tube OD	Pipe Size	Maximum Operating Pressure	Maximum Operating Temperature	Fitting Body Material	Brand	Price
1/2 in	1/2 in	200 psi	200 °F	Brass	APPROVED VENDOR	\$7.98
1/2 in	1/2 in	200 psi	200 °F	Brass	SHARKBITE	\$11.40
3/4 in	3/4 in	200 psi	200 °F	Brass	APPROVED VENDOR	\$13.29

30 % Savings
QF: 816ZN7
SB: 19F879

Straight Adapter

Push-to-Connect x FNPT Connection Type

↑ For Tube OD	Pipe Size	Maximum Operating Pressure	Maximum Operating Temperature	Fitting Body Material	Brand	Price
1/4 in	1/2 in	200 psi	200 °F	Brass	SHARKBITE	\$11.72
1/2 in	1/2 in	200 psi	200 °F	Brass	APPROVED VENDOR	\$6.15
1/2 in	3/4 in	200 psi	200 °F	Brass	APPROVED VENDOR	\$7.98
1/2 in	3/4 in	200 psi	200 °F	Brass	SHARKBITE	\$11.56
3/4 in	1/2 in	200 psi	200 °F	Brass	SHARKBITE	\$10.25
3/4 in	3/4 in	200 psi	200 °F	Brass	APPROVED VENDOR	\$7.64
3/4 in	3/4 in	200 psi	200 °F	Brass	SHARKBITE	\$10.10
1 in	1 in	200 psi	200 °F	Brass	SHARKBITE	\$22.84

31 % Savings
QF: 816ZN1
SB: 19F895

24 % Savings
QF: 816ZL7
SB: 19F872

Our Value to your customers?

STAINLESS

Stainless Steel Push-to-Connect Tube Fittings



Stainless steel push-to-connect tube fittings are durable and resist corrosion from many caustic chemicals, corrosive fluids, oils, and gases. They withstand pressure and high temperatures.

90° Elbow

Push-to-Connect x Push-to-Connect Connection Type

↑ For Tube OD	Pipe Size	Maximum Operating Pressure	Maximum Operating Temperature	Fitting Body Material	Brand	Price
1/2 in x 1/2 in	—	200 psi	200 °F	Stainless Steel	APPROVED VENDOR	\$9.19
3/4 in x 3/4 in	—	200 psi	200 °F	Stainless Steel	APPROVED VENDOR	\$11.03
1 in x 1 in	—	200 psi	200 °F	Stainless Steel	APPROVED VENDOR	\$22.32

90° Elbow Adapter

Push-to-Connect x FNPT Connection Type

↑ For Tube OD	Pipe Size	Maximum Operating Pressure	Maximum Operating Temperature	Fitting Body Material	Brand	Price
1/2 in	1/2 in	200 psi	200 °F	Stainless Steel	APPROVED VENDOR	\$8.80
3/4 in	3/4 in	200 psi	200 °F	Stainless Steel	APPROVED VENDOR	\$14.66

Push-to-Connect x MNPT Connection Type

↑ For Tube OD	Pipe Size	Maximum Operating Pressure	Maximum Operating Temperature	Fitting Body Material	Brand	Price
1/2 in	1/2 in	200 psi	200 °F	Stainless Steel	APPROVED VENDOR	\$11.69
3/4 in	3/4 in	200 psi	200 °F	Stainless Steel	APPROVED VENDOR	\$14.66

27 SKUS

Up to 2” sizes

Lead-Free

Corrosion Resistant

75 Year Warranty

Only Available through
QuickFitting

10% Premium over Brass

Sample Kits Available



X-References

Push to Connect:

- Shark Bite
- John Guest
- Homeworks
- Watts

Press Fit:


- Viega
- Nibco
- Streamline

HVAC:

- Parker

Mix of Stainless & Brass 1/2" Fittings | Removal Tool | Copper and Pex Sample Pipe

Push to connect technology in HVAC connection including with todays newest flammable refrigerants

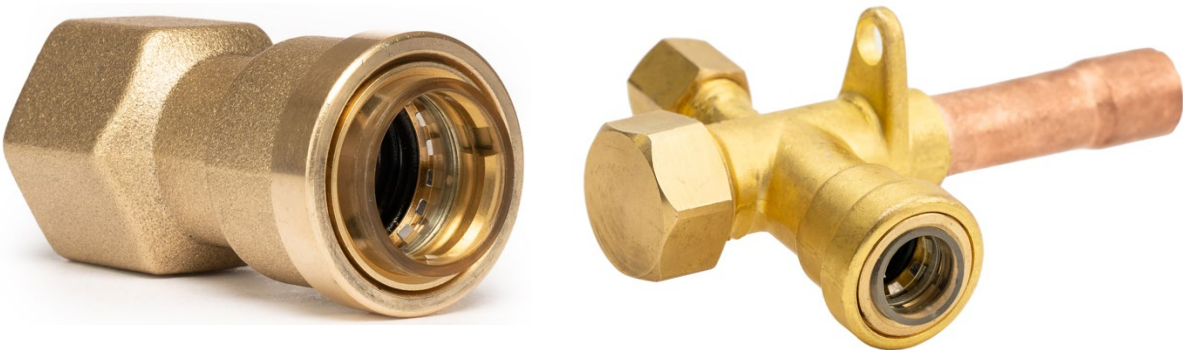

23 New Skus to Launch on G.com within 30 days
Approved Vendor
Expecting Same type of \$ Savings

Previously Purchased
[Sign in](#) to view purchased products

In Stock at Branch

Select a Pickup Branch

Fitting Shape

☐ 90° Elbow

☐ Coupling

☐ Flare Adapter

Size

☐ 1/2 in x 1/2 in

☐ 1/2 in x 3/4 in

☐ 1/4 in x 1/4 in

☐ 1/4 in x 7/16 in

☐ 3/4 in x 3/4 in

☐ 3/8 in x 3/8 in

☐ 3/8 in x 5/8 in

☐ 5/8 in x 5/8 in

☐ 7/8 in x 7/8 in

Connection Type

Refrigerant Push-to-Connect Tube Fittings

32 products

Refrigerant push-to-connect tube fittings create leak-free connections for refrigerant tubing. Brazing torches or press tools are not required for installation, increasing safety and efficiency for users.



Brass Push-to-Connect Tube Fittings



Push-to-connect tube fittings have durable brass bodies and install securely on refrigerant tubing for leak-free connections. Their hydrogenated nitrile (HNBR) O-rings are ideal for use with R410A refrigerant, but are not for use with R22 refrigerant.

- Brand: PARKER
- Series: ZoomLock

90° Elbow



Size	Connection Type	Fitting Thread Size	Maximum Operating Pressure	Maximum Operating Temperature	Price
1/4 in x 1/4 in	Push-Fit x Push-Fit	—	870 psi	250 °F	\$55.75
3/8 in x 3/8 in	Push-Fit x Push-Fit	—	870 psi	250 °F	\$66.33
1/2 in x 1/2 in	Push-Fit x Push-Fit	—	870 psi	250 °F	\$68.70
5/8 in x 5/8 in	Push-Fit x Push-Fit	—	870 psi	250 °F	\$74.79
3/4 in x 3/4 in	Push-Fit x Push-Fit	—	870 psi	250 °F	\$113.33
7/8 in x 7/8 in	Push-Fit x Push-Fit	—	870 psi	250 °F	\$122.19

Graingerized Catalog PDF's



PRODUCT CATALOG

OVERBUILT,
NOT OVERPRICED.



BRASS



STAINLESS STEEL



COPPER

QUICKFITTING® PUSH FITTINGS
U.S. Patent #8,205,915

655 Waterman Ave
East Providence, RI 02914
Tel: (877) 238-4826
Fax: (877) 258-4826

AVAILABLE THROUGH
GRAINGER
FOR THE ONES WHO GET IT DONE



SCAN HERE
WITH YOUR PHONE OR
VISIT QUICKFITTING.COM
FOR MORE INFO

OVERBUILT, NOT OVERPRICED.



STAINLESS STEEL

The QuickFitting Stainless Steel push fittings product line delivers the same patented design with superior sealing performance but raises the bar for the industry with a 100% lead-free professional grade 304 stainless steel body. These premium fittings offer the best corrosion resistance and are available in larger sizes (1-1/4" - 2").



COUPLING	PART #	PRODUCT DESCRIPTION	BOX QTY.	CASE QTY.	GR SKU#
	SS811R	1/2" x 1/2" Straight Coupling	40	240	816ZP5
	SS821R	3/4" x 3/4" Straight Coupling	25	150	816ZP6
	SS831R	1" x 1" Straight Coupling	20	120	816ZP7
	SS851R	1-1/4" x 1-1/4" Straight Coupling	8	48	816ZP8
	SS861R	1-1/2" x 1-1/2" Straight Coupling	4	24	816ZP8
	SS871R	2" x 2" Straight Coupling	3	18	
	SS841R	3/4" x 1/2" Reducing Coupling	30	180	816ZP9
	SS817R	1/2" x 1/2" Repair Coupling	20	120	816ZR0
	SS827R	3/4" x 3/4" Repair Coupling	12	72	816ZR1

FEMALE STRAIGHT ADAPTER	PART #	PRODUCT DESCRIPTION	BOX QTY.	CASE QTY.	GR SKU#
	SS812FR	1/2" x 1/2" FNPT Straight Female Adapter	40	240	816ZR2
	SS822FR	3/4" x 3/4" FNPT Straight Female Adapter	30	180	816ZR3
	SS832FR	1" x 1" FNPT Straight Female Adapter	25	150	816ZR4
	SS852FR	1-1/4" x 1-1/4" FNPT Straight Female Adapter	10	60	
	SS862FR	1-1/2" x 1-1/2" FNPT Straight Female Adapter	6	36	816ZR5
	SS872FR	2" x 2" FNPT Straight Female Adapter	5	30	
	SS842FR	1/2" x 3/4" FNPT Straight Female Adapter	30	180	

Quick Fitting Holding Company, LLC.
655 Waterman Ave., East Providence, RI 02914
Tel: (877) 238-4826 • Fax: (877) 258-4826

6

QUICKFITTING

10