



6XUR1



FEATURES:


- Count down timer
- High speed micro processor calculates quickly
- Ideal for material and project estimating/bidding
- Accurate to +/- 1/16"/230'
- Easy as 1-2-3: Turn on - press measure button - record measurement
- Efficient one person measurements
- Compact size fits easily in tool belt or pocket

SPECIFICATIONS:

Accuracy
Battery Life
Calculated Measuring
Dimensions
Indirect Measuring
IP Protection Class
Laser Classification
Laser Wavelength
Maximum Power Output
Measurement Reference Settings
Power Supply
Temperature Range Storage
Temperature Range Usage
Tripod Screw Thread
Units of Measure
Weight
Working Range
Measuring Types

31/16" (32mm)
10,000 Measurements
Addition/Subtraction, Area, Volume
4.33" x 1.77" x 1.18" (110 x 45 x 30mm)
Pythagoras Functions
54
Class II
650nm (Red)
<1mW
Front, Rear, Corner Extension Piece
2 "AA" Alkaline Batteries
-4°F to +140°F (-20°C to +60°C)
+32°F to +104°F (0°C to 40°C)
NA
Inches (decimal, 1/8, 1/16, 1/32), Feet, Feet + Inches, Metric
.66lbs (0.3kg)
2" - 230' (70m)
Single Distance, Min/Max, Continuous Measuring, Countdown Timer, Stakeout Function

230' LASER DISTANCE MEASURE

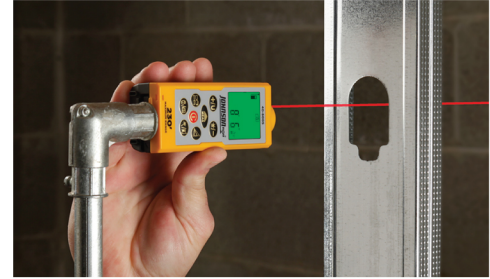

36M922



FEATURES:

- Count down timer
- High speed micro processor calculates quickly
- Ideal for material and project estimating/bidding
- Accurate to +/- 1/16"/230'
- Easy as 1-2-3: Turn on - press measure button - record measurement
- Efficient one person measurements
- Compact size fits easily in tool belt or pocket

SPECIFICATIONS:


Accuracy
Battery Life
Calculated Measuring
Indirect Measuring
IP Protection Class
Laser Classification
Laser Wavelength
Maximum Power Output
Measurement Reference Settings
Measuring Types

31/16" (32mm)
10,000 Measurements
Addition/Subtraction, Area, Volume, 3 Pythagoras Functions (2-Point, 3-Point, 3-Point Partial)
Pythagoras Functions: Front, Rear, Tripod Thread
52
Class II
650nm (Red)
<1mW
Front, Rear, Tripod Thread
Single Distance, Min/Max, Continuous Measuring, Sound Activated Mode, stakeout Function (2 settings)
2 "AA" alkaline battery (included)
-4°F to +140°F (-20°C to +60°C)
+23°F to +104°F (-5°C to 40°C)
1/4" - 20
Inches, Feet + Inches, Metric
0.325lbs (0.147kg)
2" - 165' (50m)


165' LASER DISTANCE MEASURE

Quickly & Accurately Calculates:

Length



2-Point Pythagoras



Area/Square Footage



3-Point Pythagoras



Volume/Cube



3-Point Partial Pythagoras

