



LS61H1P **FINISH STAPLER**

SPECIFICATIONS

Trigger	Selectable
Op. Pressure	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 CPM)	2.4 scfm
Air Inlet	¼" NPT
Weight	3.1 lbs (1.4 kg)
Height	9.5" (241 mm)
Length	10.25" (260 mm)
Width	2.5" (65 mm)
Main Body Material	Aluminum

FASTENERS


Series	L
Capacity	110
Range	⅜" - 1½" (10mm - 38mm)
Gauge	18
Crown	¼" (6mm)
Collation	Straight glued strip

INCLUDES

Carrying Case
¼" Fitting

SOLD SEPARATELY

Parts Kit
YK0908 Repair Kit

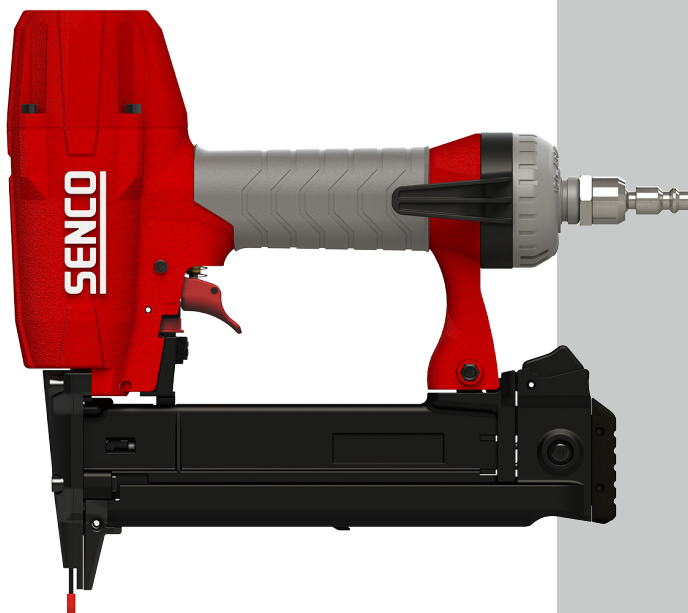

¼" CROWN, 1½" FINISH STAPLER

The LS61H1P is an 18-gauge finish stapler that drives ¼" crown staples from ⅜" to 1½" in length. Convenience features like SENCO's oil-less design eliminates the need for routine lubrication. This stapler is ideal for woodworking, cabinetry, and both internal and external trim applications.

TOOL OVERVIEW


- Oil-less design eliminates the need for routine lubrication
- Selectable trigger to switch between contact or sequential firing modes
- Tool-free depth adjustment for consistent flush or countersunk drives
- 360° adjustable exhaust directs air away from the operator or worksurface
- Rotatable belt hook for quick right/left hand access

APPLICATIONS

Woodworking, cabinets, soffits, drawer assembly.



1/4" CROWN, 1 1/2" FINISH STAPLER

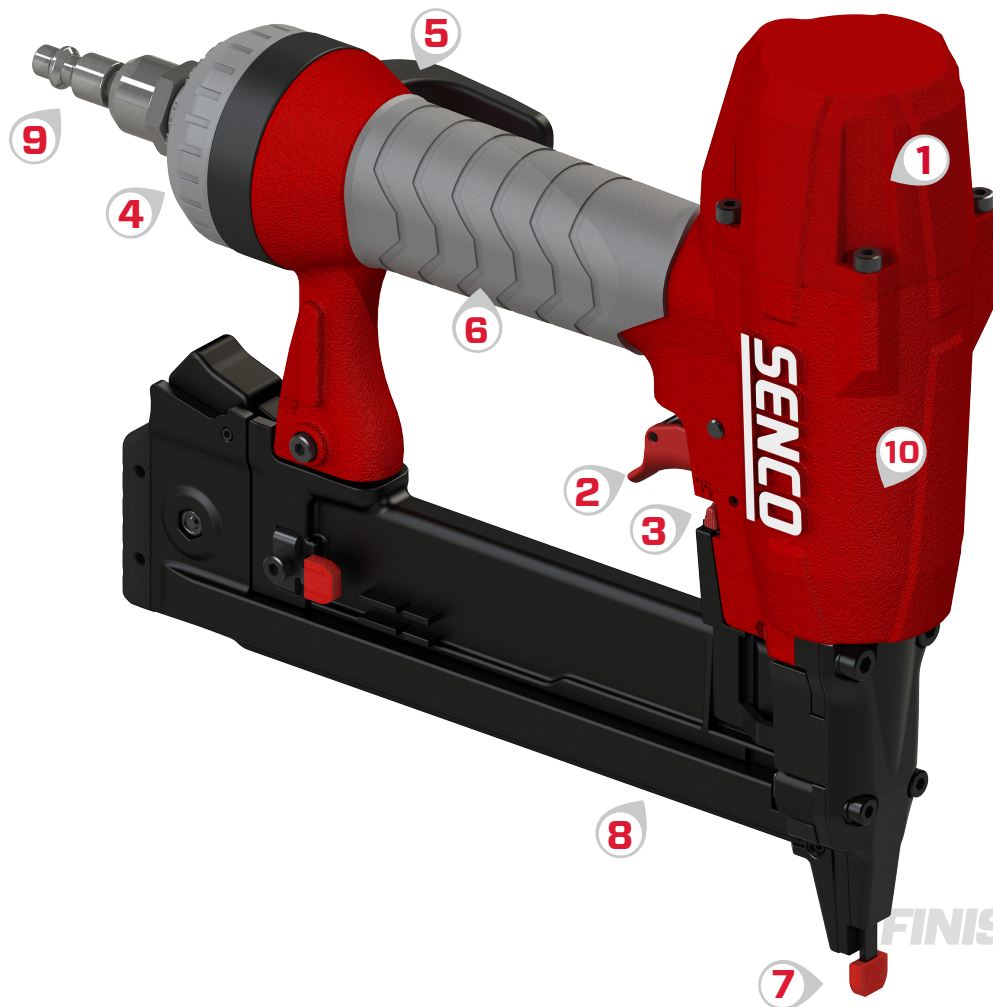

LS61H1P
FINISH STAPLER

- | | | |
|---|--|--|
| 1 OIL-LESS DESIGN
Routine lubrication is not required. Saving you time with daily maintenance | 5 ROTATABLE BELT HOOK
Provides quick right/left hand access when needed | 9 SWIVEL PLUG
For added maneuverability |
| 2 SELECTABLE TRIGGER
Makes it easy to switch between contact or sequential firing modes | 6 ERGONOMIC OVERMOLDED GRIP
Reduces fatigue and increases control of the tool | 10 ALUMINUM MAINBODY
Durable and lightweight |
| 3 TOOL-FREE DEPTH ADJUSTMENT
For consistent flush or countersunk drives | 7 NO-MAR PAD
Protects the worksurface from being scratched or damaged. Extra no-mar pad included. | |
| 4 360° ADJUSTABLE EXHAUST
Directs air away from the operator and worksurface | 8 RELOAD INDICATOR
Allows the user to quickly identify when it's time to reload (not visible, on reverse side of tool) | |

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. For additional information on Senco fastening systems and how Senco will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: www.Senco.com.