



PC1131

SPECIFICATIONS


Weight	60 lbs (27.22 kg)
Height	14.5" (368 mm)
Length	20.5" (521 mm)
Width	16" (419 mm)
Motor	Induction
Power Source	Electric 115 volts
Power Type	Corded
Current Draw /Max AMPs	14 amps @115V
Horsepower	2 hp (running)
Pump	Oil-Splash
SCFM at 90 psi	4.4
Max Pressure	125 psi
Pump-up Time	67 Seconds (0 - 125 psi)
Recovery Time	16 Seconds (90 - 125 psi)
Tank Storage	4.3 gallon
¼" Quick Connect Coupler	1
Regulator	Yes
CSA Approved	Yes

INCLUDES

- 1 year limited warranty
- ¼" universal coupler
- Compressor oil

ACCESSORIES SOLD SEPARATELY

32 OZ COMPRESSOR PUMP OIL	PC0344
DRAIN PLUG ¼" MPT	PC0357
BLOW GUN ¼" FPT	PC0489
TEFLON® THREAD SEALING TAPE	PC0349

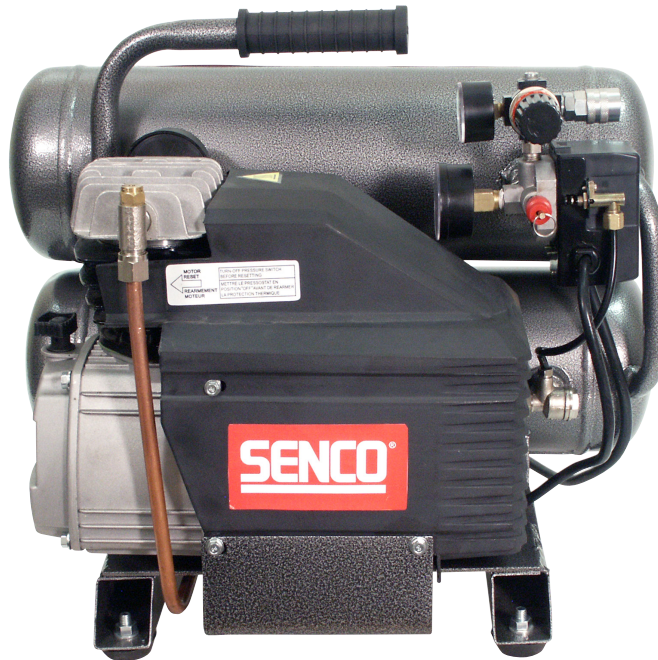

4.3-Gallon 2 HP (running) Compressor

ITEM #PC1131

SENCO's twin-stack PC1131 workhorse, oil-splash-lubricated compressor generates 4.4 CFM to provide power for all types of applications, from finish to framing. The cast iron cylinder and heavy-duty induction motor provide the durability expected by professional contractors.

APPLICATIONS

- Framing and Sheathing
- Roofing and Decking
- Finish and trim

FEATURES AND BENEFITS

- Cast iron cylinder for superior pump life
- Compact twin stack tank design
- Direct drive pump and induction motor for efficient operation
- Heavy duty induction motor
- Draws only 13 amps, so it won't trip circuit breakers
- Cold start valve allows for easy start-up in cold climates.
- Oil-Splash design for exceptional durability
- Electric overload protection switch with manual reset

PC1131

4.3-Gallon 2 HP (running) Compressor

ITEM# PC1131



4.3 Gallon Capacity
Ideal for framing, roofing, finish
nailers and staplers

Comfort Handle and Grip
good balance for easy transporting to the job site.

Cold Start Valve
easy start-up in cold weather.

Cast-iron Cylinder
improves pump life


High SCFM
4.4 SCFM @ 90 psi.

Oil-lube/Direct Drive
induction motor
long life and efficient operation
improved durability.

Pump-up/Recovery Time
67 seconds pump-up,
16 seconds recovery.

Low Amp Draw
only 14 amp reduce tripped circuits,
overload protection has manual reset.

Powerful and Fast
weighs just 60 lbs.

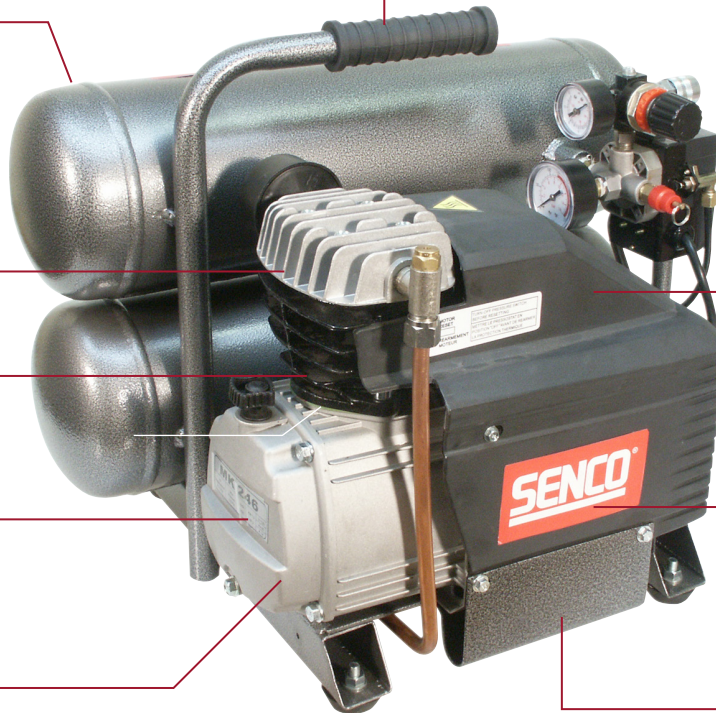

Always read the Operators Manual and Safety Instructions with all tool to ensure proper use and safety precautions. For additional information on SENCO fastening systems and how SENCO will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: senco.com