

QUICKFITTING[®]

HVAC

CONNECT REFRIGERANT LINES IN SECONDS

QuickFitting[®] HVAC Push-to-Connect

A product line that provides a quicker and safer connection of HVAC/R systems than traditional methods

No brazing, flaring or swaging!



INSTALLS FAST



**NO TOOLS
NEEDED**



NO FLAMES



** Remove yellow dust caps prior to installation.*


WHY PUSH-TO-CONNECT?

UL CERTIFIED

Approved for major refrigerants, including A2L refrigerants

DURABLE

Heavy duty, corrosion and UV resistant brass body

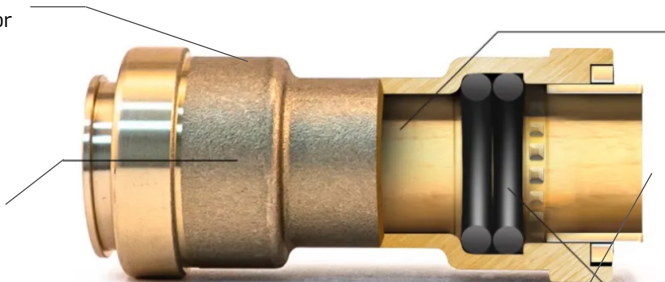

REMOVABLE

Quickly and easily disconnects with release tool

LEAK-RESISTANT

Prevents connection leaks caused by galling, vibration, pulsation and extreme temperature changes

PATENTED DESIGN

Double O-ring and grip ring seal ensures leak-proof connections

Approved Refrigerants

R22, R32, R134a, R290, R404a, R407a, R407c, R410a, R500, R600a

A2L Class: R452B, R454B



www.QuickFitting.com

QUICK FITTING HOLDING COMPANY, LLC.
655 WATERMAN AVE., EAST PROVIDENCE, RI, USA 02914
TEL: (877) 238-4826 / FAX: (877) 258-4826

LITGHVACM25

Approved Applications

- Residential and commercial use
- Copper and coated aluminum line sets
- Mini-split HVAC units
- Unitary indoor coils

Maximum Rated Pressure

- 870 psi / 60 bar



5 Year Limited Warranty


5 Yr. Warranty applies to QuickFitting® HVAC PTC fittings.
Release tools have a 1 Yr. Limited Warranty

Product Type	Size	QuickFitting #	Grainger #
Union 	1/4"	HV-SC-0250	833J44
	3/8"	HV-SC-0375	833J45
	1/2"	HV-SC-0500	833J46
	5/8"	HV-SC-0625	833J47
	3/4"	HV-SC-0750	833J48
	7/8"	HV-SC-0875	833J49
Union Reducer 	3/8" x 1/4"	HV-CR-375250	833J56
	1/2" x 3/8"	HV-CR-500375	833J57
	5/8" x 1/2"	HV-CR-625500	833J58
Socket 	1/4"	HV-FA-0250	833J62
	3/8"	HV-FA-0375	833J63
	1/2"	HV-FA-0500	833J64
	5/8"	HV-FA-0625	833J65

Product Type	Size	QuickFitting #	Grainger #
Elbow 	1/4"	HV-SE-0250	833J50
	3/8"	HV-SE-0375	833J51
	1/2"	HV-SE-0500	833J52
	5/8"	HV-SE-0625	833J53
	3/4"	HV-SE-0750	833J54
	7/8"	HV-SE-0875	833J55
Elbow Reducer 	3/8" x 1/4"	HV-ER-375250	833J59
	1/2" x 3/8"	HV-ER-500375	833J60
	5/8" x 1/2"	HV-ER-625500	833J61
Release Tools 	1/4", 3/8", 1/2" & 5/8"	HV-RTMT2562K	833J66
	3/4" & 7/8"	HV-RT7587K	833J67

FIND US ONLINE

- Visit **Grainger.com**
- Search for Category **Refrigerant Push-to-Connect Tube Fittings**
- Select the Brand **QUICKFITTING**

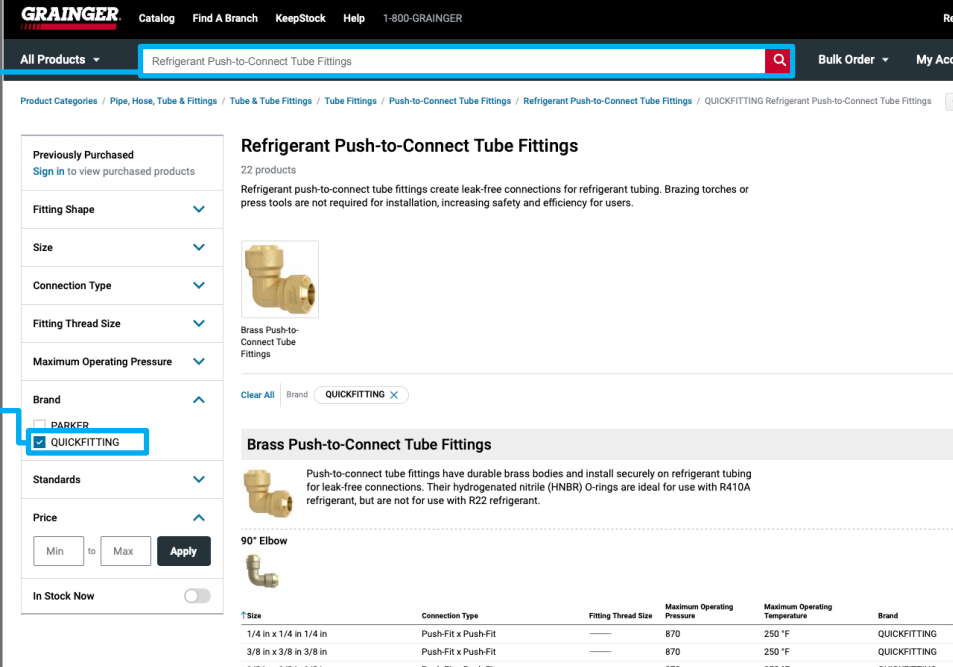

The screenshot shows the Grainger website interface. At the top, there's a navigation bar with 'Catalog', 'Find A Branch', 'KeepStock', 'Help', and '1-800-GRAINGER'. Below this is a search bar containing 'Refrigerant Push-to-Connect Tube Fittings'. The left sidebar shows filters for 'Previously Purchased', 'Fitting Shape', 'Size', 'Connection Type', 'Fitting Thread Size', 'Maximum Operating Pressure', 'Brand' (with 'QUICKFITTING' selected), 'Standards', 'Price', and 'In Stock Now'. The main content area displays 'Refrigerant Push-to-Connect Tube Fittings' with 22 products listed. A description states: 'Refrigerant push-to-connect tube fittings create leak-free connections for refrigerant tubing. Brazing torches or press tools are not required for installation, increasing safety and efficiency for users.' Below this, there's a section for 'Brass Push-to-Connect Tube Fittings' with a description: 'Push-to-connect tube fittings have durable brass bodies and install securely on refrigerant tubing for leak-free connections. Their hydrogenated nitrile (HNBR) O-rings are ideal for use with R410A refrigerant, but are not for use with R22 refrigerant.' A table at the bottom lists specific fittings: 1/4" Elbow, 3/8" Elbow, and 1/2" Elbow, all with a connection type of 'Push-Fit x Push-Fit', a fitting thread size of '1/4"', a maximum operating pressure of '870', and a maximum operating temperature of '250 °F'. The brand for all listed items is 'QUICKFITTING'.

www.QuickFitting.com

QUICK FITTING HOLDING COMPANY, LLC.
655 WATERMAN AVE., EAST PROVIDENCE, RI, USA 02914
TEL: (877) 238-4826 / FAX: (877) 258-4826

LITGHVACM25