

RELIANCE[®]

CONTROLS

SINCE
1909



TRANSFER SWITCHES

Manual switch gear and accessories for portable generators and other back-up power sources.



Reliance Controls Corporation has been manufacturing high-quality electrical products since 1909. We have built a strong reputation not only for the quality of our products, but also the manner in which we conduct our business. We strive to exceed the expectations of our customers.

Reliance introduced the first two transfer Switches engineered specifically for portable generators in 1983. Today we offer over 500 manual transfer Switches, transfer panels and generator-

ready load centers. Added to this offering is a broad selection of accessories including power inlet boxes, generator cords, wattmeter boxes and wiring devices. Reliance is the leading manufacturer of manual transfer equipment for portable generators.

We continue to broaden our line with innovative products of exceptional quality.



All Transfer Switches in this catalog are listed by Underwriters Laboratories Inc. and are suitable for use in accordance with article 702 of the National Electric Code ANSI/NFPA 70.





CONTENTS	Power Inlet Boxes	4
	PB-Series.....	5
	PR-Series.....	6
	PBN-Series	7
	Pro-Tran2® Back-Up Power Transfer Equipment	8
	204-Series.....	12
	304-Series.....	12
	206-Series.....	13
	506-Series.....	13
	306-Series.....	13
	310-Series	14
	510-Series	14
	K2F06	15
	K2F10.....	15
	R304-Series.....	16
	R306-Series	12
	R506-Series	12
	R308-Series	13
	R310-Series	13
	R510-Series	13
	RN306C.....	18
	306CRK.....	21
	310CRK	21
	306CDK.....	22
	306CDKN	22
	310CDK	23
	310CDKN.....	23
	Through The Wall Kit	24
	TF151W	26
	TF201W	26
	TF152W	26
	TF202W.....	26
	CSR Series.....	27
	Signa Series	28
	Color Connect™ Cords & Devices	30
	Molded-Ends Power Cords.....	32
	Color Connect Adapter Cords	34
	Plugs, Connectors & Inlets	38
	Panel/Link® Generator-Ready Load Centers	40
	TCA - Indoor	42
	TCA - Outdoor.....	43
	TRB - Indoor	44
	TRB - Outdoor.....	45
	TRK - Indoor	46
	TRK - Outdoor.....	47
	TTH - Indoor	48
	TTH - Outdoor.....	49
	TTV - Indoor.....	50
	TTV - Outdoor.....	51
	TWB - Outdoor.....	52
	PK-Series.....	53
	Circuit Testers & Home Monitoring Products	56
	Watt Meter Boxes	58

PB-SERIES | PBN-SERIES | PR-SERIES


POWER INLET BOXES



**RUGGED, WEATHER RESITANT,
QUALITY CONSTRUCTION,
MADE IN THE USA.**



POWER INLET BOXES

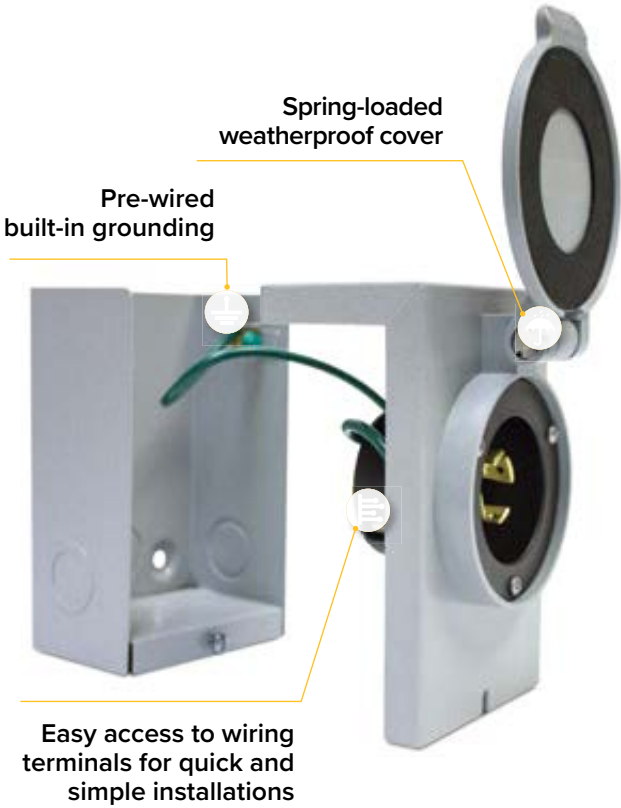

- Anti-Rust**
Powder Coated Housing
- High Impact**
Industrial Grade Steel



PB30 (Grainger #2KEP7)

PB-Series Power Inlet Boxes



NEMA 3R
Rated



Model#	Amps	Rating, VAC	Config	Dimensions (H x W x D)	Shipping Wgt.	UPC
PB15	15A	15A@125V	5-15	6 x 3.75 x 3.25	2	8-15181-01338-7
PB20	20A	20A@125/250V	L14-20	6 x 3.75 x 3.25	2	8-51890-00007-2
PB30 (2KEP7)	30A	30A@125/250V	L14-30	6 x 3.75 x 3.25	2	8-51890-00008-9
PB31	30A	30A@125V	L5-30	6 x 3.75 x 3.25	2	8-15181-01339-4
PB50	50A	50A@125/250V	CS6375	6 x 3.75 x 3.25	2	8-51890-00028-7
PB51	50A	50A@125V	CS6377	6 x 3.75 x 3.25	2	8-15181-01340-0

The Raintight NEMA 3R power inlet box is designed for use with any transfer switch, generator-ready load center, as well as many stand-alone applications. The power inlet box is usually installed outdoors, in an area where the generator is being used. Using one of the four combination 1/2-inch and 3/4-inch knockouts (One on each side, bottom and back) the power inlet box can be wired directly to the transfer switch or panel. The exclusive patented design provides generous wiring space and facilitates rough-in.

 **Anti-Rust**
Powder Coated Housing

 **High Impact**
Industrial Grade Steel

Built-in Breaker Protection

Bottom cord entry
with spring-loaded
weatherproof cover



PR-Series

Power Inlet Boxes




NEMA 3R
Rated



Model#	Amps	Rating, VAC	Config	Dimensions (H x W x D)	Shipping Wgt.	UPC
PR20	20A 	20A@125/250V	L14-20	8.75 x 6.75 x 5.5	6.2	8-15181-01341-7
PR30	30A 	30A@125/250V	L14-30	8.75 x 6.75 x 5.5	6.2	8-15181-01032-4
PR50	50A 	50A@125/250V	CS6375	8.75 x 6.75 x 5.5	6.3	8-15181-01342-4

Similar to the PB-Series power inlet box, the PR-Series is designed to help facilitate the connection of a back-up power source to a home. The PR-Series is unique in that it also features a circuit breaker that matches the amperage of the power inlet.

POWER INLET BOXES

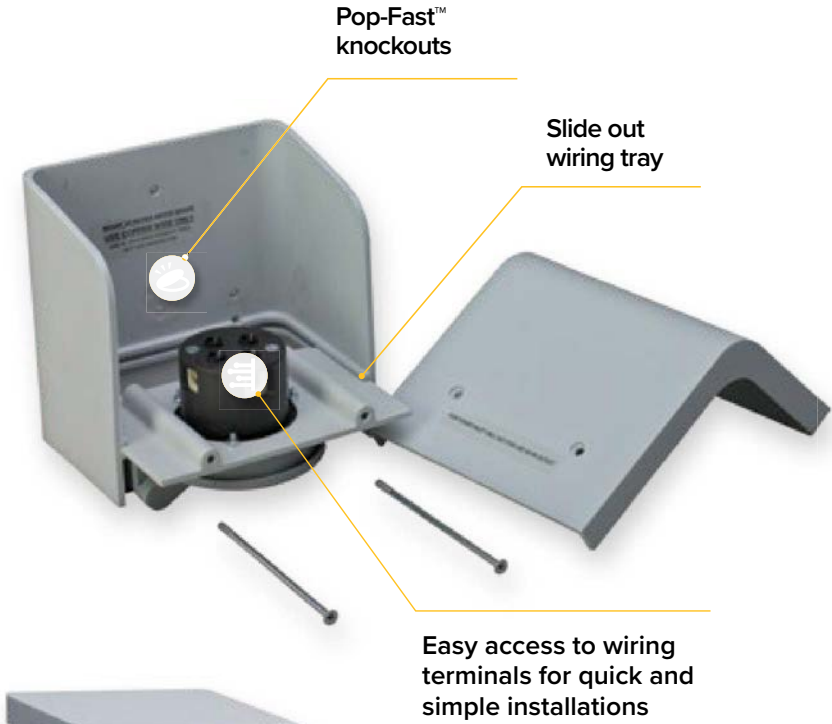

-  **Anti-Rust**
Non-Metallic Housing
-  **High Impact**
Polycarbonate

Bottom cord entry
with spring-loaded
weatherproof cover



PBN50



PBN50 (Grainger #13V406)
PBN30 (Grainger #13V405)

PBN-Series Power Inlet Boxes



Model#	Amps	Rating, VAC	Config	Dimensions (H x W x D)	Shipping Wgt.	UPC
PBN15	15A 	15A@125V	5-15	6.25 x 6.25 x 4.6	2	8-15181-01343-1
PBN20	20A 	20A@125/250V	L14-20	6.25 x 6.25 x 4.6	2	8-15181-01070-6
PBN30 (13V405)	30A 	30A@125/250V	L14-30	6.25 x 6.25 x 4.6	2	8-15181-01071-3
PBN31	30A 	30A@125V	L5-30	6.25 x 6.25 x 4.6	2	8-15181-01344-8
PBN50 (13V406)	50A 	50A@125/250V	CS6375	6.25 x 6.25 x 4.6	2	8-15181-01072-0
PBN51	50A 	50A@125V	CS6377	6.25 x 6.25 x 4.6	2	8-15181-01345-5
PBN52	50A 	50A@125/250V	14-50	6.25 x 6.25 x 4.6	2	8-15181-01752-1

The PBN Series features an exclusive POP-FAST™ 3/4" knockout design that makes for exceptionally fast installation. The interior provides over 100 cubic inches of wiring space. The slide-out base permits easy 360° access to the terminals of the flanged inlet for fast wiring. The through-bolt design is held in place with two 4-1/8" JS500 screws. A water-resistant and bug-proof inlet cover comes standard on all models.

PRO/TRAN[®] 2

TRANSFER SWITCHES

Manual switch gear for portable generators and other back-up power sources.

Icon Legend

	Transfer switch contains 4 - 120V circuits*
	Transfer switch contains 6 - 120V circuits*
	Transfer switch contains 8 - 120V circuits*
	Transfer switch contains 10 - 120V circuits*
	Suitable for use with 20A, 125/250V input
	Suitable for use with 30A, 125/250V input
	Suitable for use with 50A, 125/250V input
	L14-20 Input
	L5-30 Input
	L5-20 Input
	5-20 Input
	CS6364, CS6365, CS6375 Input
	L14-30 Input
	14-50 Input
	TT-30 Input
	5-15 Input

	Product is made from metal
	Product is made from ABS plastic
	Cord has completely sealed (non-removable) molded plug & connector ends
	Cord has assembled (removable) plug & connector ends
	Product is made from Powder Coated Steel
	Product is weather proof / NEMA 3R Rated
	Product is made from a high-impact UV-Coated plastic
	6-gauge conductors
	10-gauge conductors
	12-gauge conductors
	Product has a turn-to-lock connection type
	Product has a straight-blade connection type

* Models come factory wired with a combination of 120V and 240V circuits

KEEPING YOUR HOME POWERED UP WHEN YOU NEED IT MOST




PRO/TRAN[®] 2

Reliance Controls' new Pro/Tran2[®] line of Loadside™ transfer Switches features all the benefits which made the original Pro/Tran[®] an industry-leading product for over 30 years, while incorporating a number of new features to give our customers exactly what they are looking for.

All models are suitable for use with many UL Listed 1-inch interchangeable circuit breakers. They are UL Listed for most popular brands

and types of breakers, including AFCI and GFCI (requires additional wiring). They can be easily re-configured in the field for multiple double-pole circuits if needed. All models include a swing-up protective cover which provides a finished appearance. Optional new color-coded watt meters are included on many models and assist in balancing the generator load. Like all Reliance Pro/Tran[®] transfer Switches, the Pro/Tran2[®] is completely pre-wired for fast installation.

The Pro/Tran2[®] series is UL Listed to Standard 1008 and is suitable for use in accordance with Article 702 of the National Electrical Code ANSI/NFPA 70.

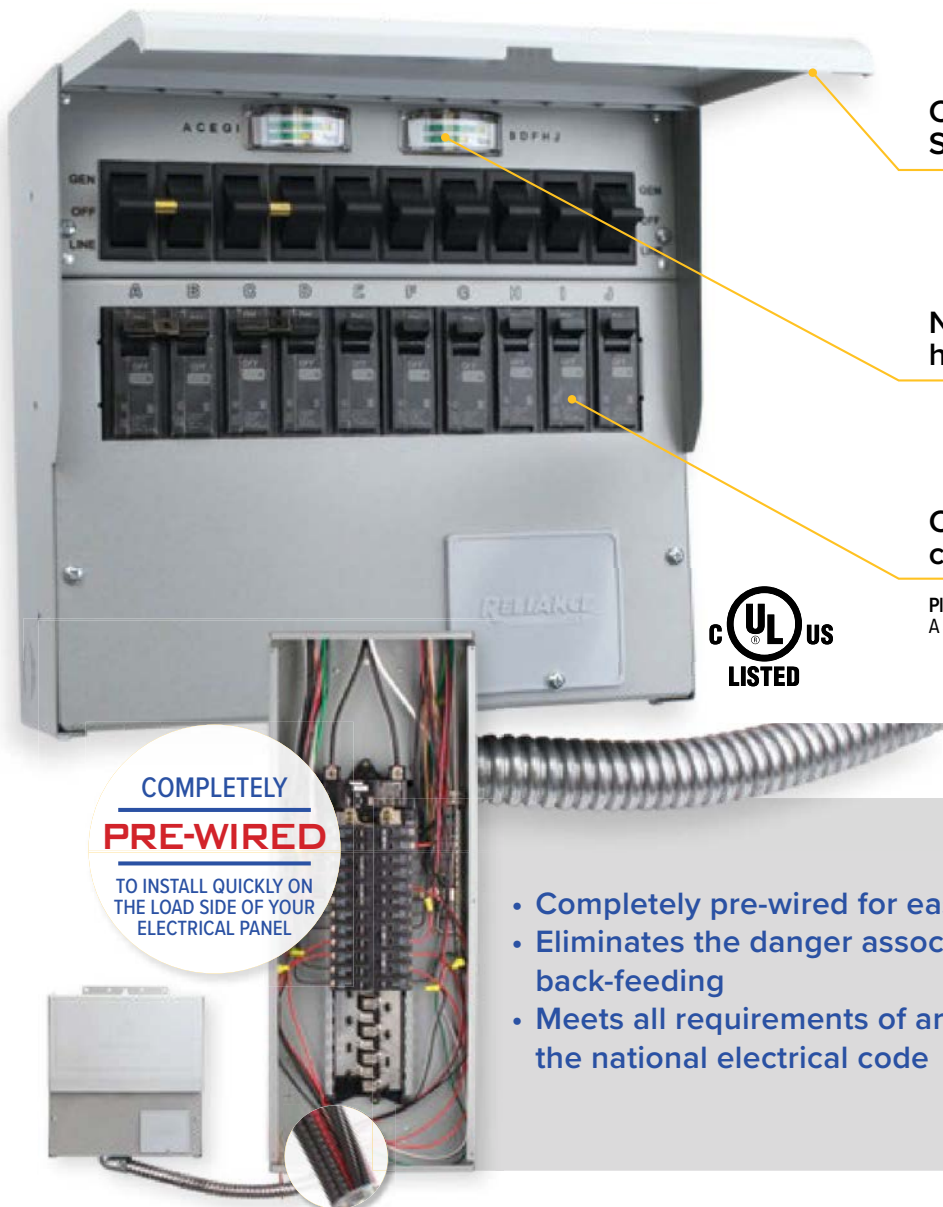

Cover included to protect toggle switches and circuit breakers.

New color-coded watt meters to help balance generator load.

One-inch circuit breakers make changing circuit sizes simple.





Please note:
A & B circuits MAX 30A, all else MAX 20A

- Completely pre-wired for easy installation
- Eliminates the danger associated with back-feeding
- Meets all requirements of article 702 of the national electrical code

MODEL NUMBER BREAKDOWN

Sample Model No.

RN **A** **3** **10** **C** **DK**
1 **2** **3** **4** **5** **6**

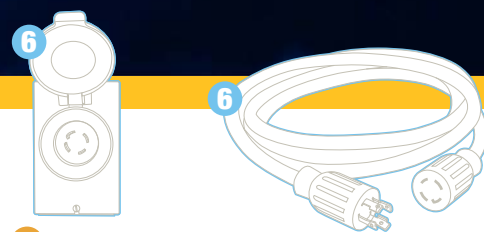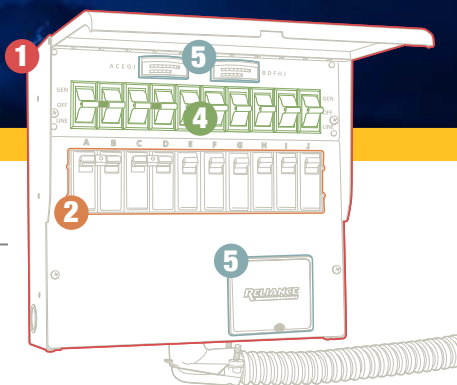

1 **CABINET**
NONE = Indoor cabinet
R = Raintight cabinet
RN = Raintight Non-Metallic

2 **BRANCH CIRCUIT AMPERAGE**
NONE = 20 amp DP breaker in A and B position
A = 30 amp DP breaker in A and B position

3 **CAPACITY (generator output)**
1 = 15 amps @ 125 volts
2 = 20 amps @ 125/250 volts
3 = 30 amps @ 125/250 volts
5 = 50 amps @ 125/250 volts

4 **CIRCUITS**
04 = 4 single pole
06 = 6 single pole or 3 double pole
08 = 8 single pole or 4 double pole
10 = 10 single pole or 5 double pole

5 **CONFIGURATION**
A = Watt meters and power inlet
B = Power inlet, no watt meters
C = Watt meters, no power inlet
CE = Digital watt meters, no power inlet
D = No watt meters, no power inlet

6 **ACCESSORIES / OPTIONS**
NONE = Transfer switch only
RK = Transfer switch + metal inlet box (PB30) + 10 ft. power cord (PC3010)
DK = Transfer switch + metal inlet box (PB30) + 20 ft. power cord (PC3020)
DKN = Transfer switch + non-metallic inlet box (PBN30) + 20 ft. power cord (PC3020)
1 = 125V Transfer Switch

PRO/TRAN TO PRO/TRAN 2 CROSS REFERENCE

Pro/Tran Model No.	Pro/Tran 2 Equivalent
15114A	104B1
20216A	206A
30216A	306A
30310A	310A
30408B	308C
30508B	308A
31404B	304D
31406B	306D
31406C	306C
31406CRK	306CRK
31406CDK	306CDK
31406CDKN	306CDKN
31410B	310D
31410C	310C
31410CRK	310CRK
31410CDK	310CDK
31410CDKN	310CDKN
50408B	508C
51406B	506D
51406C	506C
51410B	510D
51410C	510C
R15114B	R104B1
R20216B	R206A
R30216B	R306A
R30310B	R310A
R50216B	R506A
R50310B	R510A
Q306A	A306A
Q306C	A306C
Q310A	A310A
Q310C	A310C
Q506A	A506A
Q506C	A506C
Q510A	A510A
Q510C	A510C

*Please note: Not all possible combinations from the above chart are possible. If you need further assistance selecting a model, please contact us.

Indoor Transfer Switches

FEATURES

- Completely pre-wired
- Easy toggle switch controls
- Interchangeable 1" circuit breakers
- Swing up protective cover
- Color-coded inlets



204-Series Transfer Switch



Model#	Meters	Inlet	Dimensions (H x W x D)	Shipping Wgt.	UPC
104B1		5-15	11.25 x 7.75 x 4.5	9.9	8-15181-01215-1
204A	.	L14-20	11.25 x 7.75 x 4.5	12.6	8-15181-01324-0
204B		L14-20	11.25 x 7.75 x 4.5	12.2	8 15181-01325-7



304-Series Transfer Switch



Model#	Meters	Inlet	Dimensions (H x W x D)	Shipping Wgt.	UPC
304A	.	L14-30	11.25 x 7.75 x 4.5	12.6	8-15181-01258-8
304B		L14-30	11.25 x 7.75 x 4.5	12.2	8-15181-01259-5
304C	.	N/A	11.25 x 7.75 x 4.5	12.1	8-15181-01260-1
304D		N/A	11.25 x 7.75 x 4.5	12	8-15181-01261-8



*Add prefix "A" to any model for a factory installed 2-pole 30A circuit breaker in A&B position.

**Add suffix "I" to any model for a 125V version of that transfer switch (excludes some models, see specification catalog or call for more details).

INDOOR

SURFACE MOUNT / TRANSFER SWITCHES

Indoor Transfer Switches



206-Series Transfer Switch

6
CIRCUIT

M
METAL

PC
POWDER
COATED
STEEL

L14-20
20
AMP



306-Series Transfer Switch

6
CIRCUIT

M
METAL

PC
POWDER
COATED
STEEL

L14-30
30
AMP

Model#	Meters	Inlet	Dimensions (H x W x D)	Shipping Wgt.	UPC
206A	.	L14-20	11.25 x 7.75 x 4.5	13.2	8-15181-01225-0
206B		L14-20	11.25 x 7.75 x 4.5	12.8	8-15181-01315-8
306A	.	L14-30	11.25 x 7.75 x 4.5	13	8-15181-01226-7
306B		L14-30	11.25 x 7.75 x 4.5	12.8	8-15181-01227-4
306C	.	N/A	11.25 x 7.75 x 4.5	12.7	8-15181-01228-1
306CE	.	N/A	11.25 x 7.75 x 4.5	12.7	
306D		N/A	11.25 x 7.75 x 4.5	12.5	8-15181-01229-8



506-Series Transfer Switch

6
CIRCUIT

M
METAL

PC
POWDER
COATED
STEEL

CS6375
50
AMP

Model#	Meters	Inlet	Dimensions (H x W x D)	Shipping Wgt.	UPC
506A	.	CS6375	11.25 x 7.75 x 4.5	13.2	8-15181-01230-4
506B		CS6375	11.25 x 7.75 x 4.5	13	8-15181-01231-1
506C	.	N/A	11.25 x 7.75 x 4.5	12.7	8-15181-01232-8
506D		N/A	11.25 x 7.75 x 4.5	12.7	8-15181-01233-5



*Add prefix "A" to any model for a factory installed 2-pole 30A circuit breaker in A&B position.

**Add suffix "1" to any model for a 125V version of that transfer switch (excludes some models, see specification catalog or call for more details).



Indoor Transfer Switches

FEATURES

- No feeder breakers required
- Flexible conduit whip with fittings
- Hassle free 5 year warranty




310-Series
Transfer Switch

10
CIRCUIT

M
METAL

Pc
POWDER
COATED
STEEL

L14-30
30
AMP

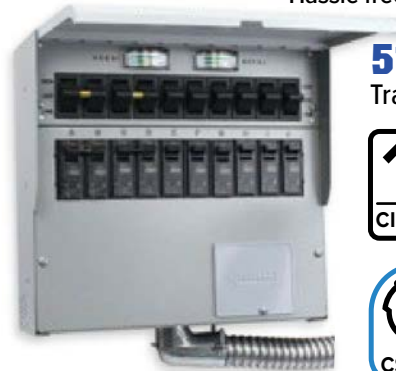

510-Series
Transfer Switch

10
CIRCUIT

M
METAL

Pc
POWDER
COATED
STEEL

CS6375
50
AMP

Model#	Meters	Inlet	Dimensions (H x W x D)	Shipping Wgt.	UPC
310A	•	L14-30	11.25 x 11.75 x 4.5	18.5	8-15181-01209-0
310B		L14-30	11.25 x 11.75 x 4.5	18.3	8-15181-01210-6
310C	•	N/A	11.25 x 11.75 x 4.5	18.2	8-15181-01211-3
310CE	•	N/A	11.25 x 11.75 x 4.5	18.2	
310D		N/A	11.25 x 11.75 x 4.5	18.1	8-15181-01212-0
510A	•	CS6375	11.25 x 11.75 x 4.5	18.5	8-15181-01213-7
510B		CS6375	11.25 x 11.75 x 4.5	18.3	8-15181-01214-4
510C	•	N/A	11.25 x 11.75 x 4.5	18.2	8-15181-01205-2
510D		N/A	11.25 x 11.75 x 4.5	18.1	8-15181-01216-8



*Add prefix "A" to any model for a factory installed 2-pole 30A circuit breaker in A&B position.


**Add suffix "1" to any model for a 125V version of that transfer switch (excludes some models, see specification catalog or call for more details).

Flush Fit Kits



K2F06
Flush Mounting Kit

FITS ALL




M
METAL

PC
POWDER
COATED
STEEL



K2F10
Flush Mounting Kit

FITS ALL



M
METAL

PC
POWDER
COATED
STEEL

Model#	Dimensions (H x W x D)	Shipping Wgt.	UPC
K2F06	16" H x 12.54" W	4.4	8-15181-01117-8
K2F10	16" H x 16.54" W	4.9	8-15181-01118-5



Replacement Parts

Reliance offers replacement parts for faulty components under warranty. Contact a customer service representative or visit our website.
RelianceControls.com



Flush Fit Kits

Replacement Parts



Outdoor Transfer Switches

FEATURES

- Raintight, lockable cabinets
- Completely pre-wired
- Easy toggle switch controls
- Liquid-tight conduit and fittings
- Bottom mounted inlet with flip cover



R304-Series Transfer Switch



30
AMP

NEMA 3R
Rated

Model#	Meters	Inlet	Dimensions (H x W x D)	Shipping Wgt.	UPC
R304A	.	L14-30	13 x 8 x 5	17.7	8-15181-01284-7
R304B		L14-30	13 x 8 x 5	17.5	8-15181-01286-1



R306-Series Transfer Switch



30
AMP

NEMA 3R
Rated



R506-Series Transfer Switch



50
AMP

NEMA 3R
Rated

Model#	Meters	Inlet	Dimensions (H x W x D)	Shipping Wgt.	UPC
R306A	.	L14-30	13 x 8 x 5	18.3	8-15181-01278-6
R306B		L14-30	13 x 8 x 5	18.1	8-15181-01289-2
R506A	.	CS6375	13 x 8 x 5	18.5	8-15181-01281-6
R506B		CS6375	13 x 8 x 5	18.3	8-15181-01294-6



*Add prefix "A" to any model for a factory installed 2-pole 30A circuit breaker in A&B position.

**Add suffix "1" to any model for a 125V version of that transfer switch (excludes some models, see specification catalog or call for more details).

OUTDOOR

SURFACE MOUNT / TRANSFER SWITCHES
FOR HOMES WITH EXTERIOR PANELS

Outdoor Transfer Switches



R308-Series

Transfer Switch



30

NEMA 3R
Rated

Model#	Meters	Inlet	Dimensions (H x W x D)	Shipping Wgt.	UPC
R308A	.	L14-30	13 x 12 x 5	24.8	8-15181-01291-5
R308B		L14-30	13 x 12 x 5	24.6	8-15181-01292-2
R508A	.	CS6375	13 x 12 x 5	25	8-15181-01295-3
R508B		CS6375	13 x 12 x 5	24.8	8-15181-01296-0



R310-Series

Transfer Switch



30

NEMA 3R
Rated



R510-Series

Transfer Switch



50

NEMA 3R
Rated

Model#	Meters	Inlet	Dimensions (H x W x D)	Shipping Wgt.	UPC
R310A	.	L14-30	13 x 12 x 5	25.3	8-15181-01279-3
R310B		L14-30	13 x 12 x 5	25.1	8-15181-01293-9
R510A	.	CS6375	13 x 12 x 5	25.6	8-15181-01282-3
R510B		CS6375	13 x 12 x 5	25.4	8-15181-01297-7



*Add prefix "A" to any model for a factory installed 2-pole 30A circuit breaker in A&B position.

**Add suffix "1" to any model for a 125V version of that transfer switch (excludes some models, see specification catalog or call for more details).



Introducing the First Combination Indoor/Outdoor Transfer Switch



FEATURES

- Sleek newly designed ABS plastic cabinet
- Swing-up raintight, lockable swing-up cover
- New illuminated watt meters
- Patented POP-Fast™ reusable knockouts
- Liquid-tight conduit and fittings
- Completely pre-wired
- Ideal for coastal areas where salt/air content is high

RN306C

Transfer Switch



30
AMP


NEMA 3R
Rated

Model#	Meters	Inlet	Dimensions (H x W x D)	Shipping Wgt.	UPC
RN306C	.	N/A	14.7 x 9.5 x 2.5	18.3	8-15181-01328-8



With a Reliance Controls Transfer Switch: When the Power Goes Out:

- 1 Connect your portable generator to the power inlet box with a Reliance power cord.
- 2 Start up your generator.
- 3 Flip the Reliance transfer switch toggles from the LINE to the GEN position and enjoy the convenience of restored power to your key appliances.

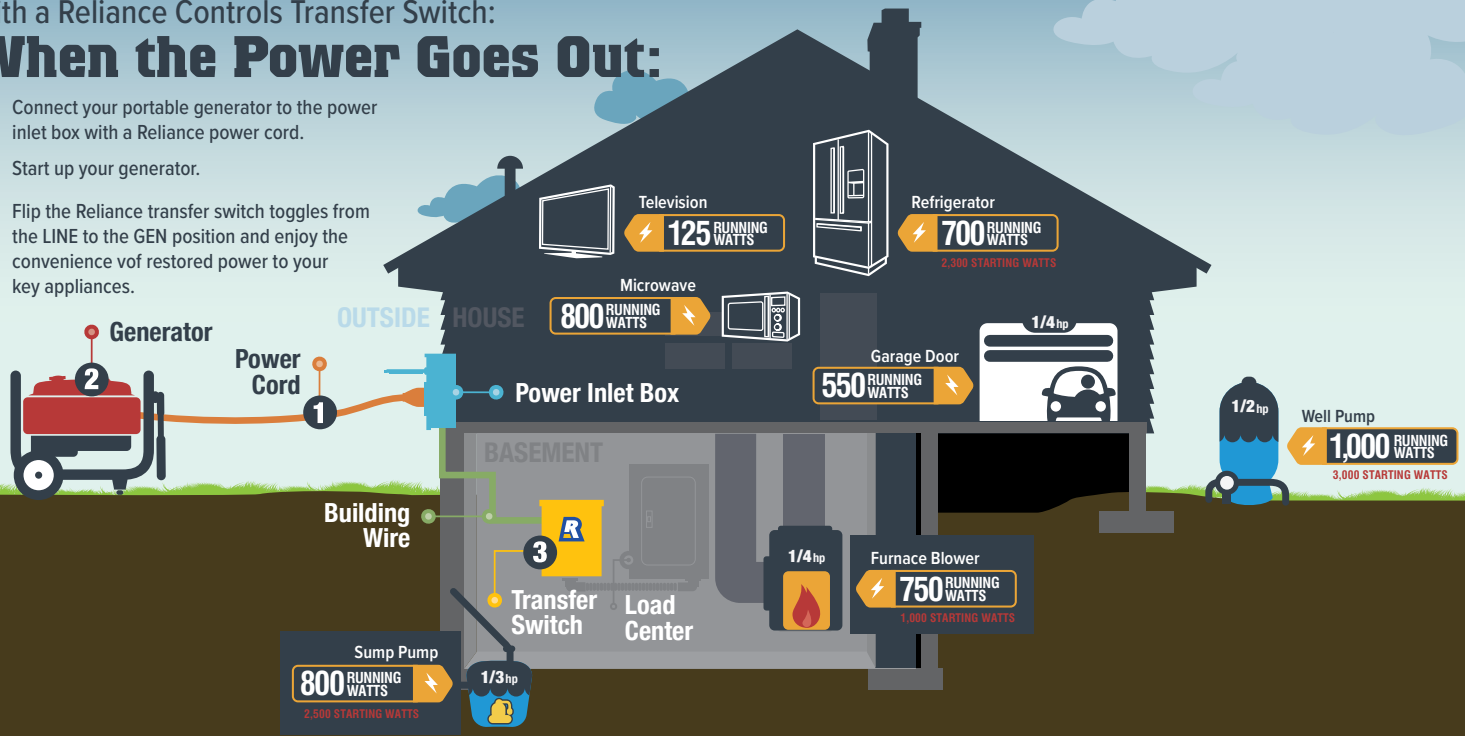

REASONS WHY PRO/TRAN® 2 IS THE ONLY LOGICAL CHOICE

1) LOW COST.

Surprisingly low. A fraction of the cost of a DPDT switch, subpanel, power inlet, fittings, conduit, circuit breakers and wire. Pro/Tran 2 transfer Switches combine all these elements in a single, compact, ready-to-install unit.

2) FAST INSTALLATION.

Extremely fast. That's because every Pro/Tran 2 transfer switch is completely prewired. Simply attach the conduit, mount the cabinet, make the necessary connections in the load center and it's ready to use.

3) SAFE OPERATION.

Ultimately safe. The double-throw, break-before-make switch action of each Pro/Tran 2 circuit keeps the generator isolated from the utility at all times. This eliminates the danger of backfeeding the utility and causing injury to repair crews as well as preventing utility power from feeding into the generator and causing damage or personal injury.

4) EASY TO USE.

Remarkably easy. Plug the generator cord into the Pro/Tran 2, or the optional power inlet box, start the generator and move the Switches on the Pro/Tran 2 from LINE to GEN. Now you have power to your critical circuits.

5) EXCEPTIONAL QUALITY.

Quite Exceptional. Every Pro/Tran 2 component is manufactured to exacting specifications and tested before assembly. Each completed Pro/Tran 2 is thoroughly tested before shipment from the factory. This exceptional level of quality is backed by an exclusive five-year limited warranty.

Your generator was designed to power much more of your home than extension cords can connect. A generator's 20, 30 and 50 amp receptacles were designed specifically to connect to your home via a transfer switch.

A transfer switch is the ONLY safe way to harness your generator's power and conveniently control each of the home circuits you will need in an emergency.

Transfer Switch Kits with Power Inlet Box and 10ft Cord

FOR GENERATORS UP TO

7,500 RUNNING
WATTS

FEATURES

- Completely pre-wired
- Easy toggle switch controls
- Interchangeable 1" circuit breakers
- Swing up protective cover

Complete turn-key kit has everything needed to make a professional transfer switch installation in a home or office, enabling the wiring system of the building to accept the full power of a portable generator to run multiple electrical appliances and devices during a power outage. For generators with NEMA L14-30 or L14-20 power outlet. These kits are packaged in vivid 4 color retail packaging and include our industry leading 30A 6-circuit or 10-Circuit prewired loadside transfer switch with built-in wattmeters, 30A outdoor power cord inlet box, 30A 10-foot generator power cord w/ L14-30 molded ends and all required wire connectors. Reliance Controls transfer switches are cULus Listed to the 1008 standard.

OUTDOOR

PORTABLE
GENERATOR

POWER
INLET BOX



INDOOR

TRANSFER
SWITCH

POWER
BACK ON!



TRANSFER SWITCH KITS

BACK-UP POWER / TRANSFER EQUIPMENT

Transfer Switch Kits



6
CIRCUIT

306CRK
Six-Circuit Kit

Grainger #422L79

INCLUDED IN KIT

306C

Back-Up Power / Transfer Switch

M
METAL

PC
POWDER
COATED
STEEL

30
AMP
L14-30

6
CIRCUIT

PB30 (Grainger #2KEP7)
Outdoor Power Inlet Box

M
METAL

PC
POWDER
COATED
STEEL

30
AMP
L14-30

NEMA 3R
Rated

PC3010M

10-Foot Outdoor Power Cord

m
MOLDED

**LED LIGHTED
FEMALE
CONNECTOR**

30
AMP
L14-30

10 GAUGE
CONDUCTORS
10/3 with Ground / SJTW

Meters	Dimensions (H x W x D)	Shipping Wgt.	UPC
.	18 x 19 x 6	18.8	8-15181-01200-7



10
CIRCUIT

310CRK
Ten-Circuit Kit

Grainger #422L80

INCLUDED IN KIT

310C

Back-Up Power / Transfer Switch

M
METAL

PC
POWDER
COATED
STEEL

30
AMP
L14-30

10
CIRCUIT

PB30 (Grainger #2KEP7)
Outdoor Power Inlet Box

M
METAL

PC
POWDER
COATED
STEEL

30
AMP
L14-30

NEMA 3R
Rated

PC3010M

10-Foot Outdoor Power Cord

m
MOLDED

**LED LIGHTED
FEMALE
CONNECTOR**

30
AMP
L14-30

10 GAUGE
CONDUCTORS
10/3 with Ground / SJTW

Meters	Dimensions (H x W x D)	Shipping Wgt.	UPC
.	26 x 19 x 5	24.1	8-15181-01202-1



Transfer Switch Kits with Power Inlet Box and 20ft Cord

FOR GENERATORS UP TO

7,500 RUNNING
WATTS



FEATURES

- Completely pre-wired
- Easy toggle switch controls
- Interchangeable 1" circuit breakers
- Swing up protective cover


Provide fast, safe and easy connection of emergency power to a home, office, store or farm. These manual transfer switch kits are designed specifically for the professional electrician. Each kit provides everything needed to connect any generator with a 125/250VAC 20A or 30A outlet to a residential or light commercial load center. These kits include a six- or ten-circuit Pro/Tran2 manual transfer switch, a 30A, 125/250VAC power inlet box, a 20-foot, 30A, 125/250VAC outdoor rated generator cord and wire connectors. The non-metallic power inlet box version is perfect for coastal areas where salt air is an issue. Reliance Controls transfer Switches are cUL1008 Listed, assembled in the USA and carry a 5-year warranty.




6 CIRCUIT **306CDK** Six-Circuit Kit

INCLUDED IN KIT


306C
Back-Up Power / Transfer Switch



PB30 (Grainger #2KEP7)
Outdoor Power Inlet Box



PC3020M (Grainger #2KEP8)
20-Foot Outdoor Power Cord




Meters	Dimensions (H x W x D)	Shipping Wgt.	UPC
.	18 x 19 x 6	22.85	8-15181-01266-3




6 CIRCUIT **306CDKN** Six-Circuit Kit

INCLUDED IN KIT


306C
Back-Up Power / Transfer Switch



PBN30 (Grainger #13V405)
Outdoor Power Inlet Box



PC3020M (Grainger #2KEP8)
20-Foot Outdoor Power Cord



Meters	Dimensions (H x W x D)	Shipping Wgt.	UPC
.	18 x 19 x 6	22.75	8-15181-01267-0

TRANSFER SWITCH KITS

BACK-UP POWER / TRANSFER EQUIPMENT

Transfer Switch Kits



10
CIRCUIT

310CDK Ten-Circuit Kit

310C

Back-Up Power / Transfer Switch

M
METAL

POWDER
COATED
STEEL

30
AMP
L14-30

10
CIRCUIT

INCLUDED IN KIT

PB30 (Grainger #2KEP7)
Outdoor Power Inlet Box

M
METAL

POWDER
COATED
STEEL

30
AMP
L14-30

NEMA 3R
Rated

PC3020M (Grainger #2KEP8)
20-Foot Outdoor Power Cord

m
MOLDED

LED LIGHTED
FEMALE
CONNECTOR

30
AMP
L14-30

10 GAUGE
CONDUCTORS
10/3 with Ground / SJTW

Meters	Dimensions (H x W x D)	Shipping Wgt.	UPC
.	26 x 19 x 5	28.5	8-15181-01207-6



10
CIRCUIT

310CDKN Ten-Circuit Kit

310C

Back-Up Power / Transfer Switch

M
METAL

POWDER
COATED
STEEL

30
AMP
L14-30

10
CIRCUIT

INCLUDED IN KIT

PBN30 (Grainger #13V405)
Outdoor Power Inlet Box

NM
NON-METAL

HIGH IMPACT
ABS
PLASTIC

30
AMP
L14-30

NEMA 3R
Rated

PC3020M (Grainger #2KEP8)
20-Foot Outdoor Power Cord

m
MOLDED

LED LIGHTED
FEMALE
CONNECTOR

30
AMP
L14-30

10 GAUGE
CONDUCTORS
10/3 with Ground / SJTW

Meters	Dimensions (H x W x D)	Shipping Wgt.	UPC
.	26 x 19 x 5	28.4	8-15181-01208-3



WKPNB30-Series

Portable Generator Through-The-Wall Kits

FEATURES

- Easy to install 6-circuit power panel
- Outdoor generator cord inlet box
- Keep out toxic carbon monoxide exhaust
- Overload breaker protection
- cULus listed components
- Designed and patented in the U.S.

Connects To This
Generator Outlet



Designed & Engineered In U.S.A



WKPNB30

Grainger #422L78




WKPNB3010

THROUGH-THE-WALL KITS

FOR PORTABLE GENERATORS

Through-The-Wall Kits

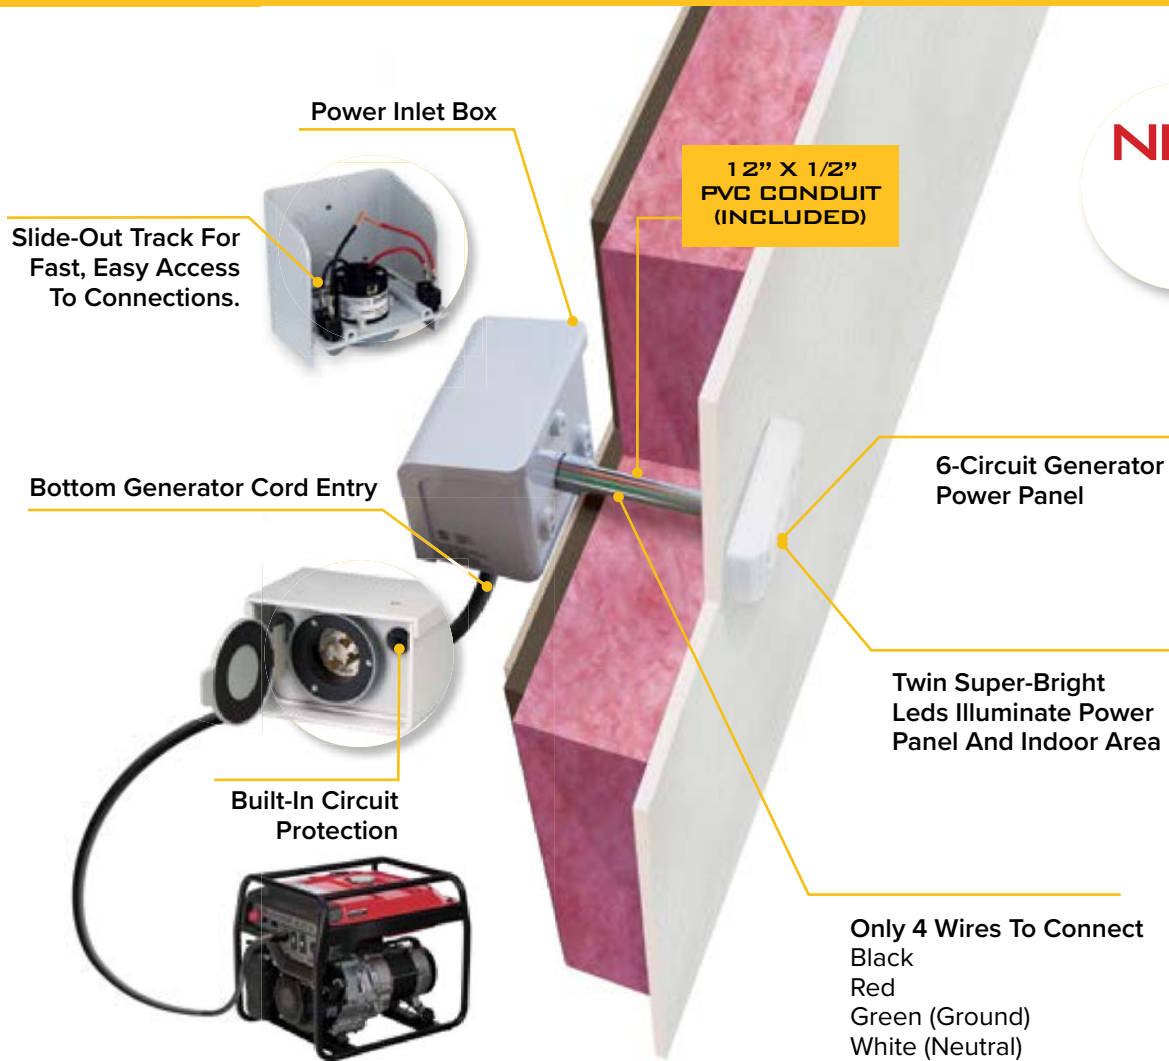

Model#	Inlet	Cord	Dimensions (H x W x D)	Shipping Wgt.	UPC
WKPNB30 (422L78)	L14-30	None	6.5 X 13.5 X 7.5	3.25	8-15181-01753-8
WKPNB3010	L14-30	10 ft	12.75 X 11.75 X 9.75	8.25	8-15181-01777-4
WKPNB3020	L14-30	20 ft	7.5 X 15 X 12.75	10.5	8-15181-01778-1
WKPNB3040	L14-30	40 ft	17.5 X 16.75 X 5	15.5	8-15181-01779-8



Furnace Transfer Switches


The Easy/Tran[®] TF transfer switch is designed for the control of a single circuit, such as a forced-air furnace, in the event of a power failure. The attached 18" flexible aluminum conduit is pre-wired and allows the TF to be easily connected at the circuit breaker panel or the furnace or at any point in between. Power can be supplied from a portable generator, inverter, RV generator, fuel cell or any standby source capable of producing sufficient current to operate the desired load. Uses standard grounded extension cord.

FEATURES

- Completely pre-wired for easy installation
- Eliminates the dangers associated with back-feeding



TF151W
Transfer Switch



TF152W
Transfer Switch



Model#	Inlet	Dimensions (H x W x D)	Shipping Wgt.	Max. Generator Running Watts	UPC
TF151W	5-15	7.5 X 4.25 X 5.75	3.16	1,875	8-51890-00025-6
TF152W	5-15	7.5 X 4.5 X 4.75	3.34	1,875	8-15181-01799-6



TF201W
Transfer Switch



TF202W
Transfer Switch



Model#	Inlet	Dimensions (H x W x D)	Shipping Wgt.	Max. Generator Running Watts	UPC
TF201W	5-20	7.5 X 4.5 X 4.75	3.16	2,500	8-15181-01074-4
TF202W	5-20	7.5 X 4.5 X 4.75	3.34	2,500	8-15181-01781-1

SPECIALTY TRANSFER SWITCHES

BACK-UP POWER / TRANSFER EQUIPMENT

Easy/Tran® Transfer Switch for Single-Circuit Control

The Reliance Easy/Tran® transfer switch is easy to install and easy to use. It is ideal for single-circuit control of farm buildings, irrigation systems, community wells, telecommunication substations, traffic signals, commercial garage doors, cell towers, sewer and water lift stations, septic pumps, industrial sump pumps, electric water heaters, electric heat and much more.



CSR Series
Transfer Switch



FEATURES

- Completely pre-wired for easy installation
- Accommodates power cord even when the cover is closed

Choose between these 5 power inlets :



Model#	Number Of Switches	Inlet	Dimensions (H x W x D)	Shipping Wgt.	Utility-On Light	UPC
CSR201	1	L5-20	8.75 X 8.25 X 6.25	9.08		8-51890-00032-4
CSR201L	2	L5-20	8.75 X 8.25 X 6.25	9.32	•	8-15181-01407-0
CSR202	2	L14-20	8.75 X 8.25 X 6.25	9.44		8-51890-00033-1
CSR202L	3	L14-20	8.75 X 8.25 X 6.25	10.22	•	8-15181-01408-7
CSR301	1	L5-30	8.75 X 8.25 X 6.25	9.28		8-51890-00034-8
CSR301L	2	L5-30	8.75 X 8.25 X 6.25	9.58	•	8-15181-01409-4
CSR302	2	L14-30	8.75 X 8.25 X 6.25	9.7		8-51890-00035-5
CSR302L	3	L14-30	8.75 X 8.25 X 6.25	10.22	•	8-15181-01410-0
CSR501	2	CS6370	8.75 X 8.25 X 6.25	10.26		8-15181-01411-7
CSR501L	3	CS6370	8.75 X 8.25 X 6.25	10.3	•	8-15181-01412-4
CSR511	3	L5-30	8.75 X 8.25 X 6.25	9.28		8-15181-01413-1
CSR511L	3	L5-30	8.75 X 8.25 X 6.25	9.58	•	8-15181-01414-8



Signa Series Transfer Switches For Traffic Intersections

Reliance Controls Signa-Series traffic signal generator transfer switches are currently installed in several states. They are pre-wired to connect quickly to traffic signal control boxes to allow a portable generator to economically control an intersection during a power outage to keep traffic running smoothly-- without a police officer.

FEATURES

- Completely pre-wired for easy installation
- Eliminates the dangers associated with back-feeding



Utility Mode
(Open)



Bottom Inlet
(Closed)



Generator Mode
(Closed)

THOUSANDS OF TRAFFIC SIGNALS IN EVERY STATE.

THOUSANDS OF CHANCES FOR TRAFFIC JAMS CAUSED BY POWER
OUTAGES AT INTERSECTIONS.



SIGNA SERIES TRANSFER SWITCHES

BACK-UP POWER / TRANSFER EQUIPMENT

Signa Series Transfer Switches



C20A
Signa Series
Transfer Switch



C30A
Signa Series
Transfer Switch



C50A
Signa Series
Transfer Switch



Model#	Number Of Switches	Inlet	Dimensions (H x W x D)	Shipping Wgt.	Utility-On Light	UPC
C20A1	1	20A Ⓢ	9 X 6 X 4.375	6.6		8-15181-01382-0
C20A1L	2	20A Ⓢ	9 X 6 X 4.375	6.6	•	8-15181-01383-7
C20A1LN	3	20A Ⓢ	9 X 6 X 4.375	6.6	•	8-15181-01384-4
C20A1N	2	20A Ⓢ	9 X 6 X 4.375	6.6		8-15181-01386-8
C20A2	2	20A Ⓢ	9 X 6 X 4.375	6.6		8-15181-01387-5
C20A2L	3	20A Ⓢ	9 X 6 X 4.375	6.6	•	8-15181-01388-2
C20A2N	3	20A Ⓢ	9 X 6 X 4.375	6.6		8-15181-01389-9
C30A1	1	30A Ⓢ	9 X 6 X 4.375	6.6		8-15181-01390-5
C30A1L	2	30A Ⓢ	9 X 6 X 4.375	6.6	•	8-15181-01392-9
C30A1LN	3	30A Ⓢ	9 X 6 X 4.375	6.6	•	8-15181-01393-6
C30A1N	2	30A Ⓢ	9 X 6 X 4.375	6.6		8-15181-01397-4
C30A2	2	30A Ⓢ	9 X 6 X 4.375	6.6		8-15181-01398-1
C30A2L	3	30A Ⓢ	9 X 6 X 4.375	6.6	•	8-15181-01399-8
C30A2N	3	30A Ⓢ	9 X 6 X 4.375	6.6		8-15181-01400-1
C50A1	2	50A Ⓢ	9 X 6 X 4.375	6.6		8-15181-01402-5
C50A1L	3	50A Ⓢ	9 X 6 X 4.375	6.6	•	8-15181-01403-2
C51A1	2	30A Ⓢ	9 X 6 X 4.375	6.6		8-15181-01404-9
C51A1L	3	30A Ⓢ	9 X 6 X 4.375	6.6	•	8-15181-01405-6






CORDS & DEVICES

Heavy-duty Plugs, Connectors & Inlets

Color Connect Cords & Devices



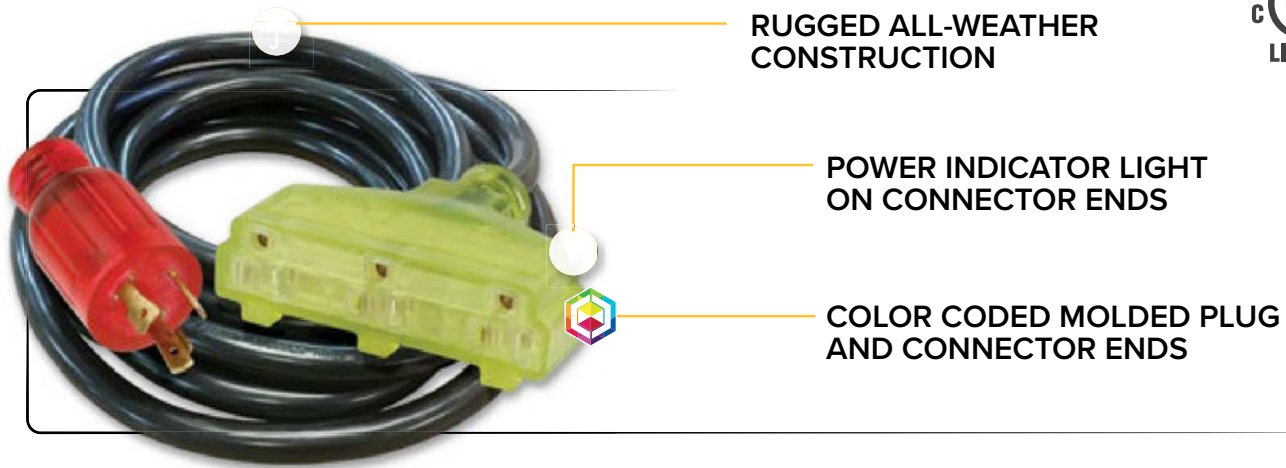

RUGGED ALL-WEATHER
CONSTRUCTION

POWER INDICATOR LIGHT
ON CONNECTOR ENDS

COLOR CODED MOLDED PLUG
AND CONNECTOR ENDS



PC20-Series

Cord Sets



20
AMP



LED Lighted
Female Connector



12/3 with Ground / SJTW

Model#	Amps	Rating, VAC	Length/Ft.	Config	Shipping Wgt.	UPC
PC2010M	20A	125/250	10	L14-20	2.9	8-15181-01321-9
PC2020M	20A	125/250	20	L14-20	4.6	8-15181-01322-6
PC2040M	20A	125/250	40	L14-20	7.8	8-15181-01323-3

- Molded male and female ends
- Rugged all-weather construction
- Locking plug and connector ends



PC30-Series

Cord Sets



30
AMP



LED Lighted
Female Connector



10/3 with Ground / SJTW

		Rating, VAC	Length/Ft.	Config	Shipping Wgt.	UPC
PC3010M	30A	125/250	10	L14-30	4.6	8-51890-00012-6
PC3020M	30A	125/250	20	L14-30	7	8-51890-00013-3
PC3025M	30A	125/250	25	L14-30	8.25	8-15181-01050-8
PC3040M	30A	125/250	40	L14-30	13.1	8-51890-00031-7

- Molded male and female ends
- Rugged all-weather construction
- Locking plug and connector ends



PC31-Series

Cord Sets



30
AMP



LED Lighted
Female Connector



Model#	Amps	Rating, VAC	Length/Ft.	Config	Shipping Wgt.	UPC
PC3110M	30A	125	10	L5-30	3.7	8-15181-01365-3
PC3120M	30A	125	20	L5-30	6.3	8-15181-01204-5
PC3140M	30A	125	40	L5-30	9.9	8-15181-01368-4

- Molded male and female ends
- Rugged all-weather construction
- Locking plug and connector ends



PC50-Series

Cord Sets



50
AMP



		g, VAC	Length/Ft.	Config	Shipping Wgt.	UPC
PC5010-14M	50A	125/250	10	14-50 MALE / CS6364	9.1	8-51890-00055-3
PC5020-14M	50A	125/250	20	14-50 MALE / CS6364	16.5	8-15181-01043-0
PC5025-14M	50A	125/250	25	14-50 MALE / CS6364	19.5	8-15181-01363-9

- Molded male and female ends
- Rugged all-weather construction
- Locking plug and connector ends



Assembled Power Cords


Assembled cords made from UL Listed components are available in various lengths. Please contact us or visit our site for more information.

RelianceControls.com




COLOR CONNECT[™]

Simply match up the color-coded ends to get from point A to B.

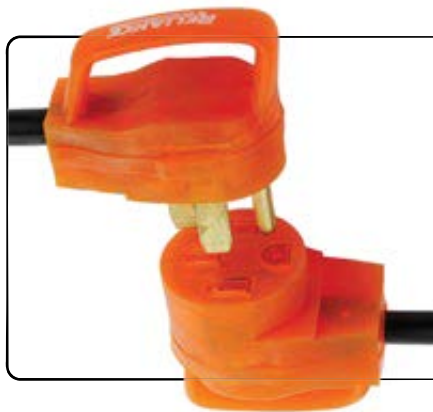



Quickly and easily connect a generator or power pedestal to your:

- RV
- Food Truck
- Home
- Cabin
- Construction site
- And much more..

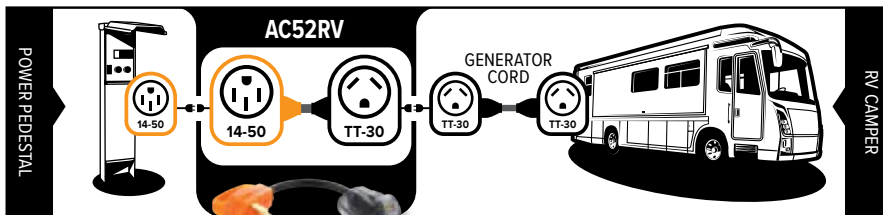

FEATURES

- Patented color identifying design
- LED lighted female end
- Watertight molded cord ends

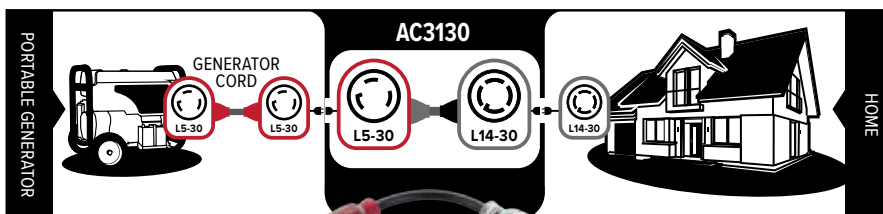
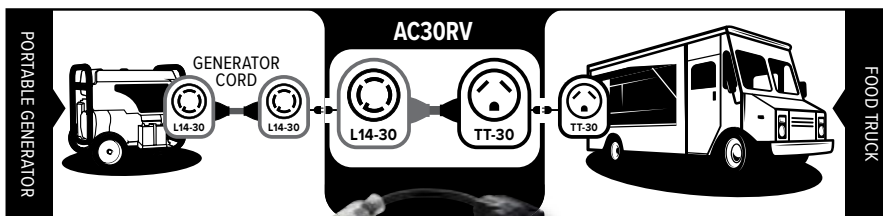


COLOR CONNECT

GENERATOR ADAPTER CORDS

Color Coding

		5-15	15 AMP	125 VAC
		L5-20	20 AMP	125 VAC
		L14-20	20 AMP	125/250 VAC
		L5-30	30 AMP	125 VAC
		TT30	30 AMP	125 VAC
		L14-30	30 AMP	125/250 VAC
		14-50	50 AMP	125/250 VAC

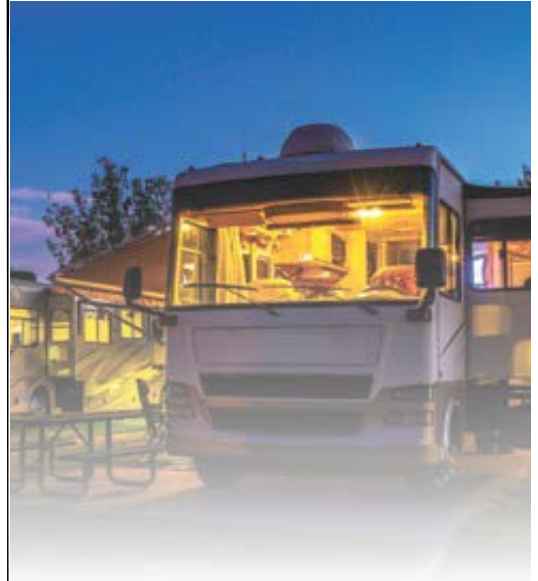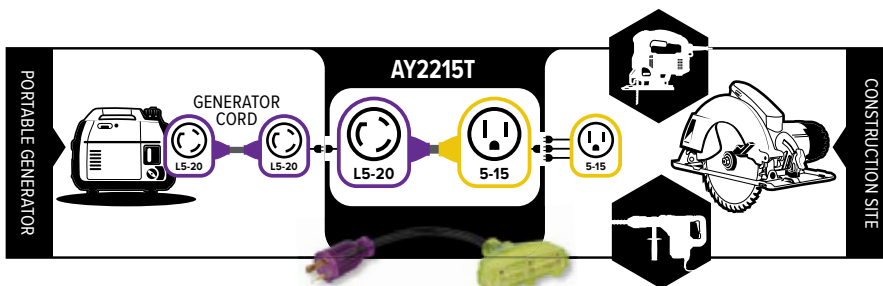

ATTENTION-GRABBING PACKAGING

Full color retail packaging for a vibrant display highlighting the patented Color Connect adapter cord system.





AC1522



15
AMP

PLUG



CONNECTOR

LED LIGHTED
FEMALE
CONNECTOR

125
VAC

1850
WATTS

12 GAUGE
CONDUCTORS



AC1531



15
AMP

PLUG



CONNECTOR

LED LIGHTED
FEMALE
CONNECTOR

125
VAC

1850
WATTS

12 GAUGE
CONDUCTORS



AC2030



20
AMP

PLUG



CONNECTOR

LED LIGHTED
FEMALE
CONNECTOR

**125/
250**
VAC

5000
WATTS

12 GAUGE
CONDUCTORS



AC30RV



30
AMP

PLUG



CONNECTOR

LED LIGHTED
FEMALE
CONNECTOR

125
VAC

3750
WATTS

10 GAUGE
CONDUCTORS



AC3130



30
AMP

PLUG



CONNECTOR

LED LIGHTED
FEMALE
CONNECTOR

125
VAC

3750
WATTS

10 GAUGE
CONDUCTORS



AC52RV



30
AMP

PLUG



CONNECTOR

LED LIGHTED
FEMALE
CONNECTOR

125
VAC

3750
WATTS


10 GAUGE
CONDUCTORS

COLOR CONNECT


GENERATOR ADAPTER CORDS




ACRV22

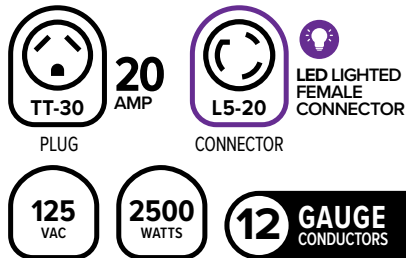


ACRV52

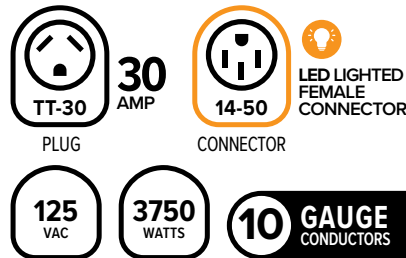


AY2215T

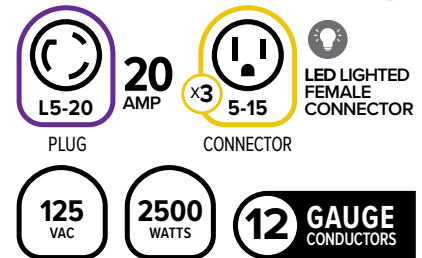

AP15RV

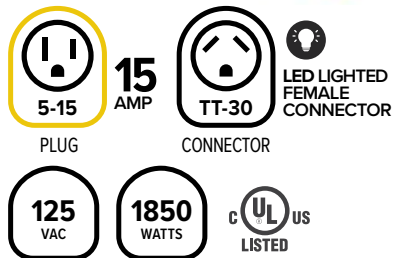

AP31RV

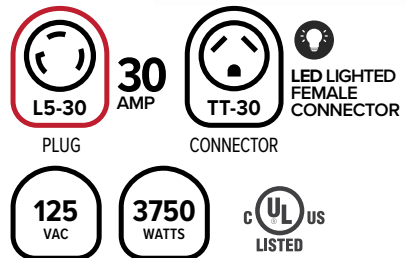

Model#	Amps	VAC	Plug	Connector	Max Watts	AWG	UPC
AC1522	15A	125V	5-15	L5-20	1850W	12	8-15181-01978-5
AC1531	15A	125V	5-15	L5-30	1850W	12	8-15181-01980-8
AC2030	20A	125/250V	L14-20	L14-30	5000W	12	8-15181-01965-5
AC30RV	30A	125V	L14-30	TT-30	3750W	10	8-15181-01977-8
AC3130	30A	125V	L5-30	L14-30	3750W	10	8-15181-01966-2
AC52RV	30A	125V	14-50	TT-30	3750W	10	8-15181-01979-2
ACRV22	20A	125V	TT-30	L5-20	2500W	12	8-15181-01982-2
ACRV52	30A	125V	TT-30	14-50	3750W	10	8-15181-01981-5
AY2215T	20A	125V	L5-20	5-15	2500W	12	8-15181-01983-9
AP15RV	15A	125V	5-15	TT-30	1850W	-	8-15180-00077-5
AP31RV	30A	125V	L5-30	TT-30	3750W	-	8-15180-00076-8

Plugs, Connectors & Inlets



L1420

Plugs, Connectors & Inlets



20
AMP



Model#	Amps	VAC	Config	Connection Type	Shipping Wgt.	UPC
L1420C	20A	125/250	L14-20	Female Connector	0.4	8-51890-00042-3
L1420P	20A	125/250	L14-20	Male Plug	0.4	8-51890-00043-0
L1420F	20A	125/250	L14-20	Flanged Inlet	0.4	8-51890-00058-4



L1430

Plugs, Connectors & Inlets



30
AMP



Model#	Amps	VAC	Config	Connection Type	Shipping Wgt.	UPC
L1430C	30A	125/250	L14-30	Female Connector	0.4	8-51890-00044-7
L1430P	30A	125/250	L14-30	Male Plug	0.4	8-51890-00045-4
L1430F	30A	125/250	L14-30	Flanged Inlet	0.4	8-51890-00009-6



L530

Plugs, Connectors & Inlets



30
AMP



Model#	Amps	VAC	Config	Connection Type	Shipping Wgt.	UPC
L530C	30A	125	L5-30	Female Connector	0.4	8-15181-01203-8
L530P	30A	125	L5-30	Male Plug	0.4	8-15181-01201-4
L530F	30A	125	L5-30	Flanged Inlet	0.4	8-15181-01370-7

WIRING DEVICES

PLUGS, CONNECTORS & INLETS



LL550

Plugs, Connectors & Inlets



50
AMP



LOCKING



Model#	Amps	Rating, VAC	Config	Connection Type	Shipping Wgt.	UPC
LL550P	50A	125/250	CS6365	Male Plug	0.7	8-51890-00027-0
LL550C	50A	125/250	CS6364	Female Connector	0.7	8-51890-00020-1
LL550F	50A	125/250	CS6375	Flanged Inlet	0.7	8-15181-01372-1



1450

Plugs, Connectors & Inlets



50
AMP



STRAIGHT
BLADE

Model#	Amps	Rating, VAC	Config	Connection Type	Shipping Wgt.	UPC
1450P	50A	125/250	14-50	Male Plug	0.9	8-15181-01169-7
1450C	50A	125/250	14-50	Female Connector	0.9	8-15181-01170-3
1450FC	50A	125/250	14-50	Flanged Outlet with Flip Lid	0.9	8-15181-01174-1
1450FP	50A	125/250	14-50	Flanged Inlet with Flip Lid	0.9	8-15181-01173-4
1450RP	50A	125/250	14-50	Right-Angle Plug	0.9	8-15181-01171-0
1450RC	50A	125/250	14-50	Right-Angle Connector	0.9	8-15181-01172-7

The logo features the text "PANEL/LINK" in a white, sans-serif font. The text is positioned on the left side of a rectangular area that has a blue background with white lightning bolts. The right side of this rectangular area is cut off by a diagonal line that extends from the top right corner of the page. The overall design is modern and industrial.

PANEL/LINK®

MANUAL TRANSFER PANELS & GENERATOR-READY LOAD CENTERS

Heavy-duty manual transfer equipment for portable generators to 30kw.

NO POWER? NO PROBLEM!

WE'VE GOT YOU LINKED UP



TCA SERIES

MANUAL TRANSFER PANELS

The Panel/Link[®] TCA circuit breaker combinations of 30A-125A utility and 30A-100A generator. The interlinked circuit breakers keep the generator isolated from the utility at all times, even with the dead front removed. The TCA features a heavy-duty bus. The TCA is suitable for service entrance and may be used as a main panel for a single load or to feed a sub-panel. Available in indoor and outdoor enclosures, the TCA has no provisions for branch circuit breakers.



50AMP - 100AMP



30AMP - 100AMP



TCA - Indoor



Model#	Max. Utility Input Amps	Max. Gen. Input Amps	Gen. Power Inlet Included	Watt Meters Included	UPC
TCA0503D	50	30	No	No	8-15181-01627-2
TCA0505D	50	50	No	No	8-15181-01428-5
TCA0603D	60	30	No	No	8-15181-01430-8
TCA0606D	60	60	No	No	8-51890-00021-8
TCA1003D	100	30	No	No	8-15181-01433-9
TCA1005D	100	50	No	No	8-15181-01435-3
TCA1006D	100	60	No	No	8-51890-00039-3
TCA1010D	100	100	No	No	8-15181-01437-7

Dimensions: 13.25"h x 11.38"w x 3.94"d Shipping Weight: 12lbs.

* Not suitable for service entrance in Canada



TCA - Outdoor




**POWDER
COATED
STEEL**

NEMA 3R
Rated

Model#	Max. Utility Input Amps	Max. Gen. Input Amps	Gen. Power Inlet In- cluded	Watt Meters Included	UPC
TCA0503DR	50	30	No	NO	8-15181-01427-8
TCA0505DR	50	50	No	NO	8-15181-01429-2
TCA0603DR	60	30	No	NO	8-15181-01431-5
TCA0605DR	60	50	No	NO	8-15181-01432-2
TCA0606DR	60	60	No	NO	8-51890-00022-5
TCA1003DR	100	30	No	NO	8-15181-01434-6
TCA1005DR	100	50	No	NO	8-15181-01436-0
TCA1006DR	100	60	No	NO	8-51890-00023-2
TCA1010DR	100	100	No	NO	8-15181-01438-4


Dimensions: 13.25"h x 11.38"w x 3.94"d Shipping Weight: 12lbs.

TCA Series Knockout Patterns

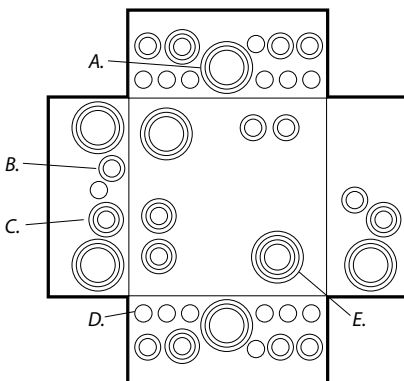

Indoor TCA Series


- A. 6 K.O.s for 1", 1.25", 1.5" Conduit
- B. 10 K.O.s for .5", .75" Conduit
- C. 6 K.O.s for 5", .75", 1" Conduit
- D. 15 K.O.s for .5" Conduit
- E. 1 K.O.s for .75", 1", 1.25", 1.5" Conduit

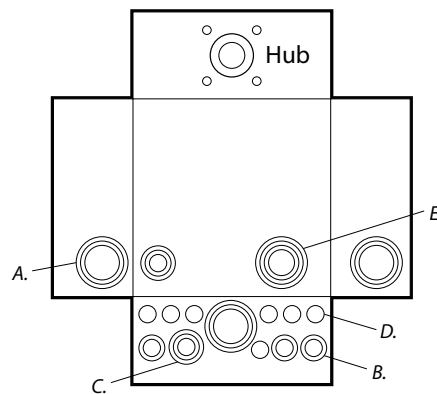

Outdoor TCA Series

- A. 3 K.O.s for 1", 1.25", 1.5" Conduit
- B. 3 K.O.s for .5", .75" Conduit
- C. 2 K.O.s for 5", .75", 1" Conduit
- D. 7 K.O.s for .5" Conduit
- E. 1 K.O.s for .75", 1", 1.25", 1.5" Conduit

TCA Series Wiring Diagram

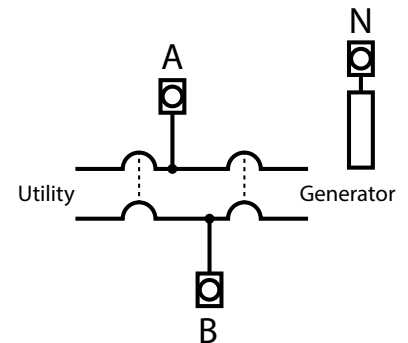

* Not suitable for service entrance in Canada




TRB SERIES

MANUAL TRANSFER PANELS

The **Panel/Link[®] TRB** offers circuit breaker combinations of 30A - 125A utility and 30A - 125A generator. Interlinked circuit breakers keep the generator isolated from the utility at all times, even with the deadfront removed. The TRB features a heavy-duty copper bus. Suitable for service entrance, the TRB may be used as a main panel or a sub-panel. The TRB is available in indoor and outdoor enclosures and has provision for 4/8 branch circuits.



30AMP - 125AMP



30AMP - 125AMP



TRB - Indoor



Model#	Max. Utility Input Amps	Max. Gen. Input Amps	Gen. Power Inlet Included	Watt Meters Included	UPC
TRB0303A	30	30	Yes	Yes	8-15181-01439-1
TRB0303C	30	30	No	Yes	8-15181-01440-7
TRB0303D	30	30	No	No	8-15181-01441-4
TRB0603A	60	30	Yes	Yes	8-15181-01442-1
TRB0603C	60	30	No	Yes	8-15181-01443-8
TRB0603D	60	30	No	No	8-15181-01445-2
TRB0605A	60	50	Yes	Yes	8-15181-01447-6
TRB0605C	60	50	No	Yes	8-15181-01448-3
TRB0605D	60	50	No	No	8-15181-01450-6
TRB0606C	60	60	No	Yes	8-15181-01452-0
TRB0606D	60	60	No	No	8-15181-01454-4
TRB1003A	100	30	Yes	Yes	8-51890-00046-1
TRB1003C	100	30	No	Yes	8-15181-01456-8
TRB1003D	100	30	No	No	8-15181-01458-2
TRB1005A	100	50	Yes	Yes	8-15181-01460-5
TRB1005C	100	50	No	Yes	8-15181-01049-2
TRB1005D	100	50	No	No	8-15181-01462-9
TRB1006C	100	60	No	Yes	8-15181-01464-3
TRB1006D	100	60	No	No	8-51890-00094-2
TRB1010D	100	100	No	No	8-15181-01467-4
TRB1203D	125	30	No	No	8-15181-01719-4
TRB1205D	125	50	No	No	8-15181-01720-0
TRB1206D	125	60	No	No	8-15181-01721-7
TRB1210D	125	100	No	No	8-15181-01722-4
TRB1212D	125	125	No	No	8-15181-01723-1

* Not suitable for service entrance in Canada

Dimensions: 14.75"h x 12.38"w x 3.88"d Shipping Weight: 15lbs.




TRB - Outdoor



NEMA 3R
Rated

TRB Series Wiring Diagram

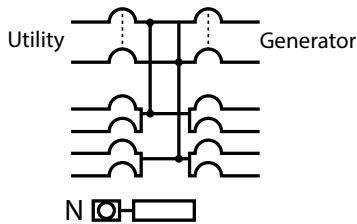


Model#	Max. Utility Input Amps	Max. Gen. Input Amps	Gen. Power Inlet Included	Watt Meters Included	UPC
TRB0603CR	60	30	No	Yes	8-15181-01444-5
TRB0603DR	60	30	No	No	8-15181-01446-9
TRB0605CR	60	50	No	Yes	8-15181-01449-0
TRB0605DR	60	50	No	No	8-15181-01451-3
TRB0606CR	60	60	No	Yes	8-15181-01453-7
TRB0606DR	60	60	No	No	8-15181-01455-1
TRB1003CR	100	30	No	Yes	8-15181-01457-5
TRB1003DR	100	30	No	No	8-15181-01459-9
TRB1005CR	100	50	No	Yes	8-15181-01461-2
TRB1005DR	100	50	No	No	8-15181-01463-6
TRB1006CR	100	60	No	Yes	8-15181-01465-0
TRB1006DR	100	60	No	No	8-15181-01466-7
TRB1010DR	100	100	No	No	8-15181-01468-1
TRB1203DR	125	30	No	No	815181017248
TRB1205DR	125	50	No	No	815181017255
TRB1206DR	125	60	No	No	815181017262
TRB1210DR	125	100	No	No	815181017279
TRB1212DR	125	125	No	No	815181017286

Dimensions: 14.75"h x 12.13"w x 4.25"d Shipping Weight: 16lbs.


* Not suitable for service entrance in Canada

TRB Series Knockout Patterns



Indoor TRB Series

- A. 4 K.O.s for .25" Conduit
- B. 2 K.O.s for .38", .5", .75", 1", 1.25" Conduit
- C. 10 K.O.s for .5", .75", 1" Conduit
- D. 52 K.O.s for .5" Conduit
- E. 12 K.O.s for .38", .5", .75" Conduit
- F. 10 K.O.s for 1", 1.25", 2", 2.5" Conduit
- G. 3 K.O.s for 1.75" Ground Bar Mounting
- H. Mounting Hole (4 places)



Outdoor TRB Series

- A. HS Type Hub Opening (Max. 2" Conduit)
- B. 4 K.O.s for 1", 1.25", 1.5" Conduit
- C. 8 K.O.s for .5" Conduit
- D. 1 K.O. .25"
- E. 2 K.O.s for .5", .75" Conduit
- F. 3 K.O.s for 5", .75", 1" Conduit
- G. Embossed .5" Mounting Hole (4 places)



Above models are UL listed for the following branch circuit breakers: Siemens Type QP, QT, QPH, HQP, QPH, QPHF, QFP, QE, QEH; Square D Series HOM 100A Max. Murry Type MP; C-H/Westinghouse Series BD, BR, BQ, GFC 100A Max.




TRK SERIES MANUAL TRANSFER PANELS

The Panel/Link[®] TRK offers circuit breaker combinations of 30A - 100A utility and 30A - 60A generator. Interlinked circuit breakers keep the generator isolated from the utility at all times, even with the deadfront removed. The TRK features a heavy-duty copper bus. The TRK is available in indoor and outdoor enclosures and has provision for 12 branch circuits.



30AMP - 100AMP



30AMP - 60AMP



TRK - Indoor



Model#	Max. Utility Input Amps	Max. Gen. Input Amps	Gen. Power Inlet Included	Watt Meters Included	UPC
TRK0303C	30	30	No	Yes	8-15181-01645-6
TRK0303D	30	30	No	No	8-15181-01646-3
TRK0503C	50	30	No	Yes	8-15181-01647-0
TRK0503D	50	30	No	No	8-15181-01648-7
TRK0505C	50	50	No	Yes	8-15181-01649-4
TRK0505D	50	50	No	No	8-15181-01650-0
TRK0603C	60	30	No	Yes	8-15181-01506-0
TRK0603D	60	30	No	No	8-15181-01651-7
TRK0605C	60	50	No	Yes	8-15181-01652-4
TRK0605D	60	50	No	No	8-15181-01653-1
TRK0606C	60	60	No	Yes	8-15181-01730-9
TRK0606D	60	60	No	No	8-15181-01654-8
TRK1003C	100	30	No	Yes	8-15181-01655-5
TRK1003D	100	30	No	No	8-15181-01656-2
TRK1005C	100	50	No	Yes	8-15181-01657-9
TRK1005D	100	50	No	No	8-15181-01658-6
TRK1006C	100	60	No	Yes	8-15181-01731-6
TRK1006D	100	60	No	No	8-15181-01659-3

Dimensions: 15.75"h x 12.38"w x 3.38"d

* Not suitable for service entrance in Canada



TRK - Outdoor




NEMA 3R
Rated

Model#	Max. Utility Input Amps	Max. Gen. Input Amps	Gen. Power Inlet Included	Watt Meters Included	UPC
TRK0303DR	30	30	No	No	8-15181-01660-9
TRK0503DR	50	30	No	No	8-15181-01661-6
TRK0505DR	50	50	No	No	8-15181-01662-3
TRK0603DR	60	30	No	No	8-15181-01663-0
TRK0606DR	60	60	No	No	8-15181-01664-7
TRK1003DR	100	30	No	No	8-15181-01665-4
TRK1005DR	100	50	No	No	8-15181-01666-1
TRK1006DR	100	60	No	No	8-15181-01667-8

Dimensions: 18"h x 12.5"w x 5"d


* Not suitable for service entrance in Canada

TRK Series Knockout Patterns

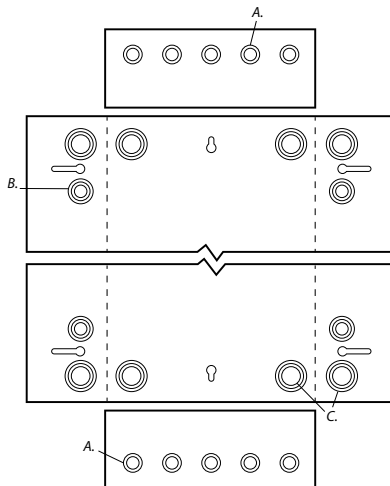

Indoor TRK Series


- A. 10 K.O.s for .5", .75" Conduit
- B. 4 K.O.s for .5", .75", 1" Conduit
- C. 4 K.O.s for .75", 1", 1.25" Conduit

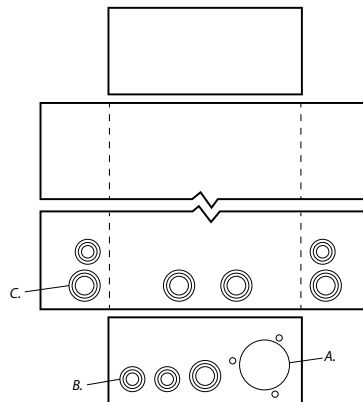

Outdoor TRK Series

- A. Opening for RCC Flanged Inlets
- B. 4 K.O.s for 5", .75", 1" Conduit
- C. 5 K.O.s for .75", 1", 1.25" Conduit

TRK Series Wiring Diagram

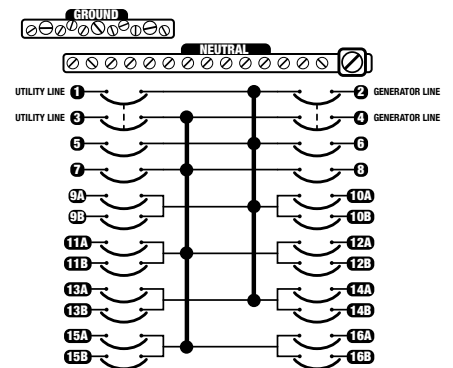

Above models are UL listed for the following branch circuit breakers: Siemens Type QP, QT, QPH, HQP, QPH, QPHF, QFP, QE, QEH; Square D Series HOM 100A Max. Murry Type MP; C-H/Westinghouse Series BD, BR, BQ, GFC 100A Max.



TTH SERIES

MANUAL TRANSFER PANELS

The Panel/Link[®] TTH includes a 200A utility main breaker and a 30A - 125A generator breaker. The circuit breakers are interlinked to keep the generator isolated from the utility at all times, even with the deadfront removed. The TTH features a heavy-duty copper bus. The TTH is designed as a stand-alone, generator-ready load center and is suitable for service entrance. Available in indoor and outdoor enclosures, the TTH has provision for 16/32 branch circuits. Power Inlet not included.



200AMP



30AMP - 125AMP



TTH - Indoor




Model#	Max. Utility Input Amps	Max. Gen. Input Amps	Gen. Power Inlet Included	Watt Meters Included	UPC
TTH2003C	200	30	No	Yes	8-15181-01533-6
TTH2003D	200	30	No	No	8-15181-01534-3
TTH2005C	200	50	No	Yes	8-15181-01536-7
TTH2005D	200	50	No	No	8-15181-01537-4
TTH2006C	200	60	No	Yes	8-15181-01539-8
TTH2006D	200	60	No	No	8-15181-01540-4
TTH2010D	200	100	No	No	8-15181-01542-8
TTH2012D	200	125	No	No	8-15181-01544-2

Dimensions: 30"h x 14.38"w x 3.94"d

* Not suitable for service entrance in Canada



TTH - Outdoor




NEMA 3R
Rated

Model#	Max. Utility Input Amps	Max. Gen. Input Amps	Gen. Power Inlet Included	Watt Meters Included	UPC
TTH2003DR	200	30	No	No	8-15181-01535-0
TTH2005DR	200	50	No	No	8-15181-01538-1
TTH2006DR	200	60	No	No	8-15181-01541-1
TTH2010DR	200	100	No	No	8-15181-01543-5
TTH2012DR	200	125	No	No	8-15181-01545-9

Dimensions: 33"h x 14.38"w x 3.94"d


* Not suitable for service entrance in Canada

TTH Series Knockout Patterns

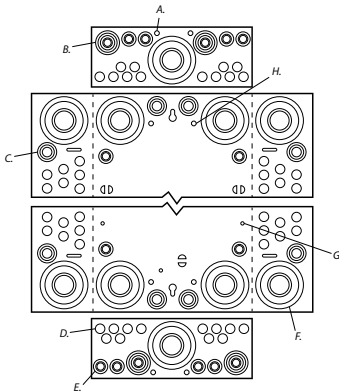

Indoor TTH Series


- A. 4 K.O.s for .25" Conduit
- B. 2 K.O.s for .38", .5", .75", 1", 1.25" Conduit
- C. 10 K.O.s for .5", .75", 1" Conduit
- D. 52 K.O.s for .5" Conduit
- E. 12 K.O.s for .38", .5", .75", Conduit
- F. 10 K.O.s for 1", 1.25", 2", 2.5" Conduit
- G. 3 K.O.s for 1.75" Ground Bar Mounting
- H. Mounting Hole (4 places)



Outdoor TTH Series

- A. HS Type Hub Opening (Max. 2.5" Conduit)
- B. 1 K.O.s for 1", 1.25", 1.5", 2", 2.5" Conduit
- C. 4 K.O.s for 5", .75", 1" Conduit
- D. 12 K.O.s for .5", .75" Conduit
- E. 1 K.O. .25"
- F. 3 K.O.s for .5" Conduit
- G. 3 K.O.s for 1.5", 2", 2.5" Conduit
- H. Embossed .5" Mounting Hole (4 places)

TTH Series Wiring Diagram

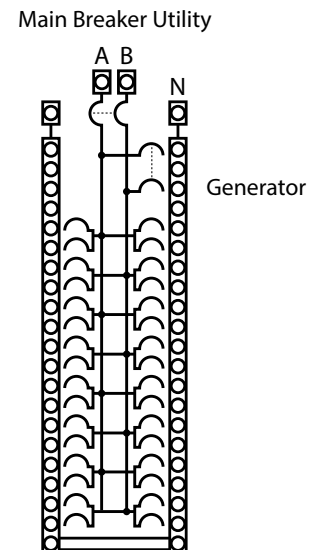

Above models are UL listed for the following branch circuit breakers: Siemens Type QP, QT, QPH, HQP, QPH, QPHF, QFP, QE, QEH; Square D Series HOM 100A Max. Murry Type MP; C-H/Westinghouse Series BD, BR, BQ, GFC 100A Max.



TTV SERIES

MANUAL TRANSFER PANELS

The **Panel/Link[®] TTV** includes a 150A - 200A main circuit breaker interlinked and a 30A - 125A generator circuit breaker. The interlinked circuit breakers keep the generator isolated from the utility at all times, even with the cover or deadfront removed. The TTV features a heavy-duty copper bus. The TTV is suitable for service entrance and provides for 36 branch circuits. Dual wattmeters, for balancing generator load, are optional.



UTILITY

150AMP - 200AMP



GENERATOR

30AMP - 125AMP



TTV - Indoor



Model#	Max. Utility Input Amps	Max. Gen. Input Amps	Gen. Power Inlet Included	Watt Meters Included	UPC
TTV1503C	150	30	No	Yes	8-15181-01634-0
TTV1503D	150	30	No	No	8-15181-01554-1
TTV1505C	150	50	No	Yes	8-15181-01553-4
TTV1505D	150	50	No	No	8-15181-01554-1
TTV2003C	200	30	No	Yes	8-15181-01030-0
TTV2003D	200	30	No	No	8-15181-01557-2
TTV2005C	200	50	No	Yes	8-15181-01069-0
TTV2005D	200	50	No	No	8-15181-01562-6
TTV2006C	200	60	No	Yes	8-51890-00080-5
TTV2006D	200	60	No	No	8-15181-01029-4
TTV2010D	200	100	No	No	8-15181-01034-8
TTV2012D	200	125	No	No	8-15181-01573-2

Dimensions: 39"h x 14.38"w x 3.94"d

Shipping Weight: 45lbs.

* Not suitable for service entrance in Canada



TTV - Outdoor



NEMA 3R
Rated


Model#	Max. Utility Input Amps	Max. Gen. Input Amps	Gen. Power Inlet Included	Watt Meters Included	UPC
TTV1505DR	150	50	No	No	8-15181-01555-8
TTV2003DR	200	30	No	No	8-15181-01559-6
TTV2005DR	200	50	No	No	8-15181-01564-0
TTV2006DR	200	60	No	No	8-15181-01568-8
TTV2010DR	200	100	No	No	8-15181-01571-8
TTV2012DR	200	125	No	No	8-15181-01575-6

Dimensions: 40"h x 14.25"w x 4.5"d

Shipping Weight: 45lbs.


* Not suitable for service entrance in Canada

TTV Series Knockout Patterns

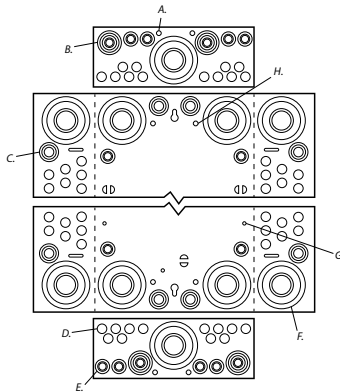

Indoor TTV Series

- A. 4 K.O.s for .25" Conduit
- B. 2 K.O.s for .38", .5", .75", 1", 1.25" Conduit
- C. 10 K.O.s for .5", .75", 1" Conduit
- D. 52 K.O.s for .5" Conduit
- E. 12 K.O.s for .38", .5", .75", Conduit
- F. 10 K.O.s for 1", 1.25", 2", 2.5" Conduit
- G. 3 K.O.s for 1.75" Ground Bar Mounting
- H. Mounting Hole (4 places)




Outdoor TTV Series

- A. HS Type Hub Opening (Max. 2.5" Conduit)
- B. 1 K.O.s for 1", 1.25", 1.5", 2", 2.5" Conduit
- C. 4 K.O.s for 5", .75", 1" Conduit
- D. 12 K.O.s for .5", .75" Conduit
- E. 1 K.O. .25"
- F. 3 K.O.s for .5" Conduit
- G. 3 K.O.s for 1.5", 2", 2.5" Conduit
- H. Embossed .5" Mounting Hole (4 places)

TTV Series Wiring Diagram

Main Breaker Utility

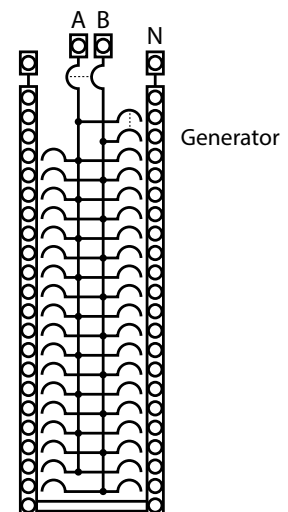

Above models are UL listed for the following branch circuit breakers: Siemens Type QP, QT, QPH, HQP, QPH, QPHF, QFP, QE, QEH; Square D Series HOM 100A Max. Murry Type MP; C-H/Westinghouse Series BD, BR, BQ, GFC 100A Max.




TWB SERIES

MANUAL TRANSFER PANELS

The Panel/Link[®] TWB includes a 150A - 200A main circuit breaker interlinked with a 30A - 125A generator circuit breaker feeding a heavy-duty copper bus with feed-through lugs. The interlinked circuit breakers keep the generator isolated from the utility at all times, even with the deadfront removed. The TWB is suitable for service entrance and may be used as main panel or feed-through to a sub-panel or main panel. The TWB has provisions for 4/8 branch circuits and is ideal for applications requiring the entire service panel to be available for generator power.



150AMP - 200AMP



30AMP - 125AMP

TWB - Outdoor




NEMA 3R
Rated



Model#	Max. Utility Input Amps	Max. Gen. Input Amps	Gen. Power Inlet Included	Watt Meters Included	UPC
TWB1503DR	150	30	No	No	8-15181-01577-0
TWB1505DR	150	50	No	No	8-15181-01042-3
TWB1506DR	150	60	No	No	8-15181-01578-7
TWB1510DR	150	100	No	No	8-15181-01579-4
TWB1512DR	150	125	No	No	8-15181-01580-0
TWB2003DR	200	30	No	No	8-15181-01581-7
TWB2005DR	200	50	No	No	8-15181-01583-1
TWB2006DR	200	60	No	No	8-15181-01028-7
TWB2010DR	200	100	No	No	8-15181-01586-2
TWB2012DR	200	125	No	No	8-15181-01064-5

TWB Series Wiring Diagram

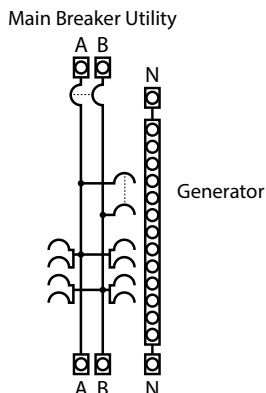

Dimensions: 27"h x 17.5"w x 6"d

Shipping Weight: 45lbs.

* Not suitable for service entrance in Canada



Above models are UL listed for the following branch circuit breakers: Siemens Type QP, QT, QPH, HQP, QPH, QPHF, QFP, QE, QEH; Square D Series HOM 100A Max. Murry Type MP; C-H/Westinghouse Series BD, BR, BQ, GFC 100A Max.





PK-Series

Power Inlet



NEMA 3R
Rated



Model#	Rating, VAC	Config	Max. Gen. Input	Dimensions (H x W x D)	Shipping Wgt.	UPC
PK20	20A @ 125/250V	L14-20	5kW	3 x 3 x 2	1	8-15181-01011-9
PK30	30A @ 125/250V	L14-30	7.5kW	3 x 3 x 2	1	8-15181-01007-2
PK50	50A @ 125/250V	CS6375	12.5kW	3 x 3 x 2.5	1	8-15181-01008-9

Suitable for installation into a 2-1/2 inch knockout on most indoor or outdoor Panel/Link® transfer panels or load centers. Excludes TCA, TRB outdoor, TRH, TRK, XRH and XRK models.





CIRCUIT TESTERS & HOME MONITORING PRODUCTS

By listening to our customers as they prepare and react to power outages, we've developed this innovative group of electrical **CIRCUIT TESTERS**. We designed them to make generator transfer switch installation as well as everyday electrical jobs easier and safer.

Our storm-related **HOME MONITORING PRODUCTS** warn you of power outages and home flooding, alert you to accidental power interruption to important plug-in devices and even phone you anywhere if the temperature in your home or cabin approaches freezing.



CIRCUIT TESTERS



Volt Snooper Non-Contact Voltage Detector

Item#	Description	UPC	Pack Qty.
THP101	Non-Contact Voltage Detector	8-51890-00001-0	10

- Handy pen-size device checks for the presence of live voltage between 50- 1000 AC Volts (50- 60 Hz) without need to contact bare wire leads.
- Visual and audible signal indicates current.
- Pushbutton activation of voltage detection.



Circuit Scout Circuit Breaker Locator

Item#	Description	UPC	Pack Qty.
THP109	Circuit Breaker Locator and Wiring Analyzer	8-15181-01277-9	5

- Electrician-inspired plug-in device for detection of the right circuit breaker the first time, every time.
- Plug the Circuit Scout into the outlet you want to trace. Turn on sonic and increase volume as needed. Then go turn off the correct breaker to stop sonic.
- Eliminates need for a second person on the job.
- Built in wiring analyzer.



Circuit Screamer Circuit Breaker Finder Plus

Item#	Description	UPC	Pack Qty.
THP109MA	Circuit Screamer	8-15181-01993-8	5

- Electrician inspired.
- Plug into live outlet. Locator screams at 105 dB until correct circuit breaker is turned off. Adjustable volume.
- No need for a second person at load center.
- Comes with standard screw-in socket adapter for ceiling lights - to trace wall switches.



PowerOUT! Power Failure Light And Alarm

Item#	Description	UPC	Pack Qty.
THP207M	Power Failure Emergency Light & Alarm	8-51890-00062-1	5

- A compact plug-in emergency light and alarm. Under normal utility power conditions the PowerOUT is a subtle night light. But when a power outage occurs, it becomes a 78dB alarm with a powerful LED path- or portable flashlight that lasts up to 3 hours.



SoniCord Key Appliance Power Failure Alarm

Item#	Description	UPC	Pack Qty.
THP111	Plug-In Appliance Load Tester	8-15181-01056-0	3

- Essential for monitoring Home Freezers, refrigerators, aquarium and other key home appliances. Plugs in-line between the power outlet and the appliance being monitored. Sounds piercing signal for 90 minutes to warn you a power failure has occurred. Two rechargeable batteries included.

& HOME MONITORING PRODUCTS

Early Warning Sump Pump Alarm & Flood Alert

Item#	Description	UPC	Pack Qty.
THP205	Sump Pump Alarm and Flood Alert	8-51890-00061-4	5

- This alarm sounds an extra-loud 105dB alarm when water in a sump pump crock rises above a level you set. Accessory floor sensor for laundry rooms.
- Features include**
- Wall-mountable
 - 6-foot sensor probe wire with crimp-on sinker weight to allow sensor to hang in sump crock at correct level.



Detects Unwanted Water or Flooding Loud 105dB Siren

AmWatt Plug-In Appliance Load Tester

Item#	Description	UPC	Pack Qty.
THP103	Plug-In Appliance Load Tester	8-51890-00004-1	3

- Instant reading of either Watts or Amps used by any plug-in device.
- Determine the wattage rating you'll need from a generator in a power outage.
- Plug AmWatt into a 120 Volt live outlet. Plug your appliance into AmWatt. Read watts (up to 1875) or amps (up to 15) on LCD display.



Grainger #2KEP9

26 IN CORD

UL LISTED

Rugged, high-impact construction

PowerBack Utility Power Return Warning Alert

Item#	Description	UPC	Pack Qty.
THP108	Plug-In Voltage Indicator	8-15181-01055-3	1

- PowerBACK connects to your main electrical panel to alert you when utility power returns after a power outage. For use when entire panel is shut down while a generator is used.



Grainger #13V403

UL LISTED

Loud 100dB Siren

CheckOut PLUG-IN CIRCUIT ANALYZER AND GFCI CHECK

Item#	Description	UPC	Pack Qty.
THP102	Plug-In Circuit Analyzer and GFCI Check	8-15181-01066-9	5
THP102P	Plug-In Circuit Analyzer and GFCI Check 40 in. Cord for remote readings.	8-15181-01067-6	5

- Plug CheckOUT or CheckOUT PRO circuit analyzers into 120 Volt standard or GFCI outlet. LCD light pattern indicates any wiring flaws. Push button for GFCI check.



Grainger #13V404

40 IN CORD

UL LISTED

P/VI Plug-In Voltage Indicator

Item#	Description	UPC	Pack Qty.
THP105	Plug-In Voltage Indicator	8-51890-00056-0	5

- Plug PIVI into any home or portable generator outlet. Read the voltage level output on the LED lights
- Voltage Readings: RED- Too High (over 132 Volts) = can damage home devices; GREEN- Good (108-132 Volts) = home devices are safe; AMBER- Too Low = can damage home devices.



WATT METER BOXES

MB SERIES

WATT METER BOXES

The Reliance watt meter box is ideal for use with any 125/250V installation where balancing the generator load is necessary for optimum performance.



MB30

MB Series Watt Meter Boxes



HIGH IMPACT
ABS PLASTIC


NEMA 3R
Rated

Model#	Amps	VAC	Watts	Shipping Wgt.	UPC
MB30	30A	125/250	7,500	3.5	8-15181-01031-7
MB60	60A	125/250	15,000	3.5	8-15181-01035-5

Dimensions: 6.375 w x 8.5 h x 3.25 d

FEATURES

- Industrial grade, high-impact cabinet
- Clear, lockable cover makes reading the meters quick and easy
- Cabinet features our patented PopFast™ knock-outs, making running wiring in and out a breeze
- Inductive current transformers to pass the hot wires through
- Left or right hinge options for best orientation in tight spaces

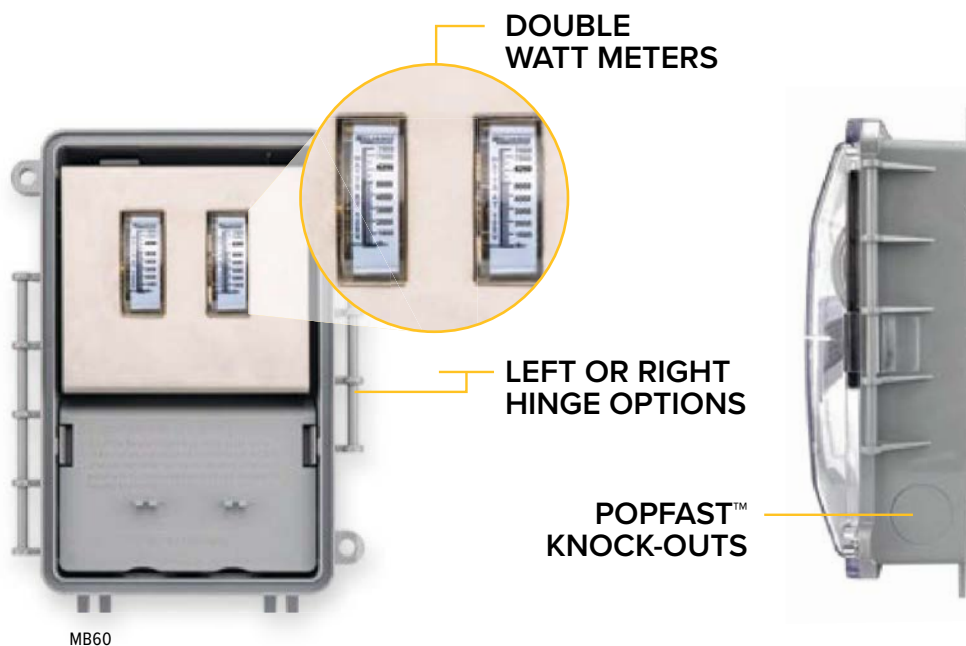

MB60

RELIANCE[®]

CONTROLS

TRUSTED
— SINCE —
1909



PRO GRADE

Reliance Controls also offers Time Switches, Photo Controls, Weatherproof In-Use Covers, In-Wall Timers, Ceiling Fan Boxes, Occupancy Sensors, and more.


Scan this QR code to visit our website for more information.

RelianceControls.com





SINCE
1909



RelianceControls.com