




SCN65XP 15°

TOOL SPECIFICATIONS

Trigger	Contact actuation
Op. Pressure	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 CPM)	9.54 scfm
Air Inlet	3/8" NPT
Weight	8 lbs (3.6 kgs)
Height	14.1" (359 mm)
Length	12.88" (327 mm)
Width	5.38" (137 mm)
Main Body Material	Aluminum

FASTENER SPECIFICATIONS

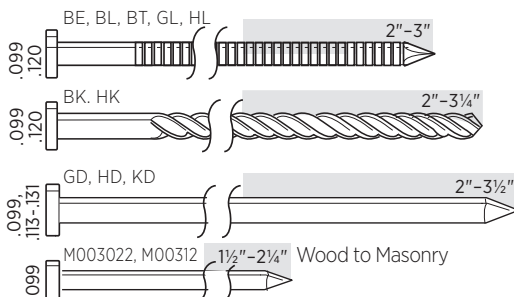

Capacity	225 - 275
Length	2" - 3 1/2"
Shank	.099" - .131"
Collation	15° flat wire welded coil
Series	BK, BL, BT, GD, GL, HD, HK, HL, KD, M00

INCLUDES

- 5 year limited warranty

SOLD SEPARATELY

PARTS KIT

YK0366	Repair kit
--------	------------



3 1/2" Rugged-Duty Coil Nailer

ITEM (flat safety): #540101N

(toenail safety): #540104

The powerful and rugged SCN65XP coil nailer drives up to a 3 1/2" nail, while still being light enough for a one-handed operation. It can hold up to 275 nails for maximum productivity in a wide variety of applications.

APPLICATIONS

- For on-site manufactured housing, including sheathing, decking, subflooring, and exterior decks. Also, industrial markets such as heavy-duty pallet construction, pallet repair, crate and box assembly

FEATURES AND BENEFITS

- Highest power-to-weight ratio in its class
- High load capacity (up to 275 nails)
- E-Z load design saves time
- Fast cycle time increases productivity
- Adjustable depth-of-drive allows for precise countersink

SCN65XP

3½" Rugged-Duty Coil Nailer

ITEM (flat safety): #540101N
(toenail safety): #540104



360° Adjustable Exhaust
quiet design.

Highest Power-To-Weight
Ratio In Its Class
light enough for one-handed operation.

Tool-Free Adjustable Depth-of-Drive
allows user to achieve precise fastener
placement.

Debris Shield
protects work piece & operator.

Comfort Grip
reduces fatigue
increases productivity.

High Load Capacity
up to 275 nails.

EZ-Load Design
open magazine door, lets you
easily see when to reload.



Choose the right actuation mode

Sequential Actuation (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tool to ensure proper use and safety precautions. For additional information on SENCO fastening systems and how SENCO will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: senco.com