



EDGE CUT KEYS




■ Speed 044 Lever Operation (Semi-Automatic)

**Grainger Part #
52HN52**

The spring-loaded carriage on Speed 044 is engaged by the press of a button. The lever is then moved manually to control the carriage movement during the cutting cycle.

- The spring loaded carriage applies consistent cutting pressure
- Rotating, four sided, nickel plated jaws for clamping most edge cut type keys
- Slotted jaw surfaces accommodate tip stop bars
- Wide 3 1/2" (88.9 mm) spacing between clamps accommodate large bow (head) and long blade keys, including flip style keys
- Depth tracer system with micro adjustment for precise calibration in increments of 00098" (0.025mm)
- Electro-magnetic "main" safety switch with a separate cutter motor switch for easy access.
- Large transparent cutter safety shield with storage area for accessories
- Large drawer-type swarf (chip) tray under the carriage for easy access
- Counter mounting bracket included

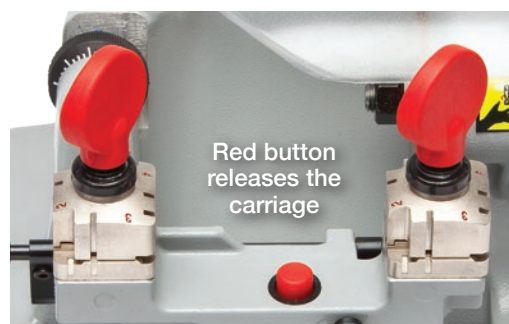

Technical Data

Power Supply:	120V-60Hz, Rated Current 4.1 Amps
Motor:	.35 HP, single phase, 1650 rpm
Cutter:	BC0599XXXX TiN coated HSS
Cutter Guide:	BJ1161XXXX
Brush:	BJ0929XXXX 3/8" (10 mm) Nylon

Dimensions:

Width:	22.8" (580 mm)
Depth:	18.1" (460 mm)
Height:	9.8" (250 mm)
Weight:	31 lbs. (14 kg)