



TN11G1P **PIN NAILER**

SPECIFICATIONS

Trigger	Sequential Dual Trigger
Op. Pressure	70-100 psi (4.8 - 6.9 bar)
Air Consumption (60 CPM)	1.1 scfm
Air Inlet	¼" NPT
Weight	2.3 lbs (1.0 kg)
Height	7.5" (191 mm)
Length	7.5" (191 mm)
Width	1.9" (48 mm)
Main Body Material	Aluminum

FASTENERS


Series	CZ
Capacity	100
Range	½" - 1⅝" (12mm - 35mm)
Gauge	23
Shank	.025" (.64mm)
Collation	Straight glued strip

INCLUDES

Carrying Case
¼" Fitting

SOLD SEPARATELY

Parts Kit
YK0910 Repair Kit

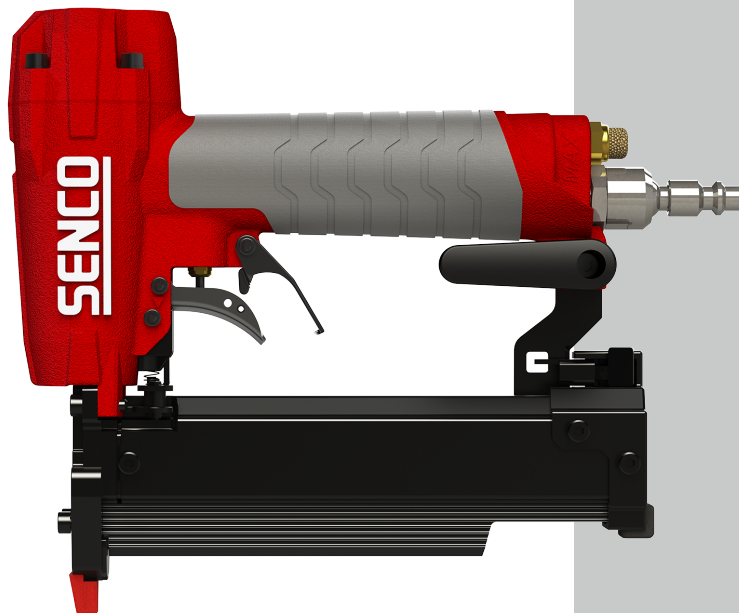

1⅜" PIN NAILER

The TN11G1P is a 23-gauge pin nailer that is capable of driving ½" to 1⅝" pins into dense hardwoods like oak without splitting the material or requiring any touch-up work. Featuring SENCO's oil-less design, the tool does not require routine lubrication, which saves you time and allows you to get right to work.

TOOL OVERVIEW

- Oil-less design eliminates the need for routine lubrication
- Dry fire lockout reduces tool wear and indicates when to reload
- Ultra-narrow nosepiece allows access to tight corners and other hard to reach areas
- Reversible belt hook mounts to either side of the tool
- No-mar pad prevents damage to the worksurface

APPLICATIONS

Fine wood working, molding, decorative trim.



1 3/8" PIN NAILER



1

OIL-LESS DESIGN

Routine lubrication is not required. Saving you time with daily maintenance

5

NO-MAR PAD

Protects the worksurface from being scratched or damaged. Extra no-mar pad included.

9

METAL MAGAZINE

Increased durability

2

DRY FIRE LOCKOUT

Reduces tool wear and indicates the need to reload fasteners

6

REAR EXHAUST WITH EMBEDDED MUFFLER

Directs air away from the operator and worksurface

10

SWIVEL PLUG

For added maneuverability

3

ULTRA-NARROW NOSEPIECE

Easy access to tight corners and other hard to reach areas

7

DUAL TRIGGER

Added safety to prevent accidental fires

11

ALUMINUM MAINBODY

Durable and lightweight

4

REVERSIBLE BELT HOOK

Mounts to either side of the tool for right or left-handed use

8

MAGAZINE ADJUSTS TO FASTENERS

Automatically conforms to fit different pin lengths

12

ON BOARD WRENCH

To remove front plate for easy jam clearance

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. For additional information on Senco fastening systems and how Senco will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: www.Senco.com.